


①

PARKVIEW AVE N.E.

RODMAN AVE N.E.

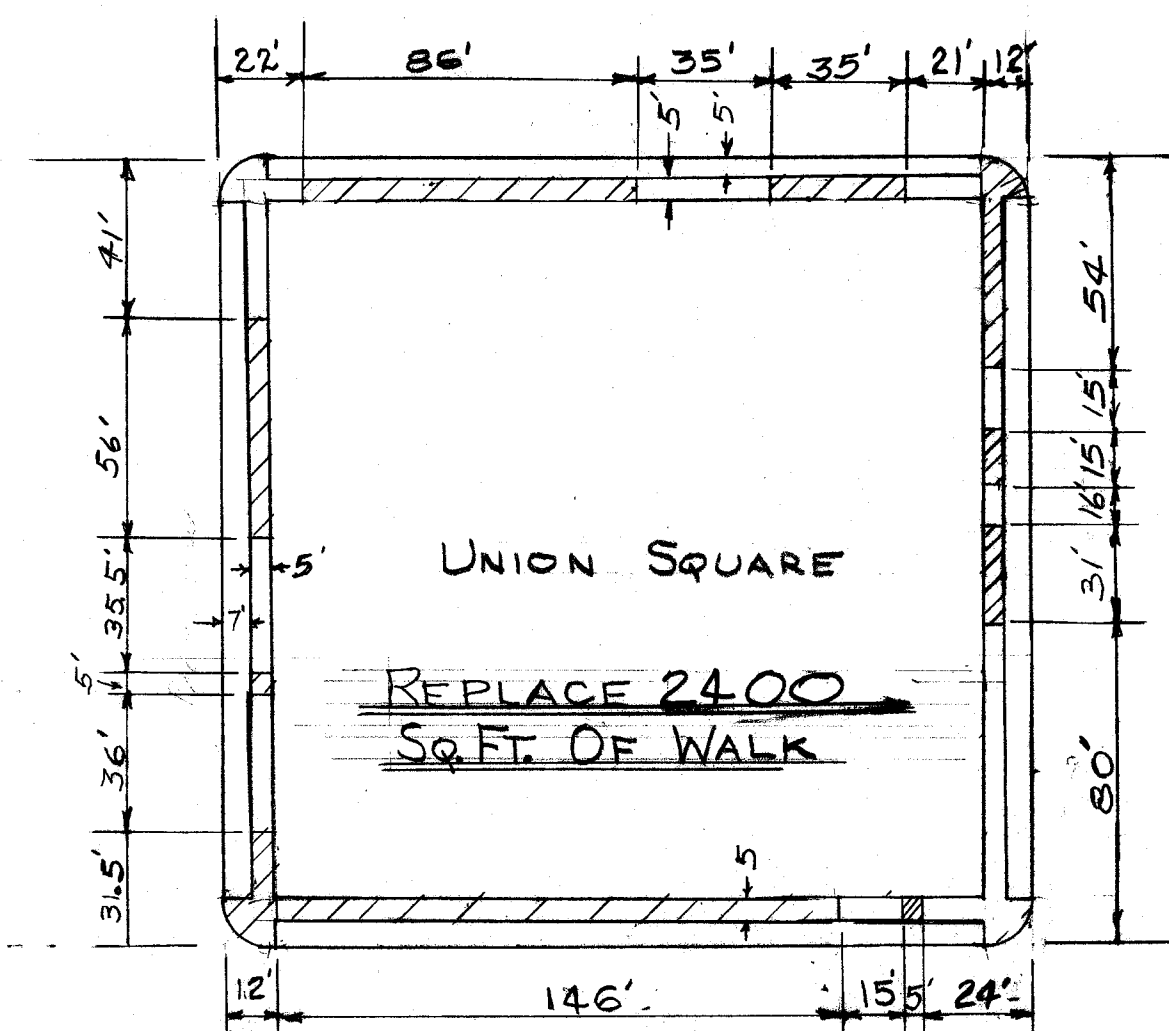


ANDREW AVE N.E.

WALES RD. N.E.

②

PARKVIEW AVE N.E.

WILLIAMS AVE. N.E.

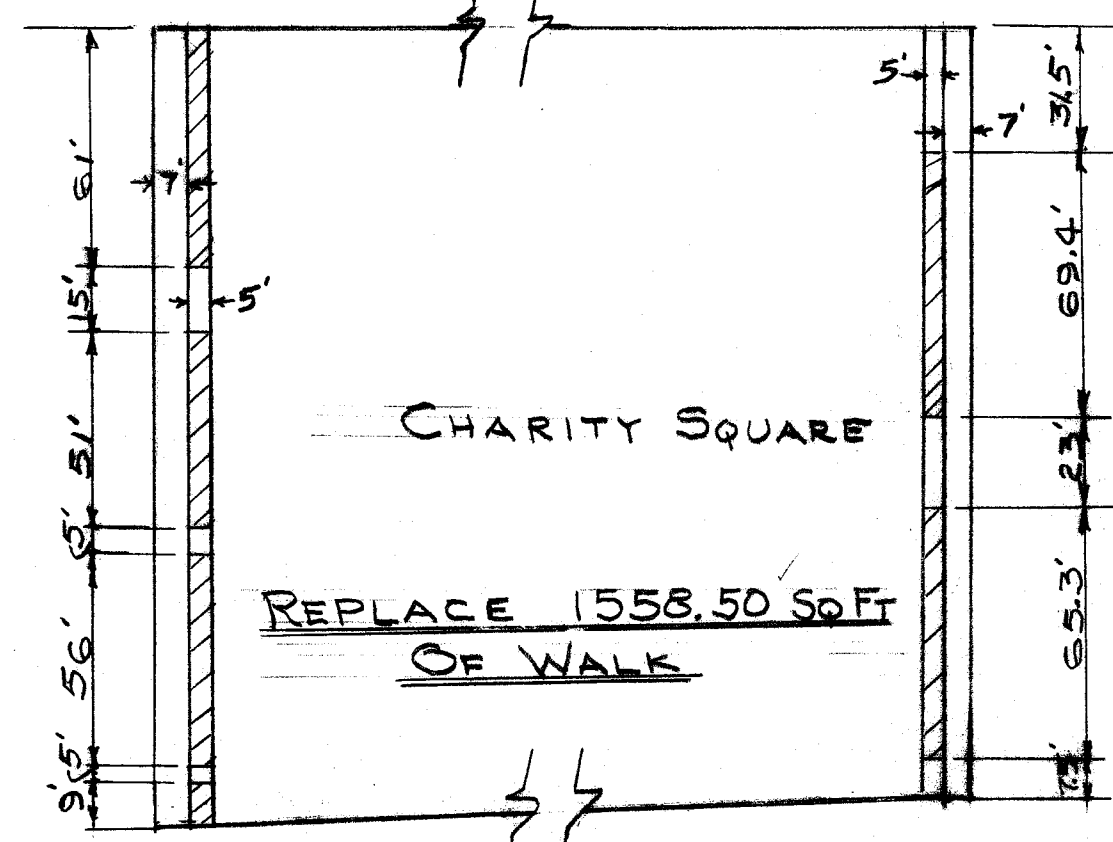


ROSLYN AVE. N.E.

WALES RD. N.E.

③

W. RESERVOIR DR. N.E.

HANKINS RD. N.E.

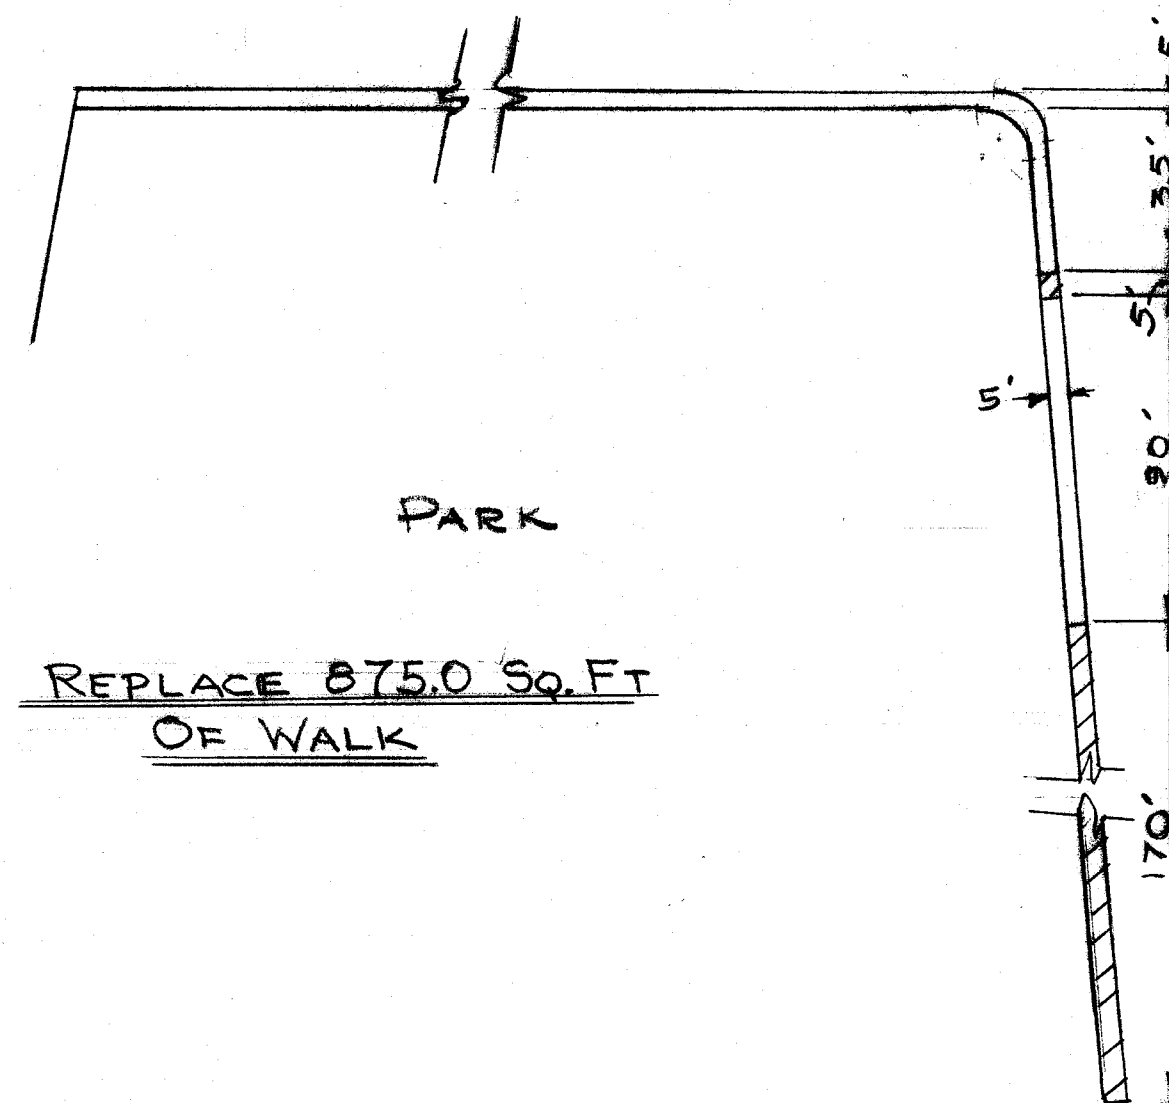


PARK

PHILLIPS RD. N.E.

⑥

SIXTH ST. S.W.

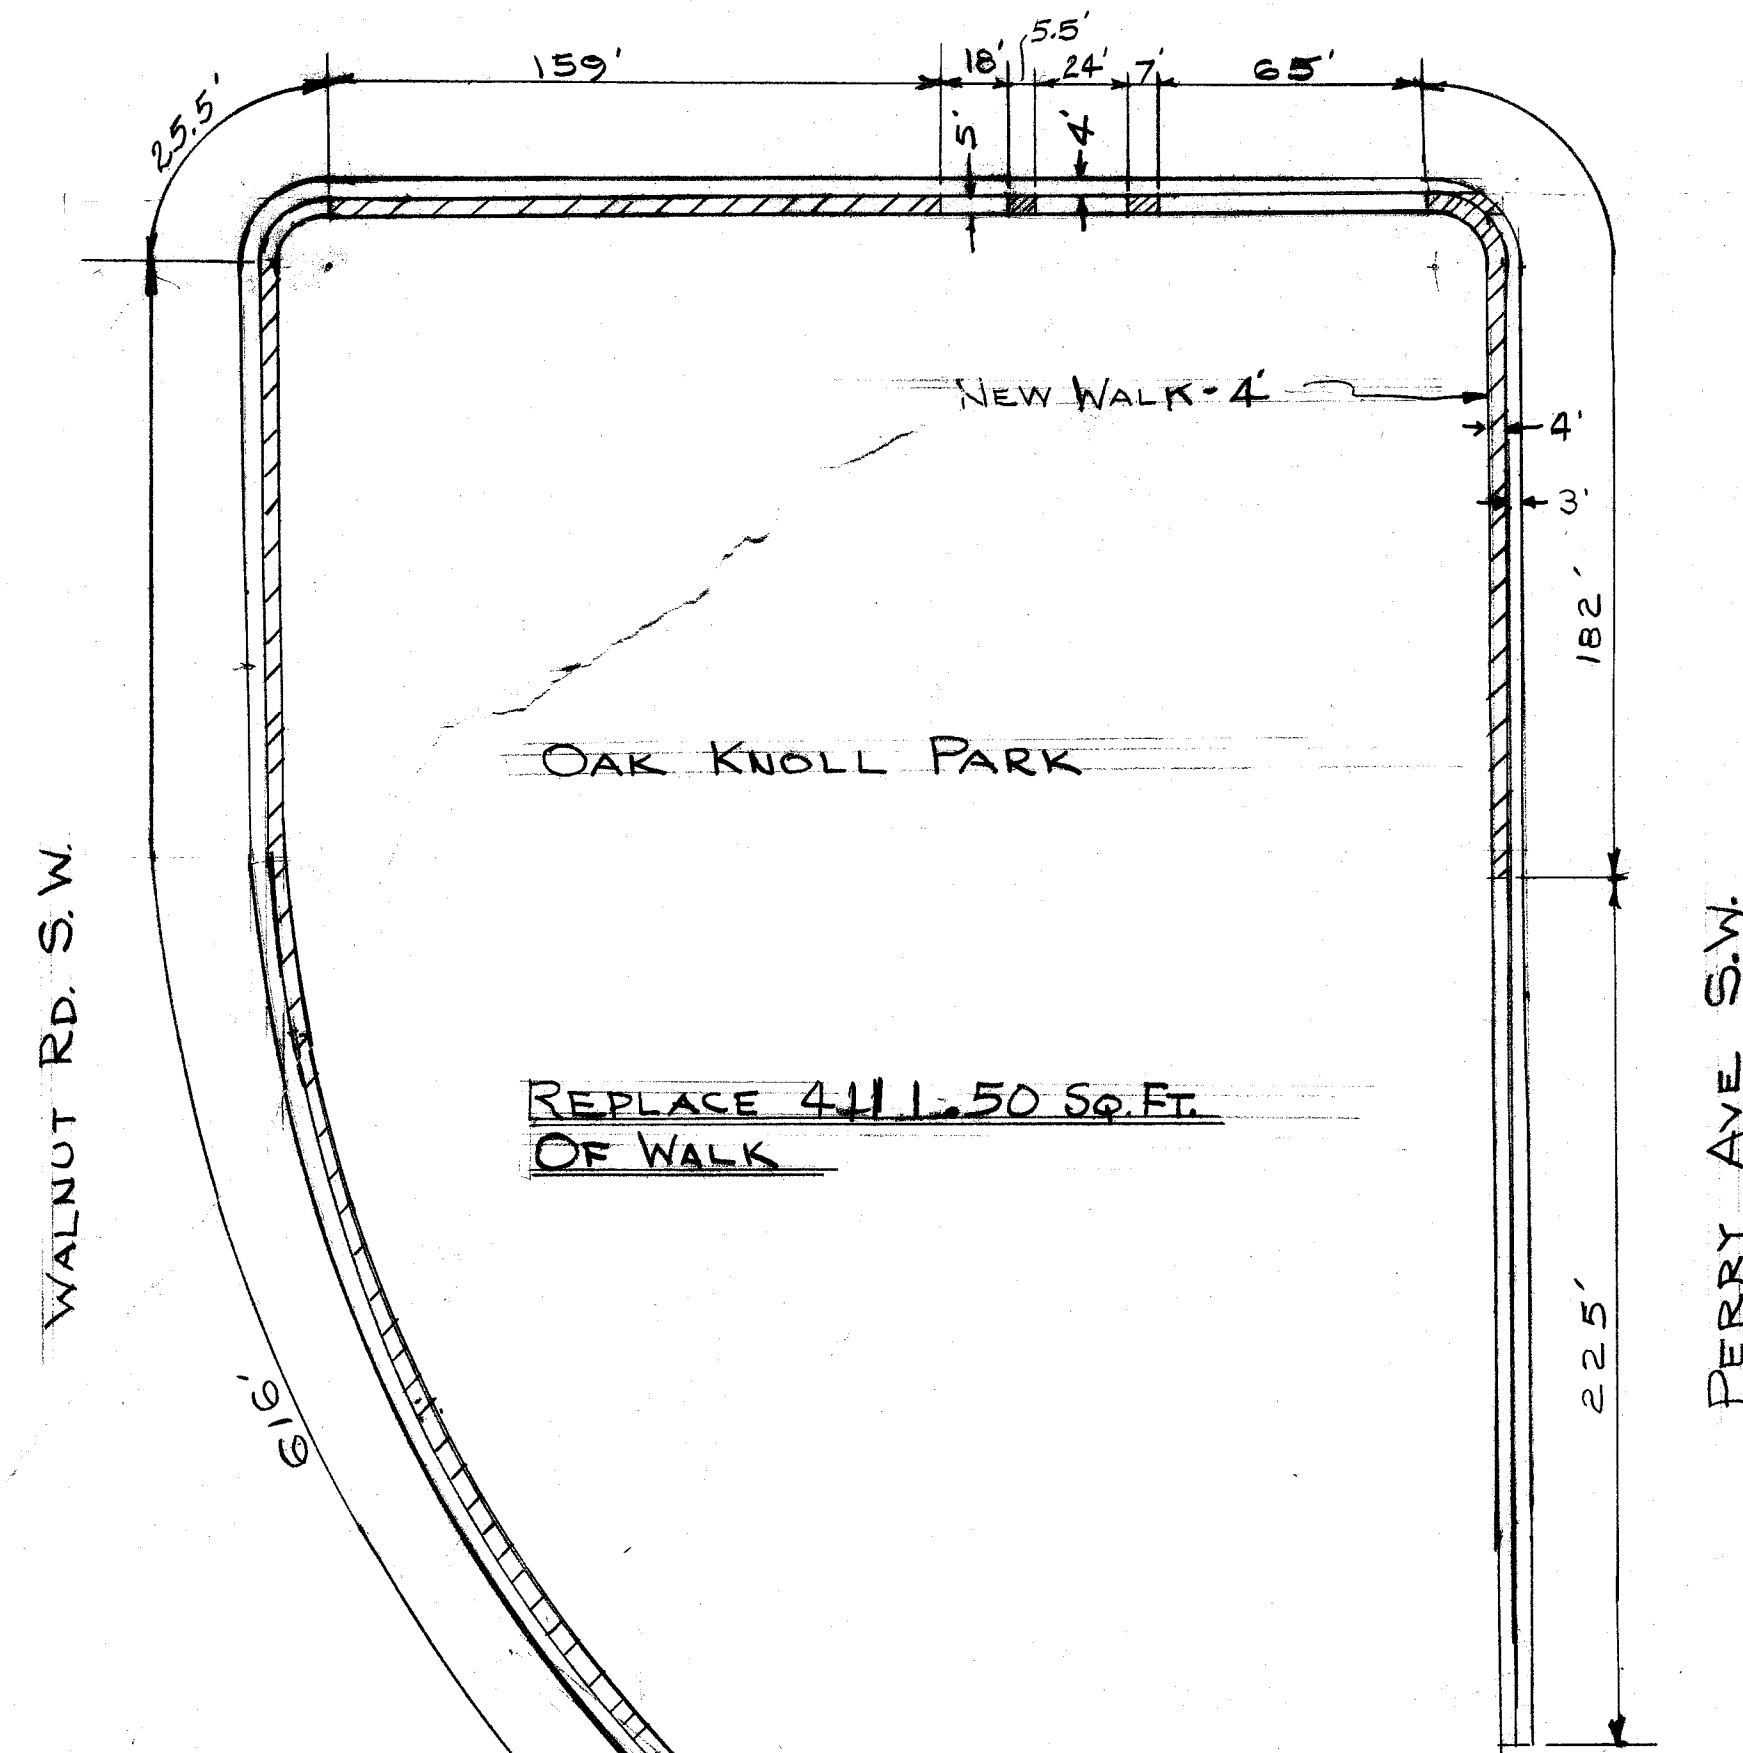

OAK KNOLL PARK

WALNUT RD. S.W.

PERRY AVE S.W.

FIRST ST. S.E.

REPLACE 450'x70' SLAB

TREMONT AVE. S.E.

136'

ERIE AVE S.

APARTMENTS

CITY PARKING LOT

REPLACE 2138.50 Sq. Ft. OF WALK AT NEW GRADE


⑤

WATER ST. N.W.

REPLACE 2330 Sq. Ft. OF WALK (5')

SIXTH ST. N.W.

ENTRANCE TO LINCOLN PLAYGROUND



WALK TO BE REPLACED

GENERAL NOTES

IN WALKS TO BE REPLACED- DISTANCES SHOWN, ARE IN LINEAL FT. NOT SQUARE FT. PLANS INDICATE THE GENERAL AREA OF CONSTRUCTION, THE CITY ENGINEER WILL MARK THE EXACT AREA OF CONSTRUCTION OF THE WALKS TO BE REPLACED. WHEN THE WALKS TO BE REPLACED END AT A FALSE JOINT, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO SAW THE FALSE JOINT, IN THE ADJOINING GOOD SLAB IS CRACKED OR DAMAGED, WHILE REMOVING THE BAD SLAB, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO REPLACE THE SLAB AT HIS OWN EXPENSE. THE CITY'S SPECIFICATIONS ON CONCRETE WILL PREVAIL, EXCEPT AS NOTED IN GENERAL NOTES. WHEN UNSUITABLE MATERIAL IS ENCOUNTERED, WHILE REMOVING THE BAD CONCRETE WALKS, THE CONTRACTOR WILL EXCAVATE THE UNSUITABLE MATERIAL, REPLACE IT WITH SUITABLE AND COMPACT IT TO SPECIFICATIONS.

ANY SEEDING OR ADDITIONAL TOPSOIL THAT IS NEEDED WILL BE REPLACED BY THE PARK DEPT. THE WIDTH OF EXCAVATION IS TO BE KEPT TO A MINIMUM. LIMESTONE AGGREGATE WILL BE USED IN THE 4" THICK CONCRETE WALKS. CONTRACTOR WILL FURNISH ALL BARRICADES AND LIGHTS THAT ARE NECESSARY, THIS WILL BE DONE AT HIS EXPENSE. CITY WILL FURNISH LINE AND GRADE STAKES WHEN NEEDED. CONTRACTOR SHALL PAY INSPECTOR AT TIME AND ONE-HALF REGULAR RATE AFTER 4:30 P.M. CONTRACTOR WILL CLEAN-UP PROJECT SITE TO THE SATISFACTION OF THE INSPECTOR BEFORE FINAL ESTIMATE IS PAID. SITE MAP WILL BE FOUND IN THE CONTRACT BOOK. ALL CONCRETE WALKS ARE TO BE 4" THICK. EXPANSION JOINTS ARE TO BE INSTALLED PER ENGINEERS ORDER, THIS MATERIAL WILL BE IN THE UNIT PRICE OF THE WALK OR CURB.

⑦

HALL CT. S.E.



REPLACE EXISTING CURB WITH 25' OF CIRCULAR CURB (18" STRAIGHT CURB) - 15' RADIUS

FRANKLIN PLAYGROUND

REPLACE EXISTING APPROACH WITH APPROXIMATELY 20' OF 18" STRAIGHT CURB AND 60' SQ. FT. OF WALK

REPLACE 894 Sq. Ft. OF WALK - 20' OF STRAIGHT CURB - 25' CIRCULAR CURB

BECKMAN AVE. S.E.

FAY ST. S.E.

SIDE WALK IMPROVEMENTS

CITY OF MASSILLON, OHIO FEB. 1979