



- * All construction to be City of Massillon specifications and standards, the latest edition of the State of Ohio. Department of Transportation. Construction and Material Specifications and follow all OSHA regulations and requirements.
- * A preconstruction meeting shall be held with the contractor subcontractors, City Engineer, Safety & Service Director and the E.E.O. Director.
- * The E.E.O. Director shall receive the required weekly and monthly reports on this project.
- * When conflicts arise over the interpretation of notes and details in the drawings, the drawings take preference over general provisions and specifications that appear in the contracts.
- * The contractor is responsible for having all the utilities marked by their respected companies.

- * The cut in the existing pavement shall be extended 24" around the entire perimeter to subbase level to provide a shoulder on which the concrete slab base shall rest. This base shall be of 1:2:4, 6 bag mix, Portland cement concrete using high early strength cement and it must be cured for at least forty-eight hours. The pad must be 9" thick and reinforced with No. 6 wire mesh. 1.5" of 402 shall be placed followed by a 1.5" of 404 with a thickness of 1.5". All edges of the patch must be sealed with a roller and 705 Hot Applied Crack and Joint Sealer.
- * Concrete castings are to be placed as directed by the Inspector.

- ANCHOR BOLTS @ APPROXIMATELY
1'-6" ON CENTER

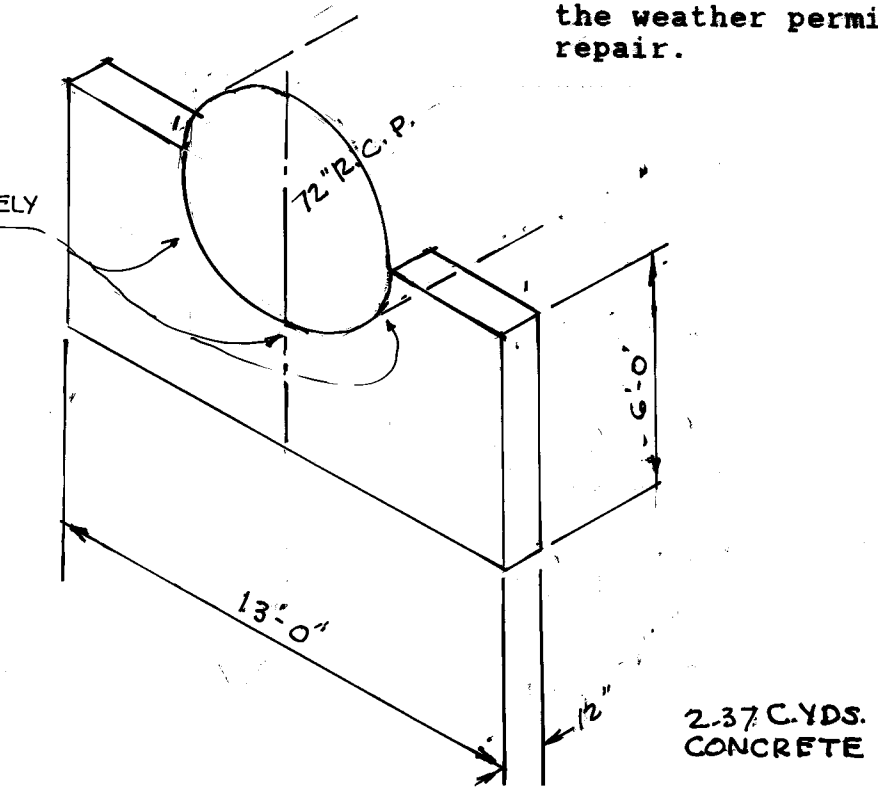


HALF
HEADWALL HW 4
SCALE 1"=5'

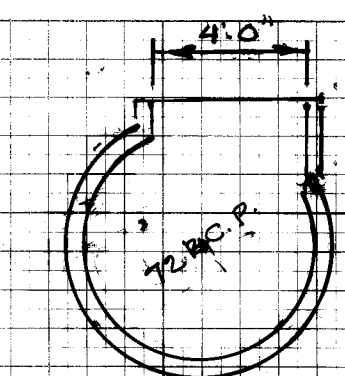


MANHOLE 72" R.C.P.
1'x5'

MANHOLES SHALL BE
REINFORCED CONCRETE
WITH "O" RINGS.

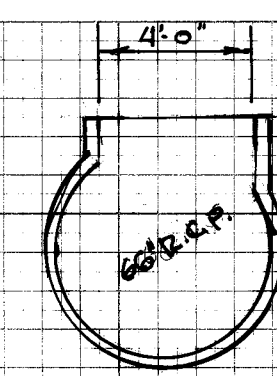

MANHOLE 66" R.C.P.
1'-5"

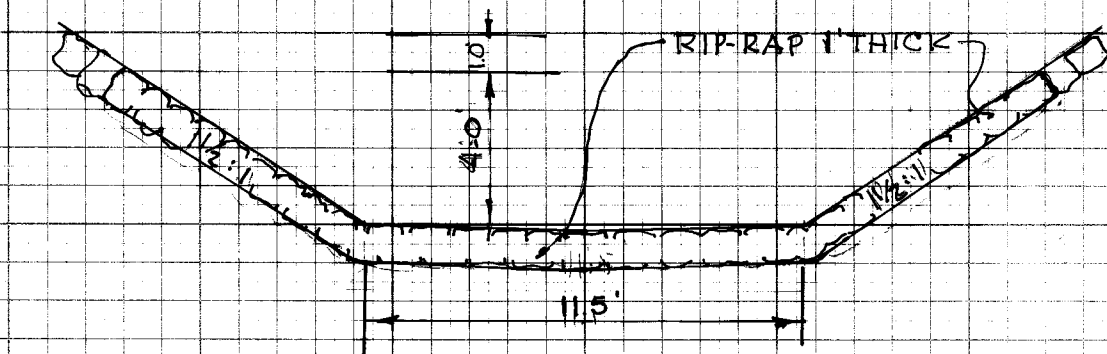

0430 TO 1400
DITCH

CITY OF MASSILLON, OHIO
ERIE ST., 1ST ST. N.E. S.R. 236
STORM SEWER

SCALE 1"=50' HOR 1"=5' VER.	DEPT. OF PUBLIC SERVICE ENGINEERING DIVISION
AUG. 1994 REVISED, NOV. 1994	ROBERT F. WAGONER, P.E. CITY ENGINEER

FILE NO. S.E. 623 ACC. NO. 3241

HIGHWAY FEDERAL AID SHEET
PLATE 4-SINGLE PLAN AND CROSS SECTION-FULL LINE
NATIONAL PRINTFAST
 PRINTED IN U.S.A.