


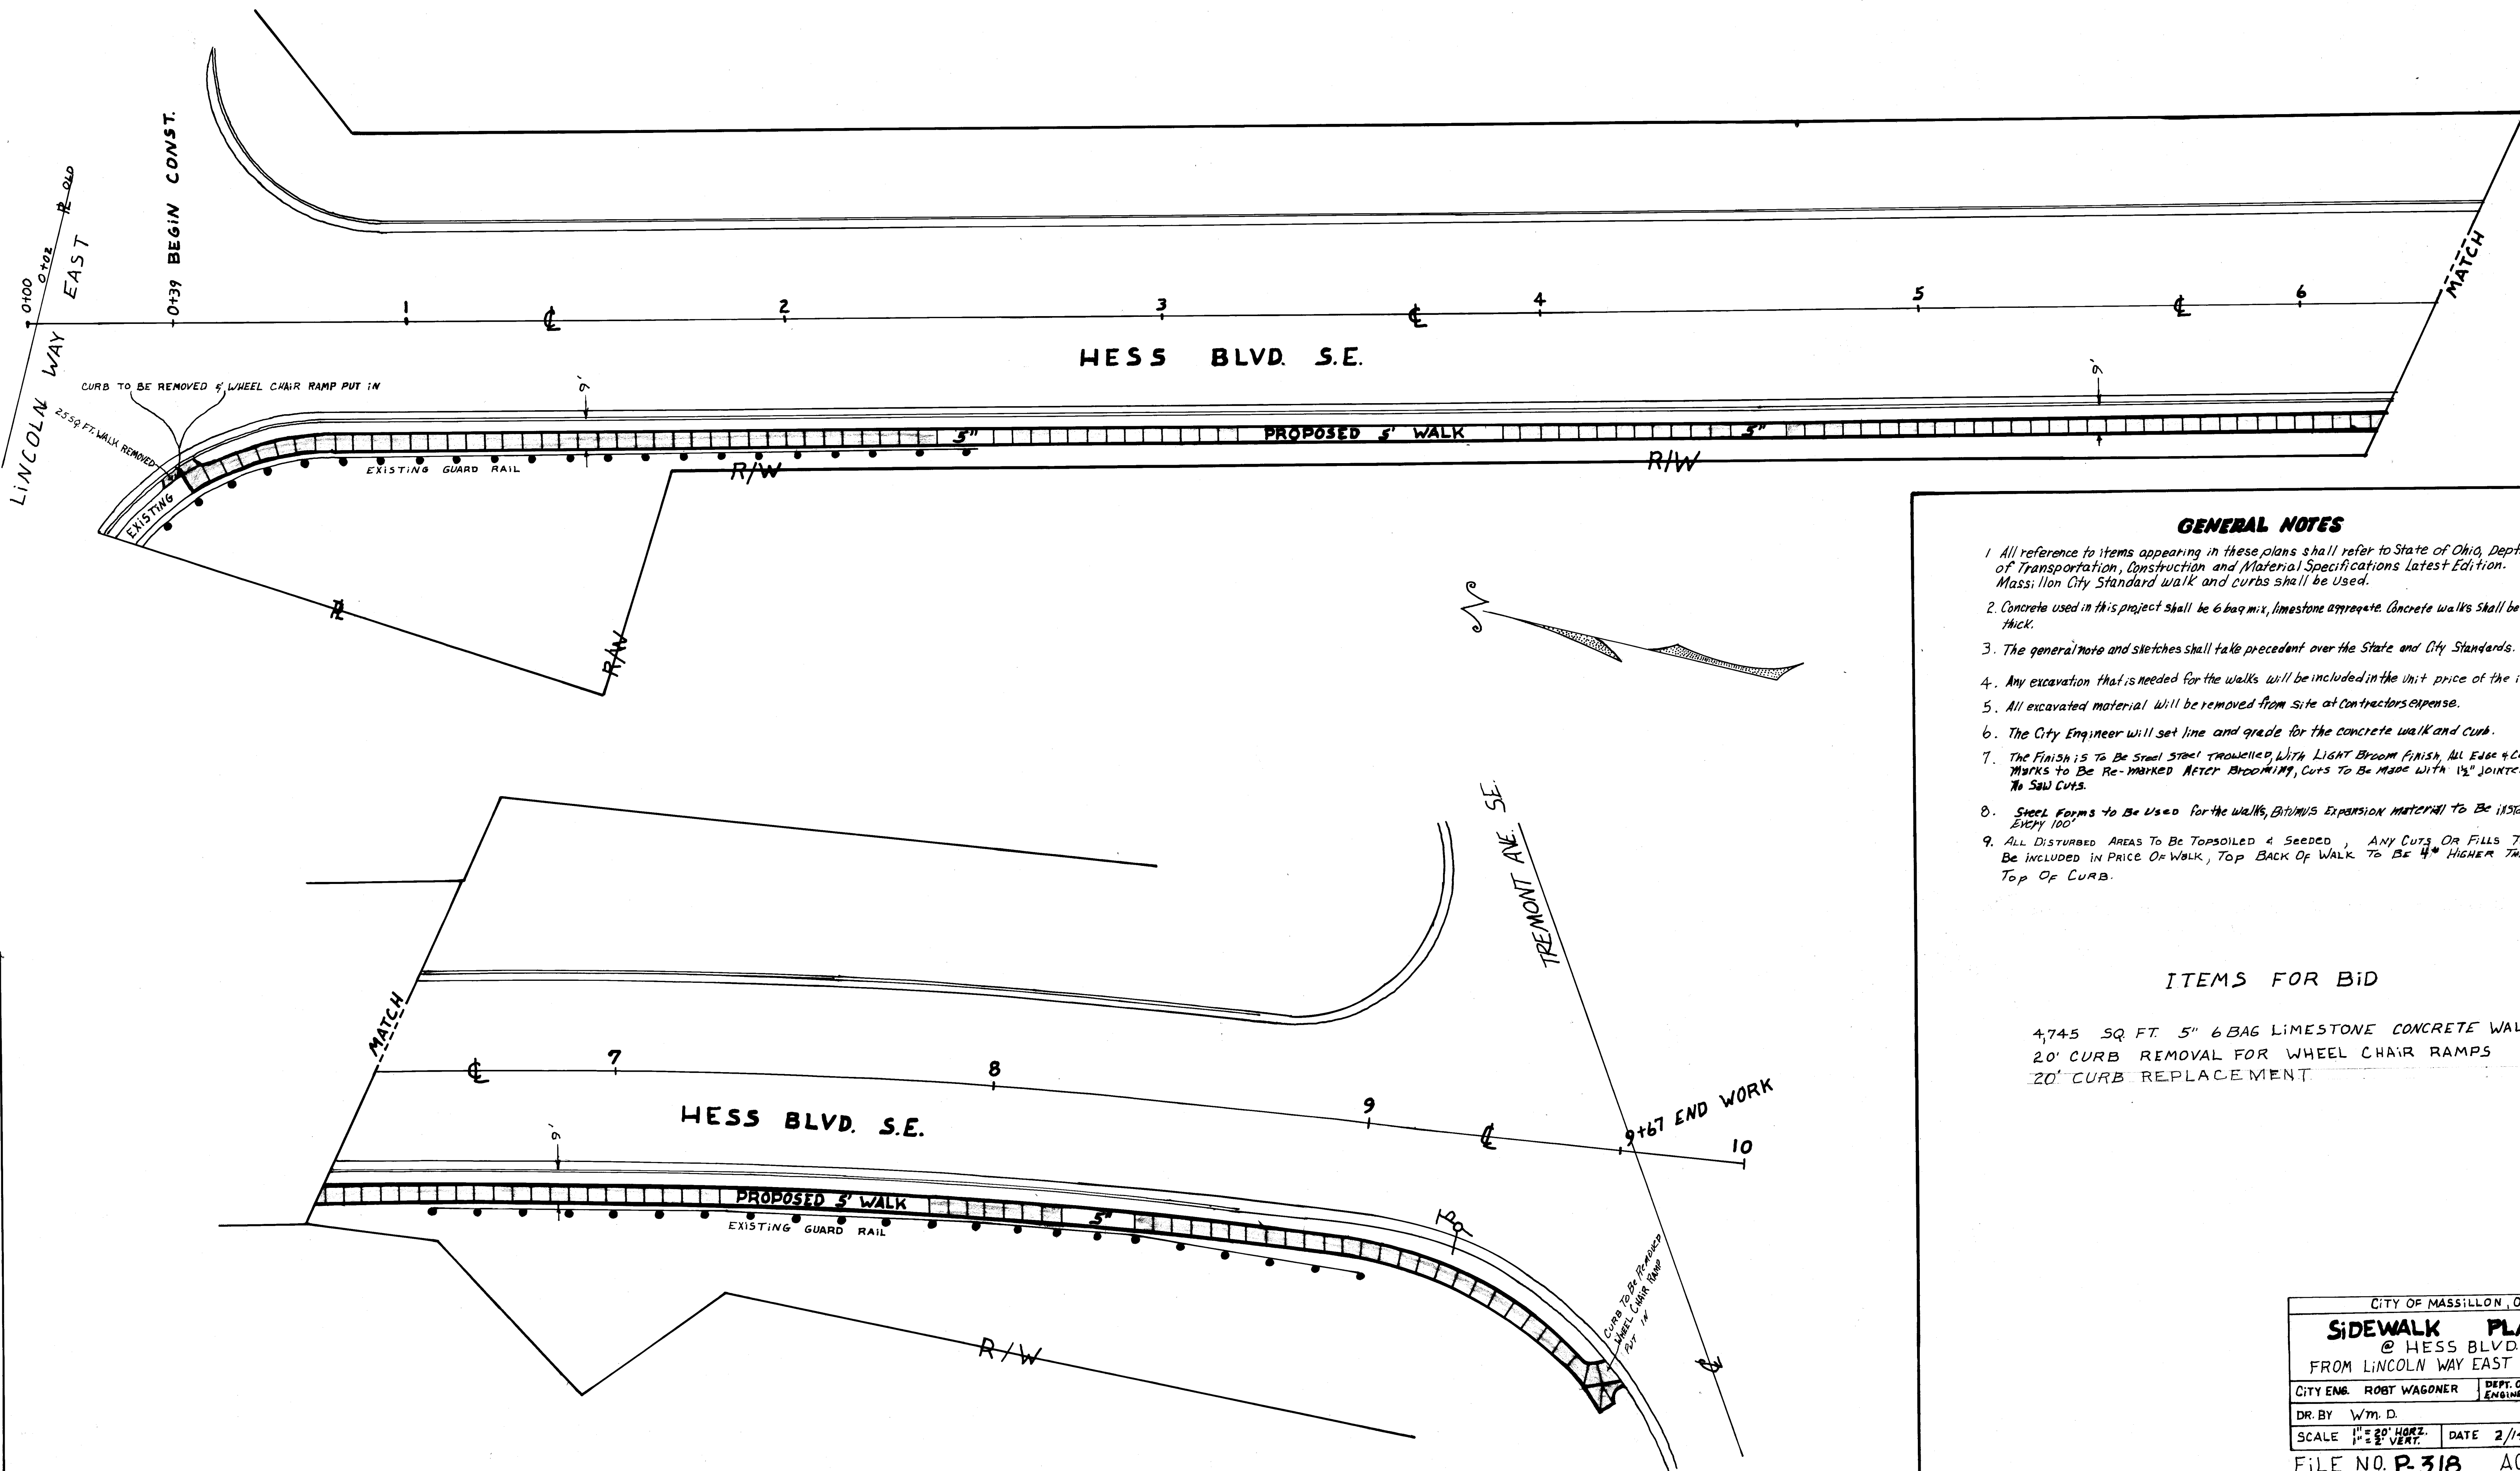

GENERAL NOTES

1. All reference to items appearing in these plans shall refer to State of Ohio, Dept. of Transportation, Construction and Material Specifications Latest Edition. Massillon City Standard walk and curbs shall be used.
2. Concrete used in this project shall be 6 bag mix, limestone aggregate. Concrete walks shall be 5" thick.
3. The general note and sketches shall take precedent over the State and City Standards.
4. Any excavation that is needed for the walks will be included in the unit price of the item.
5. All excavated material will be removed from site at Contractors expense.
6. The City Engineer will set line and grade for the concrete walk and curb.
7. The Finish is to be Steel Steel Trowelled, With Light Broom Finish, All Edge & Cut Marks to be Re-marked After Brooming, Cuts to be made with 1/2" jointer, No Saw Cuts.
8. Steel Forms to be Used for the walks, Bitumix Expansion Material to be installed every 100'.
9. ALL DISTURBED AREAS TO be TOPSOILED & Seeded, ANY CUTS OR FILLS TO be INCLUDED IN PRICE OF WALK, TOP BACK OF WALK TO be 1/4" HIGHER THAN TOP OF CURB.

ITEMS FOR BID

4,745 SQ. FT. 5" 6 BAG LIMESTONE CONCRETE WALKS
 20' CURB REMOVAL FOR WHEEL CHAIR RAMPS
 20' CURB REPLACEMENT

CITY OF MASSILLON, OHIO			
SIDEWALK PLACEMENT			
@ HESS BLVD.			
FROM LINCOLN WAY EAST TO TREMONT S.E.			
CITY ENG. ROBT WAGONER		DEPT. OF PUBLIC SERVICE ENGINEERING DIVISION	
DR. BY W.M.D.		SHEET	
SCALE 1" = 20' HORIZ. 1" = 2' VERT.		DATE 2/14/85	
FILE NO. P-318		ACC. NO. 3022	