
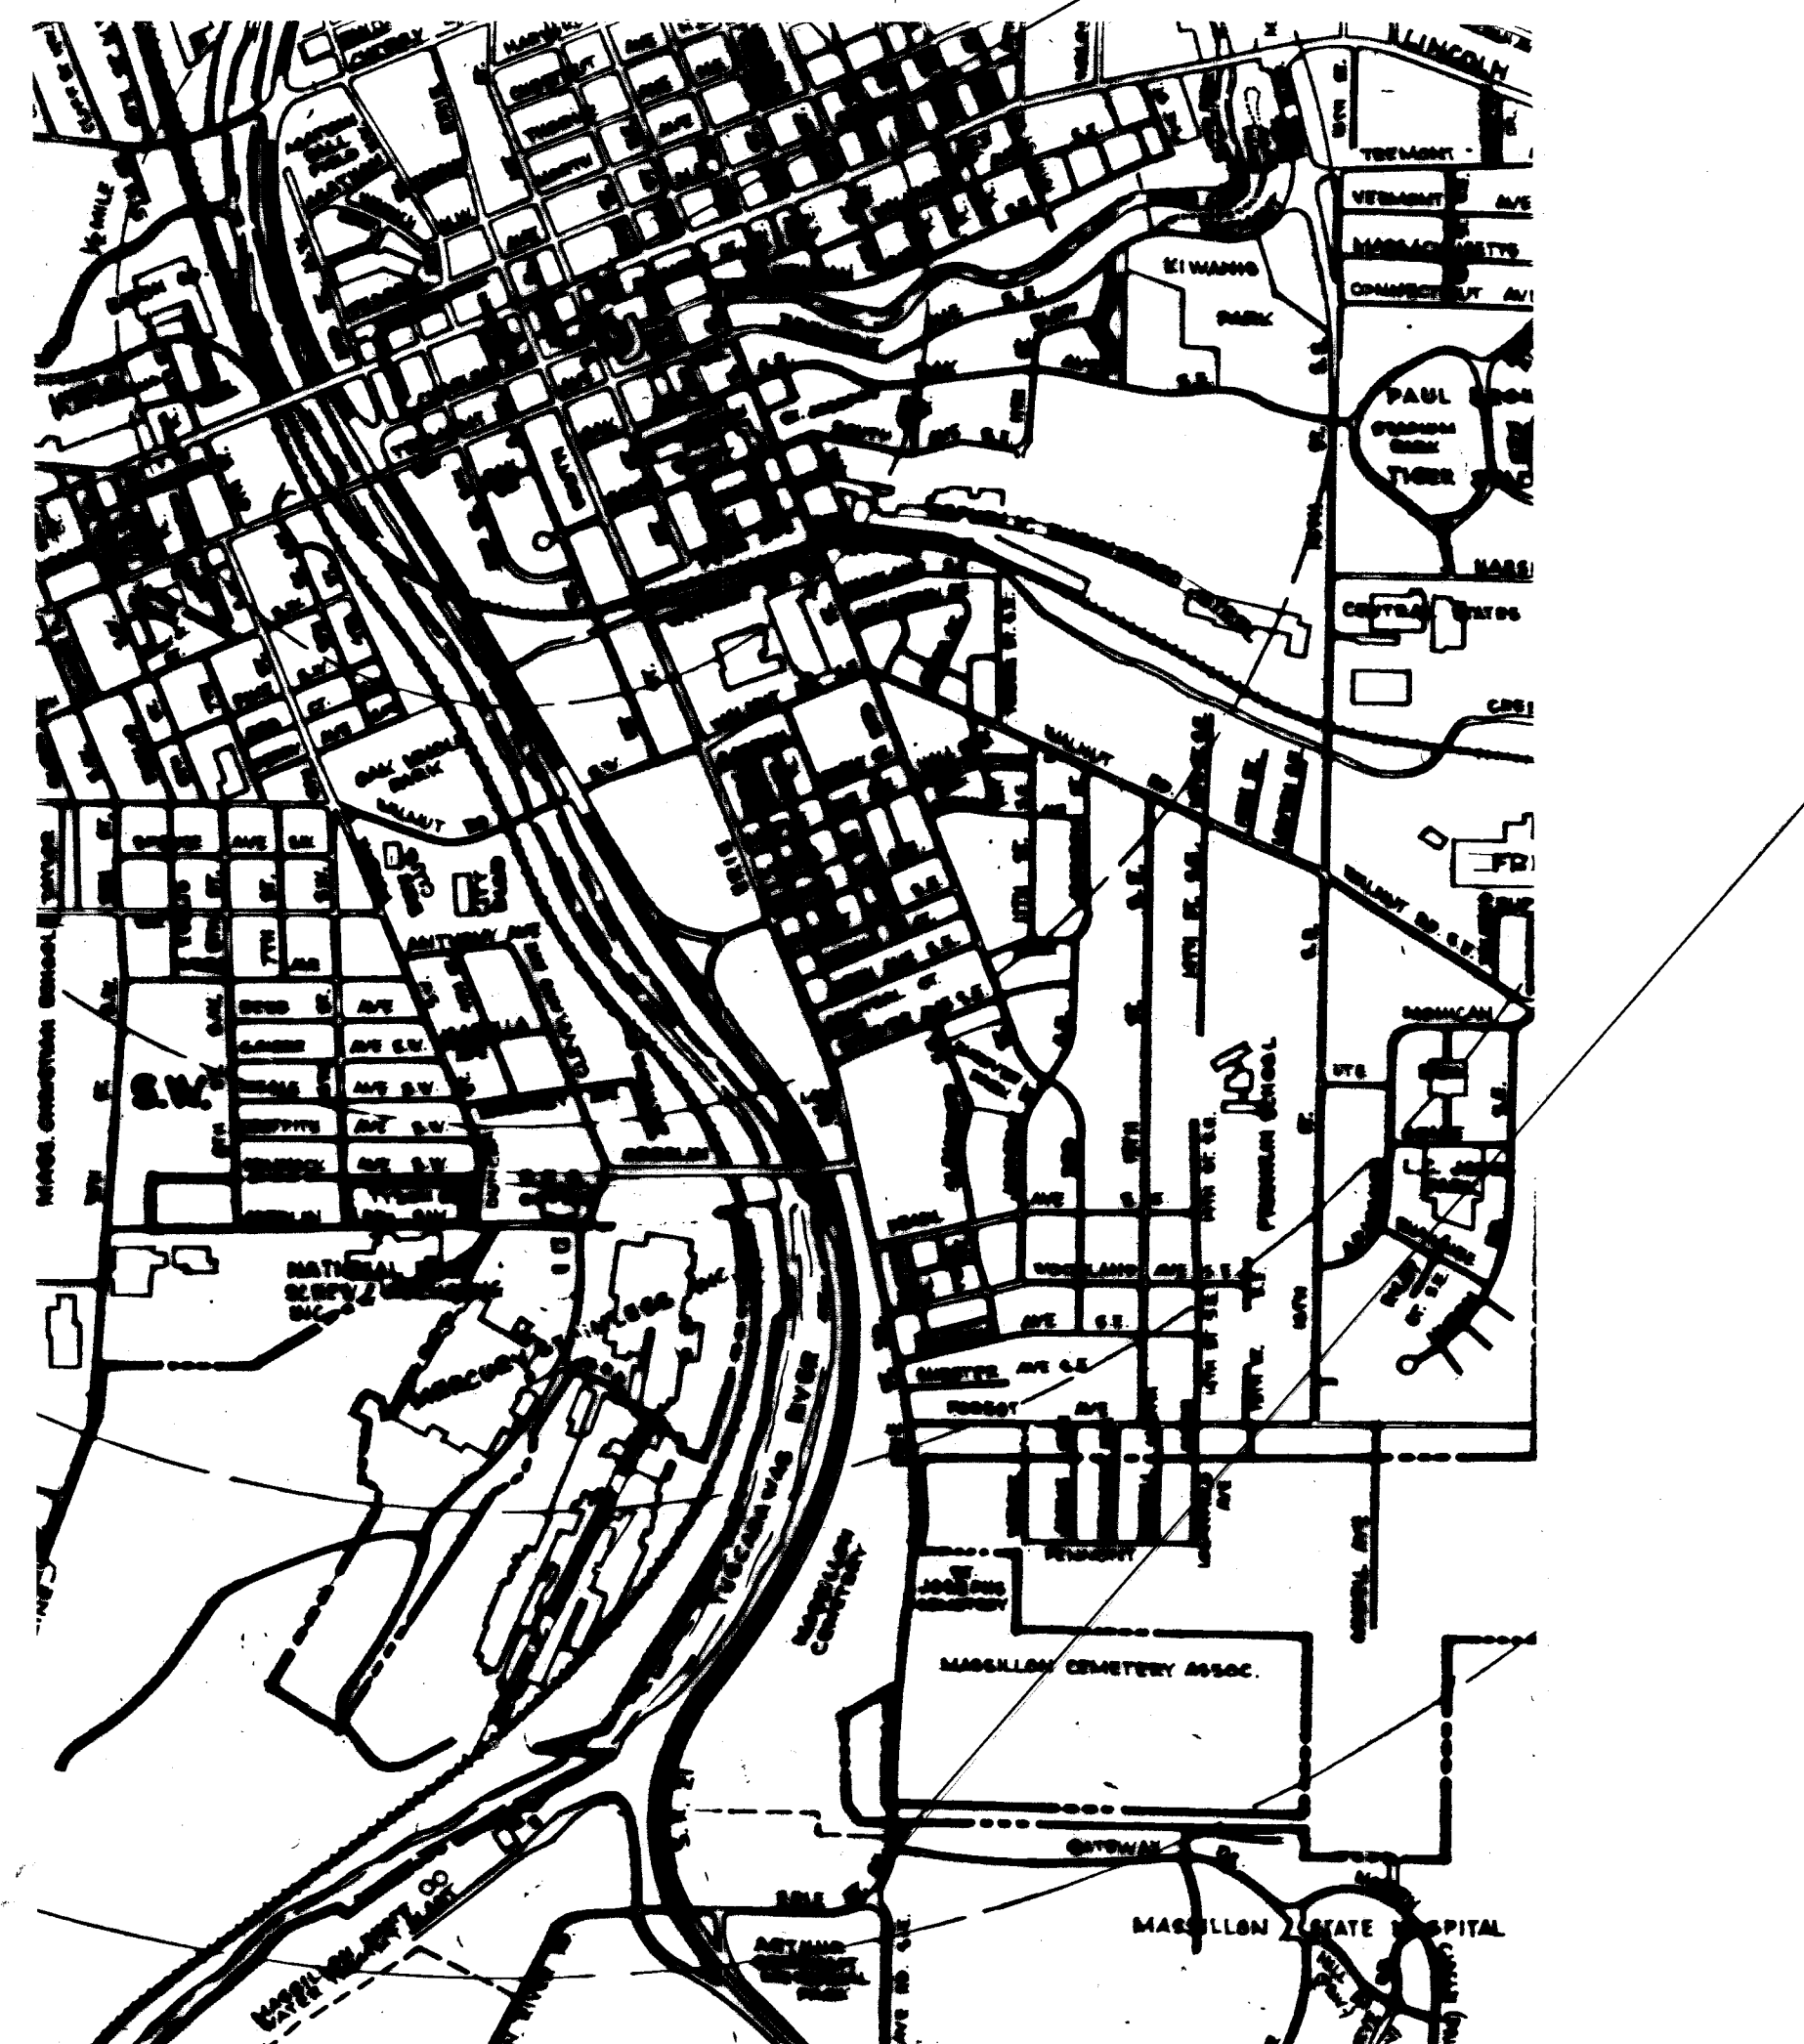


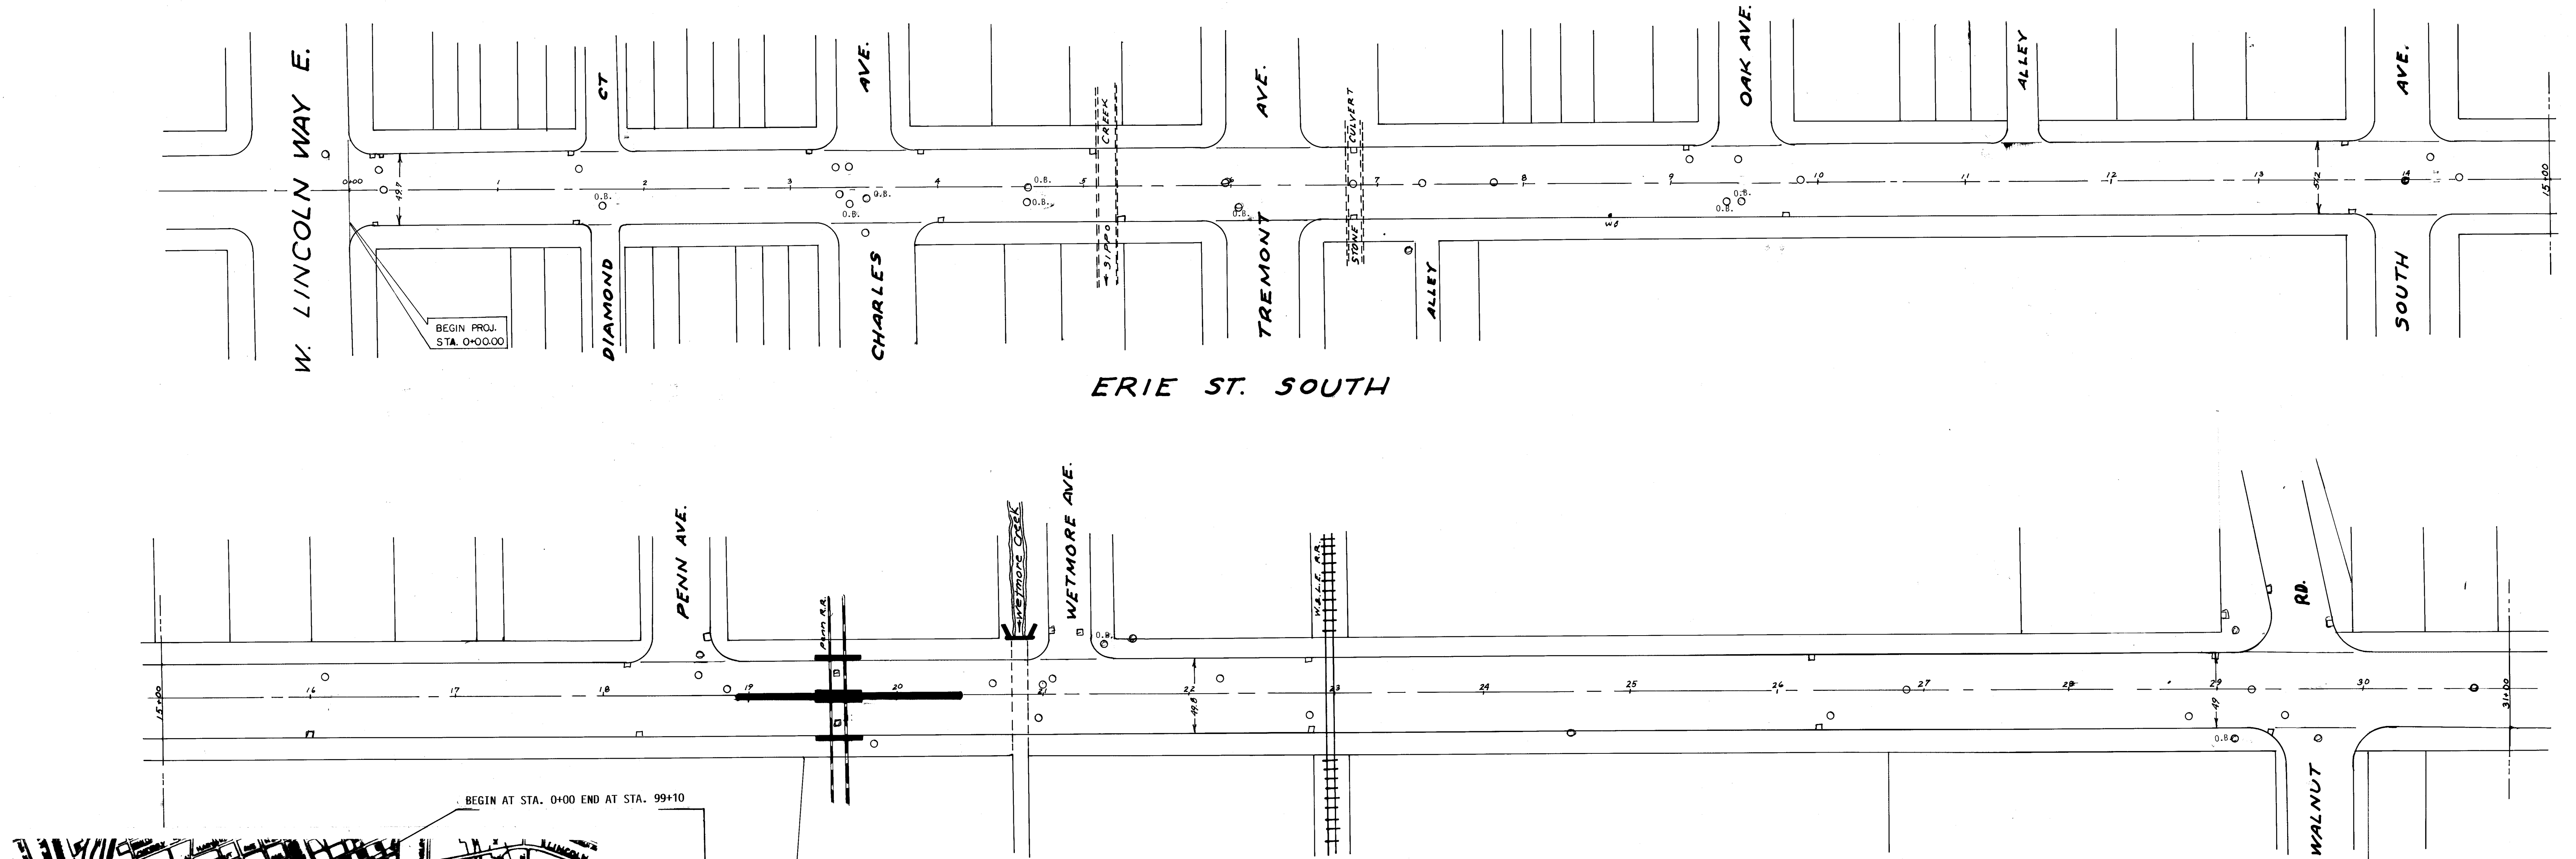


GENERAL NOTES


- All construction to be City of Massillon specifications and standards, and the latest edition of the State of Ohio, Dept. of Transportation, construction, and material specifications.
- A preconstruction meeting shall be held with the contractor, subcontractors, City Engineer, and E.E.O. Director.
- The E.E.O. Director shall receive the required weekly and monthly reports on this project.
- When conflicts arise over the interpretation of notes and details in the drawings, the drawings take preference over general provisions and specifications that appear in the contract.
- The contractor shall maintain traffic control on all the streets per Item 614, Maintaining Traffic, at all times; he shall post streets for "No Parking" the day before paving will begin.
- The contractor may use adjusting rings, but type must be approved by City Engineer.

ITEM SPECIAL - PAVEMENT PLANING

- Bituminous without heating the contractor will plane off existing asphalt surface, as shown on the typical sections to the limits shown on the plans.
- The planer used will be capable of planing directly adjacent to a curb. The contractor will use reasonable care not to damage existing curbing; it is the responsibility of the contractor to repair or replace any curbing damage as a result of this work at his expense, to keep the work areas clear of debris and grindings, to make the planed surface available to traffic as soon as possible after planing operations are complete, and to clean all pavement surfaces immediately prior to resurfacing. The asphalt material that is removed will become the property of the contractor and shall be disposed of in accordance with Section 203.05.
- Payment for this work will be made a unit price bid per square yard of Item Special - Pavement and Planing, and shall constitute full compensation for furnishing all materials and equipment necessary to place the existing pavement as shown on the plans.

CITY OF MASSILLON, OHIO	
RESURFACING	
ERIE ST. SOUTH	
DR BY S. HAMIT	DEPT. OF PUBLIC SERVICE
CITY ENG. ROBERT WAGONER	ENGINEERING DIVISION
SCALE 1" = 50'	DATE JUNE 20, 1990
1	3

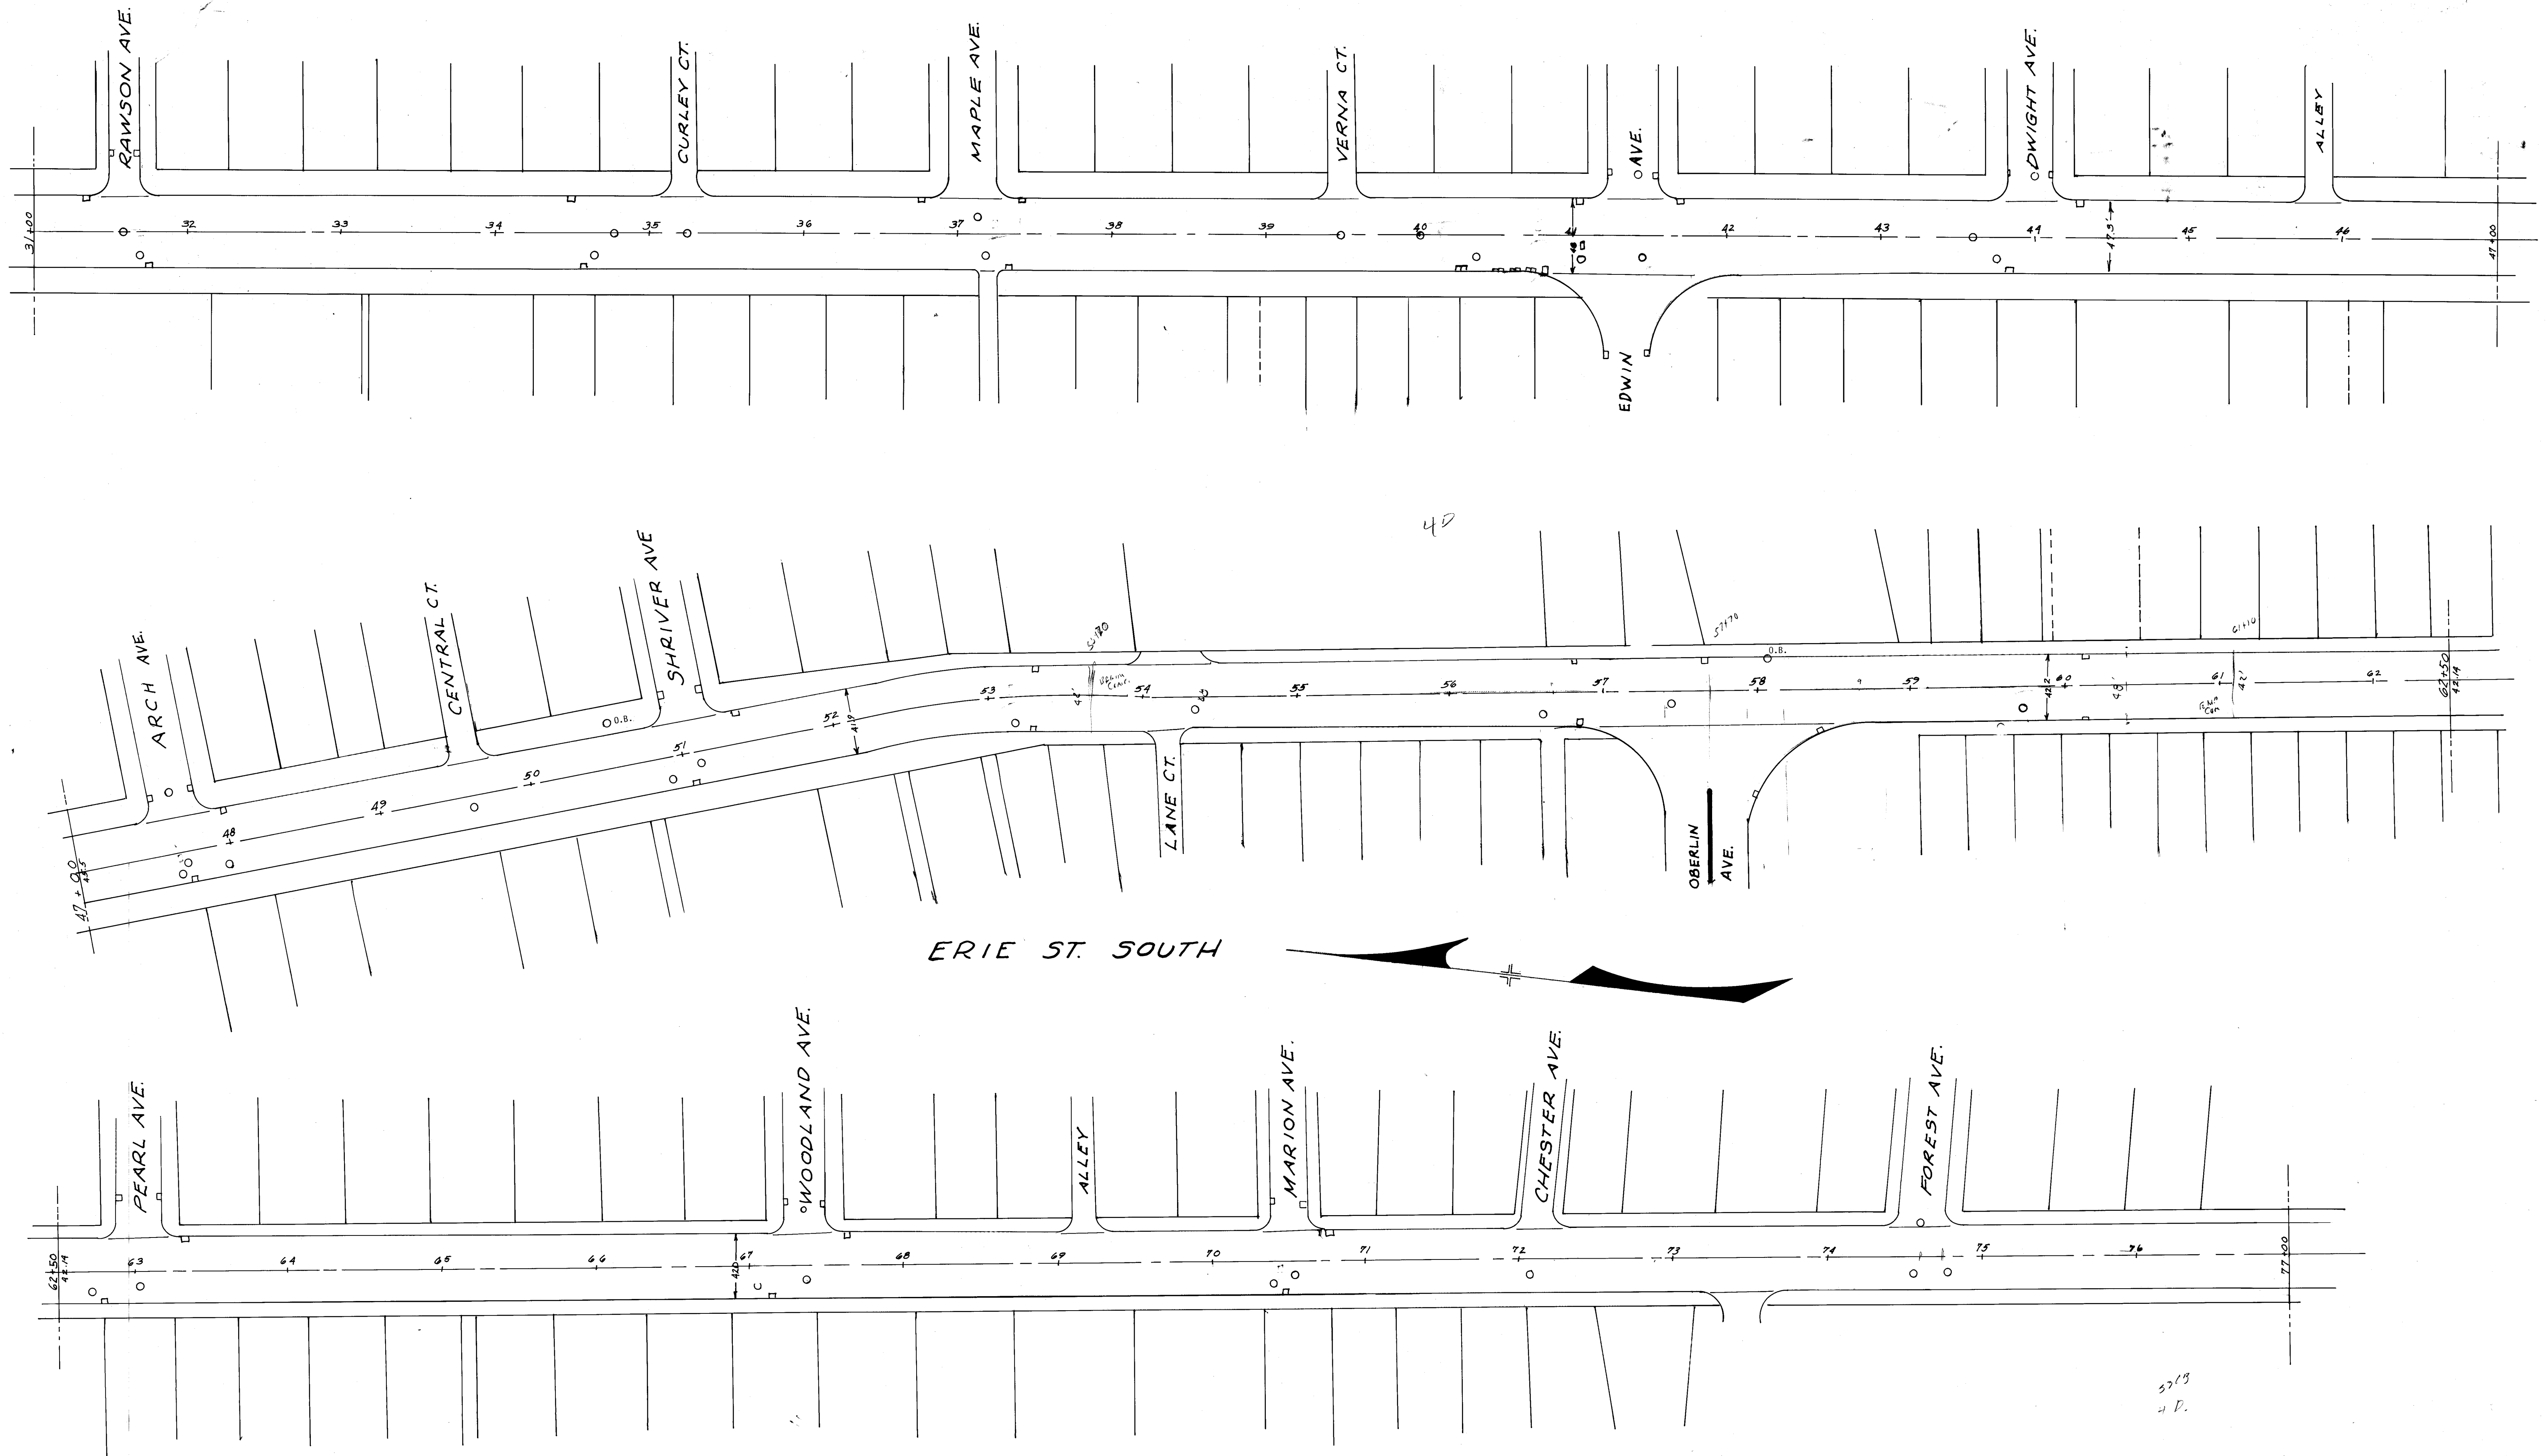

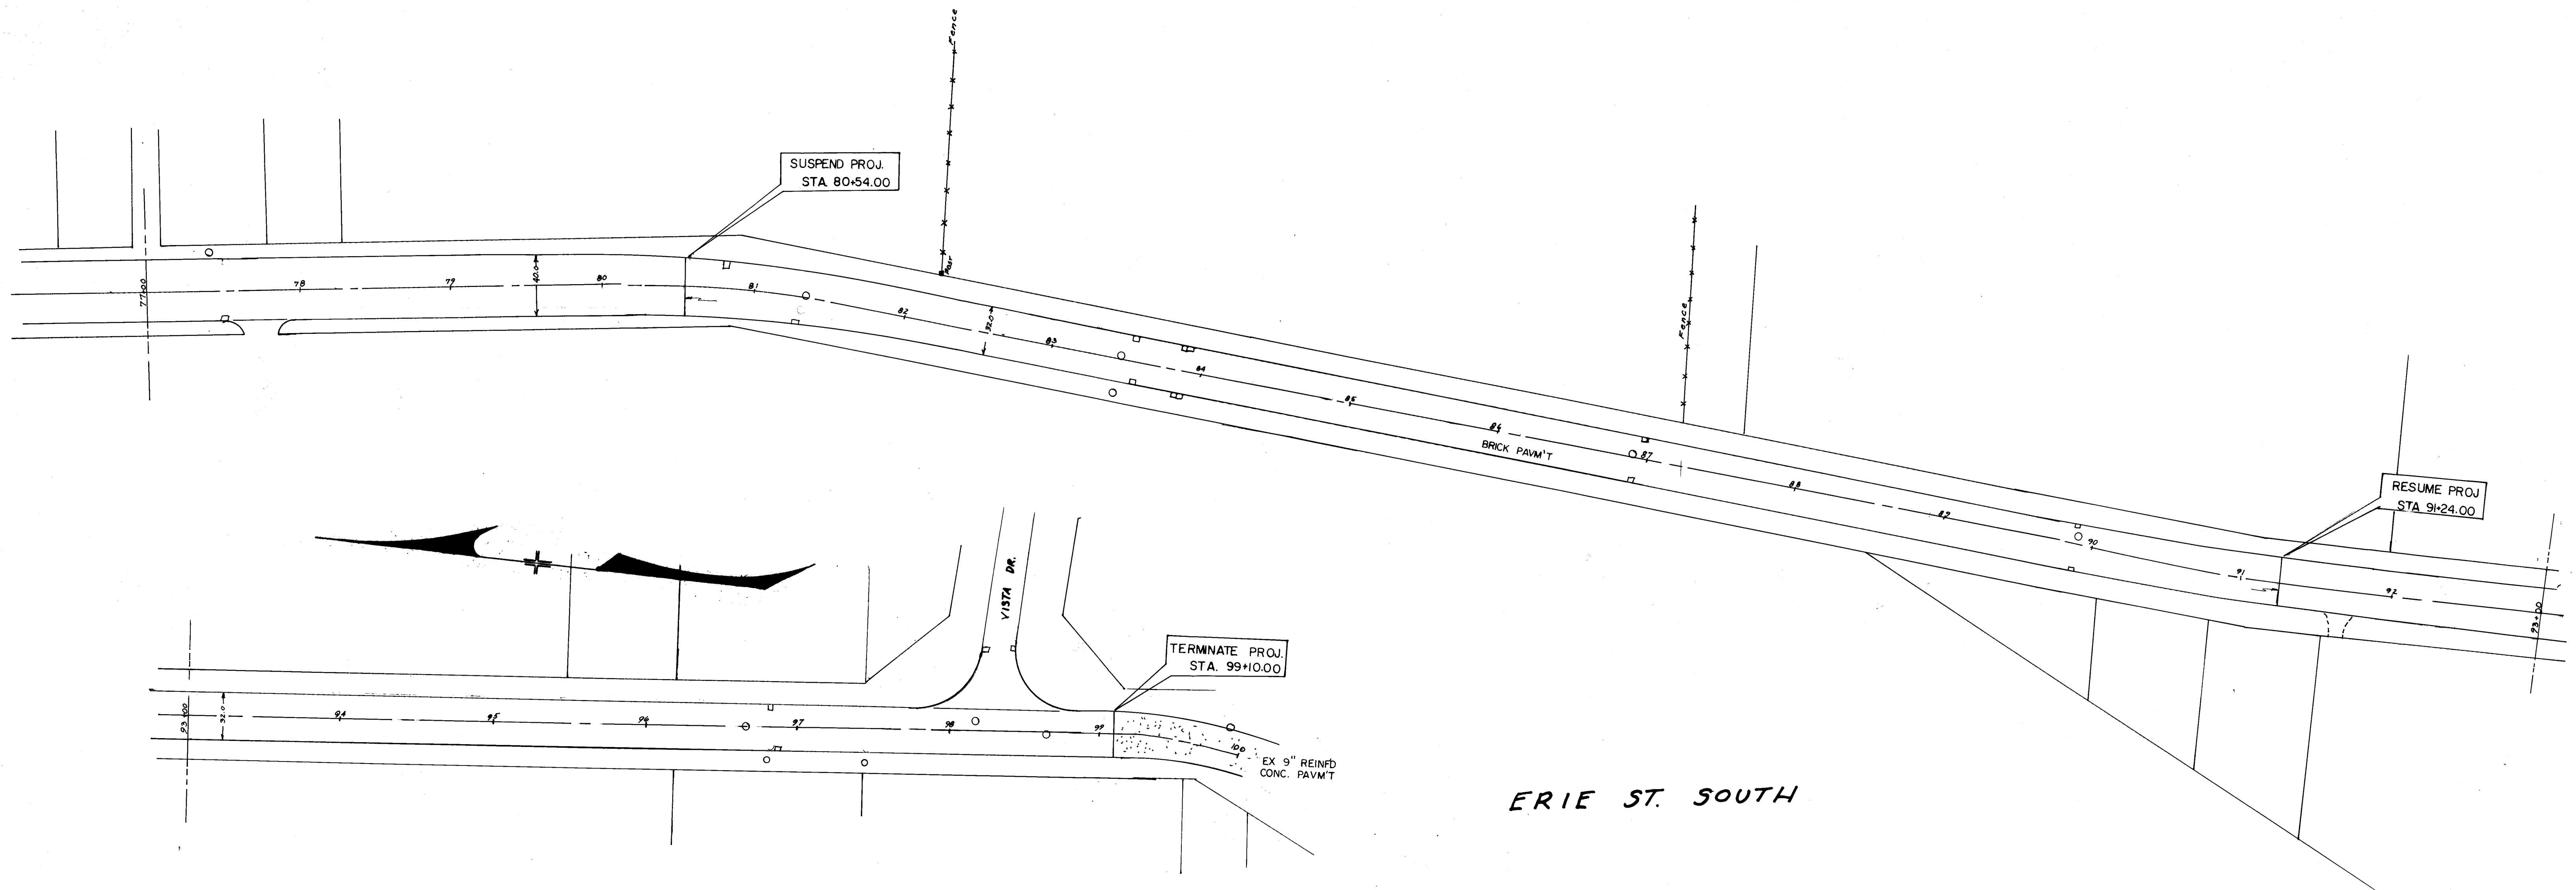

ERIE ST. SOUTH

