
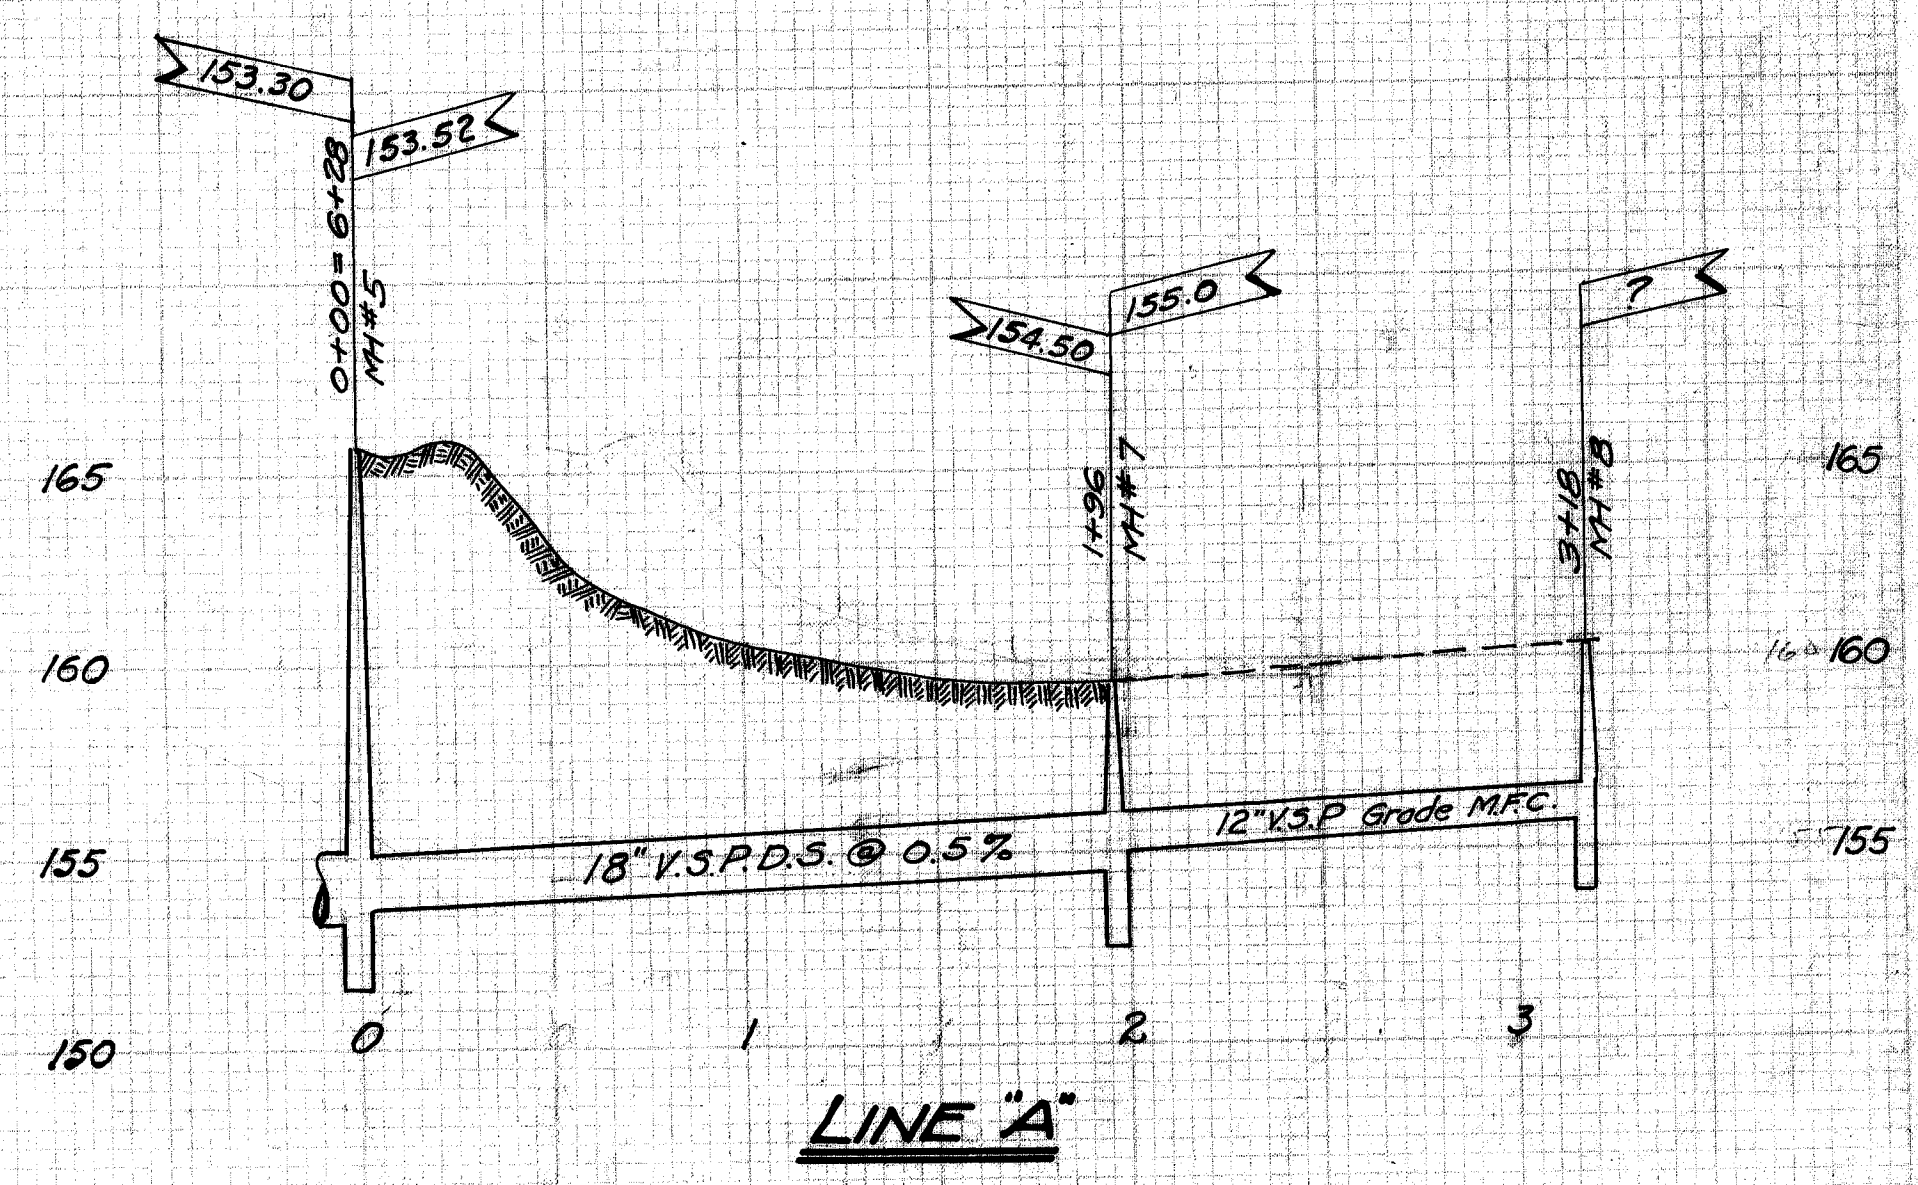
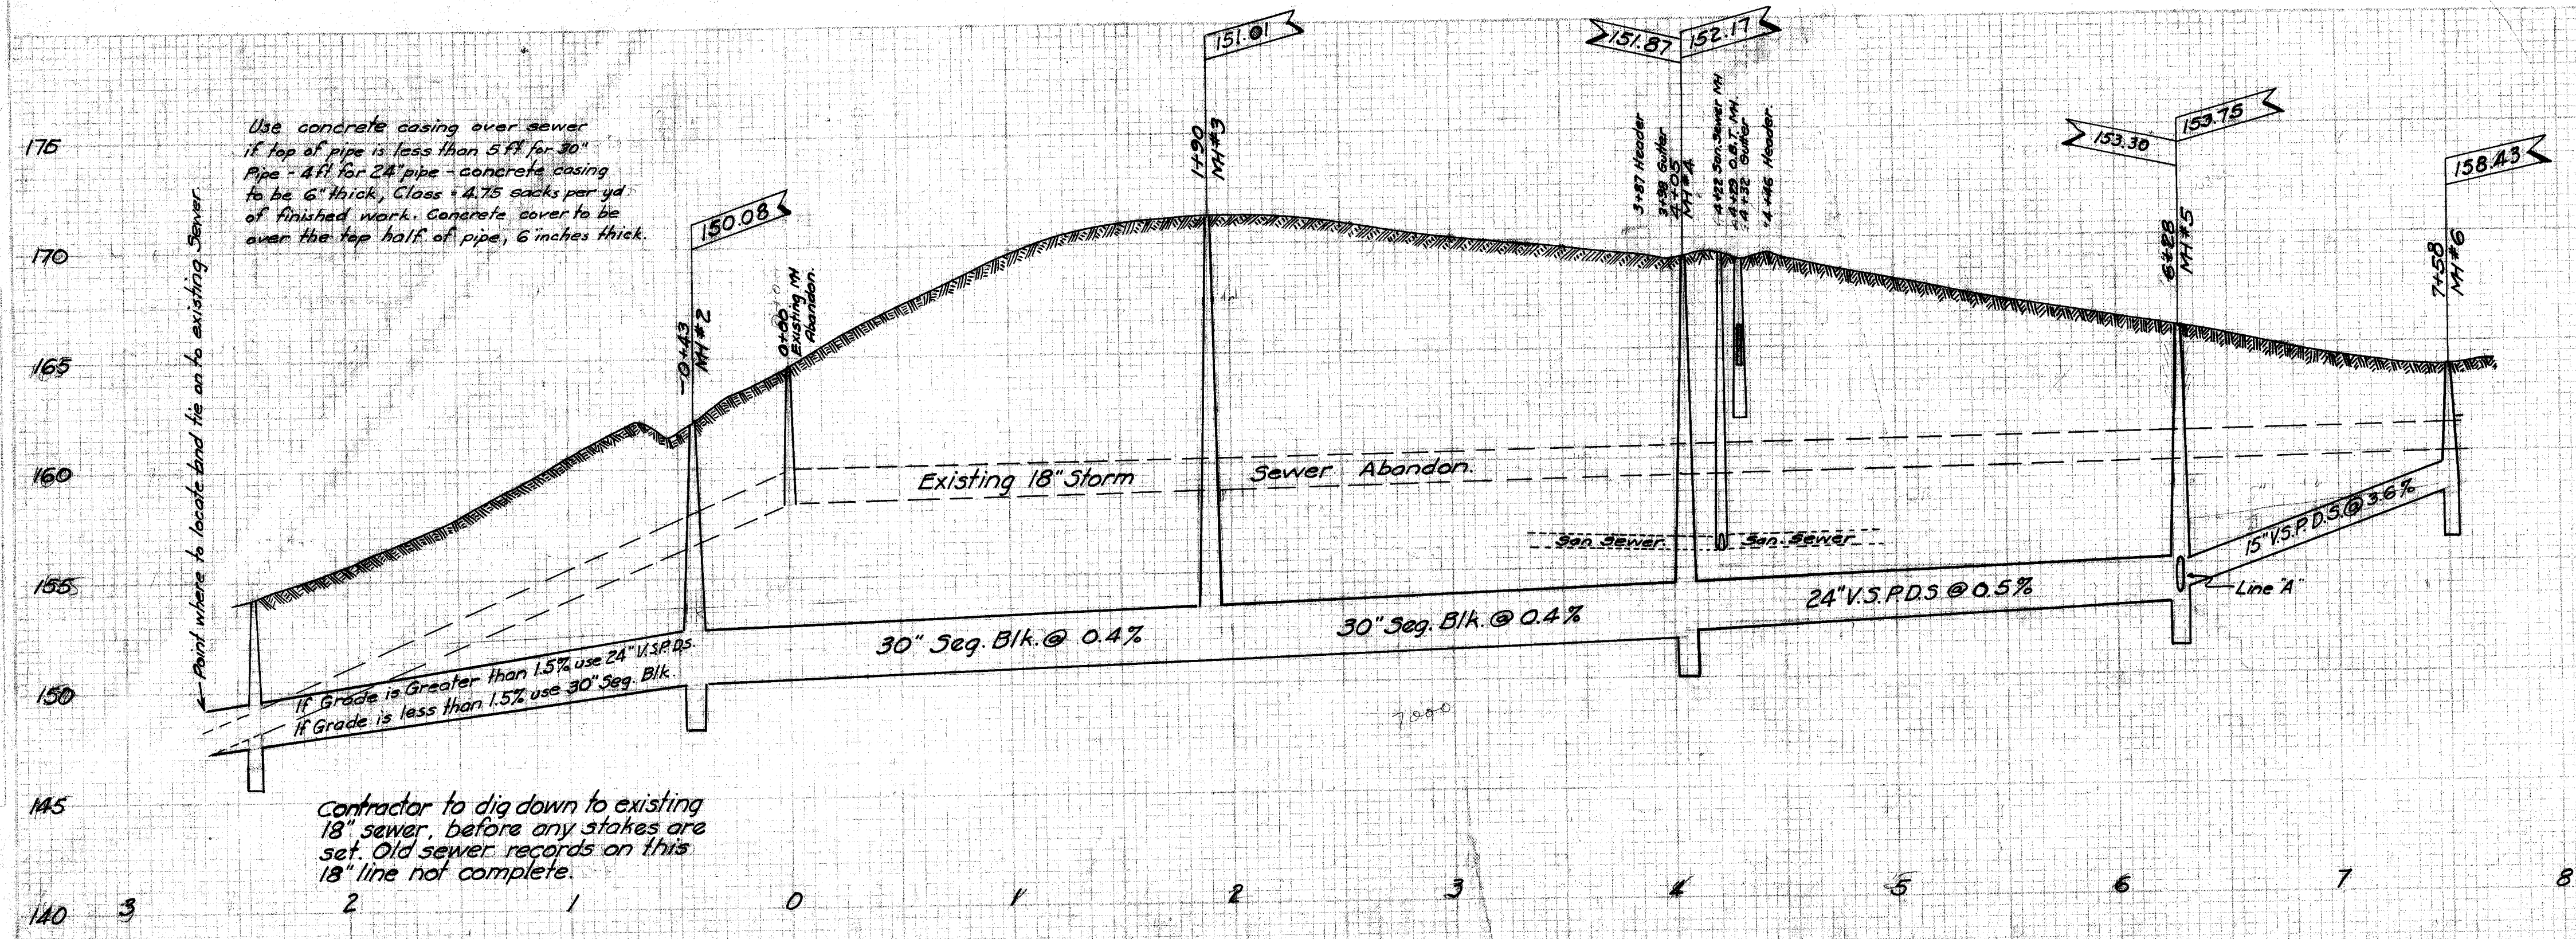
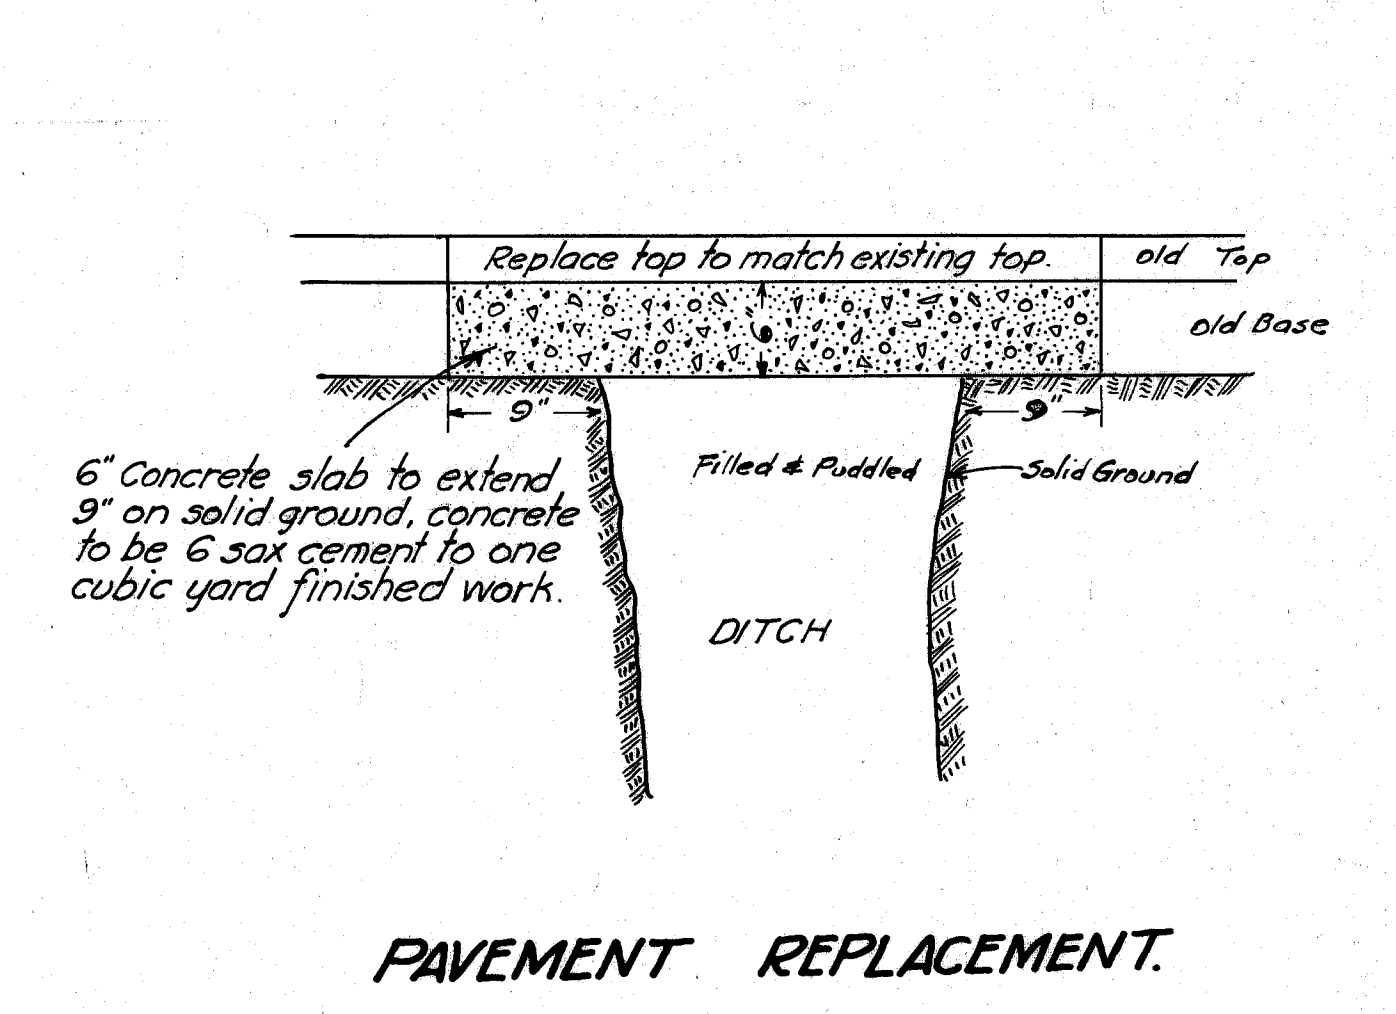


PLAN
 1. NOTE: CONTRACTOR TO RELAY BRICK WALK & STONE GUTTER. PRICE TO BE INCLUDED IN PER FT. OF PIPE.
 2. NOTE: CONTRACTOR TO RELAY BRICK WALK & STONE GUTTER. PRICE TO BE INCLUDED IN PER FT. OF PIPE.
 3. NOTE: CONTRACTOR TO RELAY BRICK WALK & STONE GUTTER. PRICE TO BE INCLUDED IN PER FT. OF PIPE.

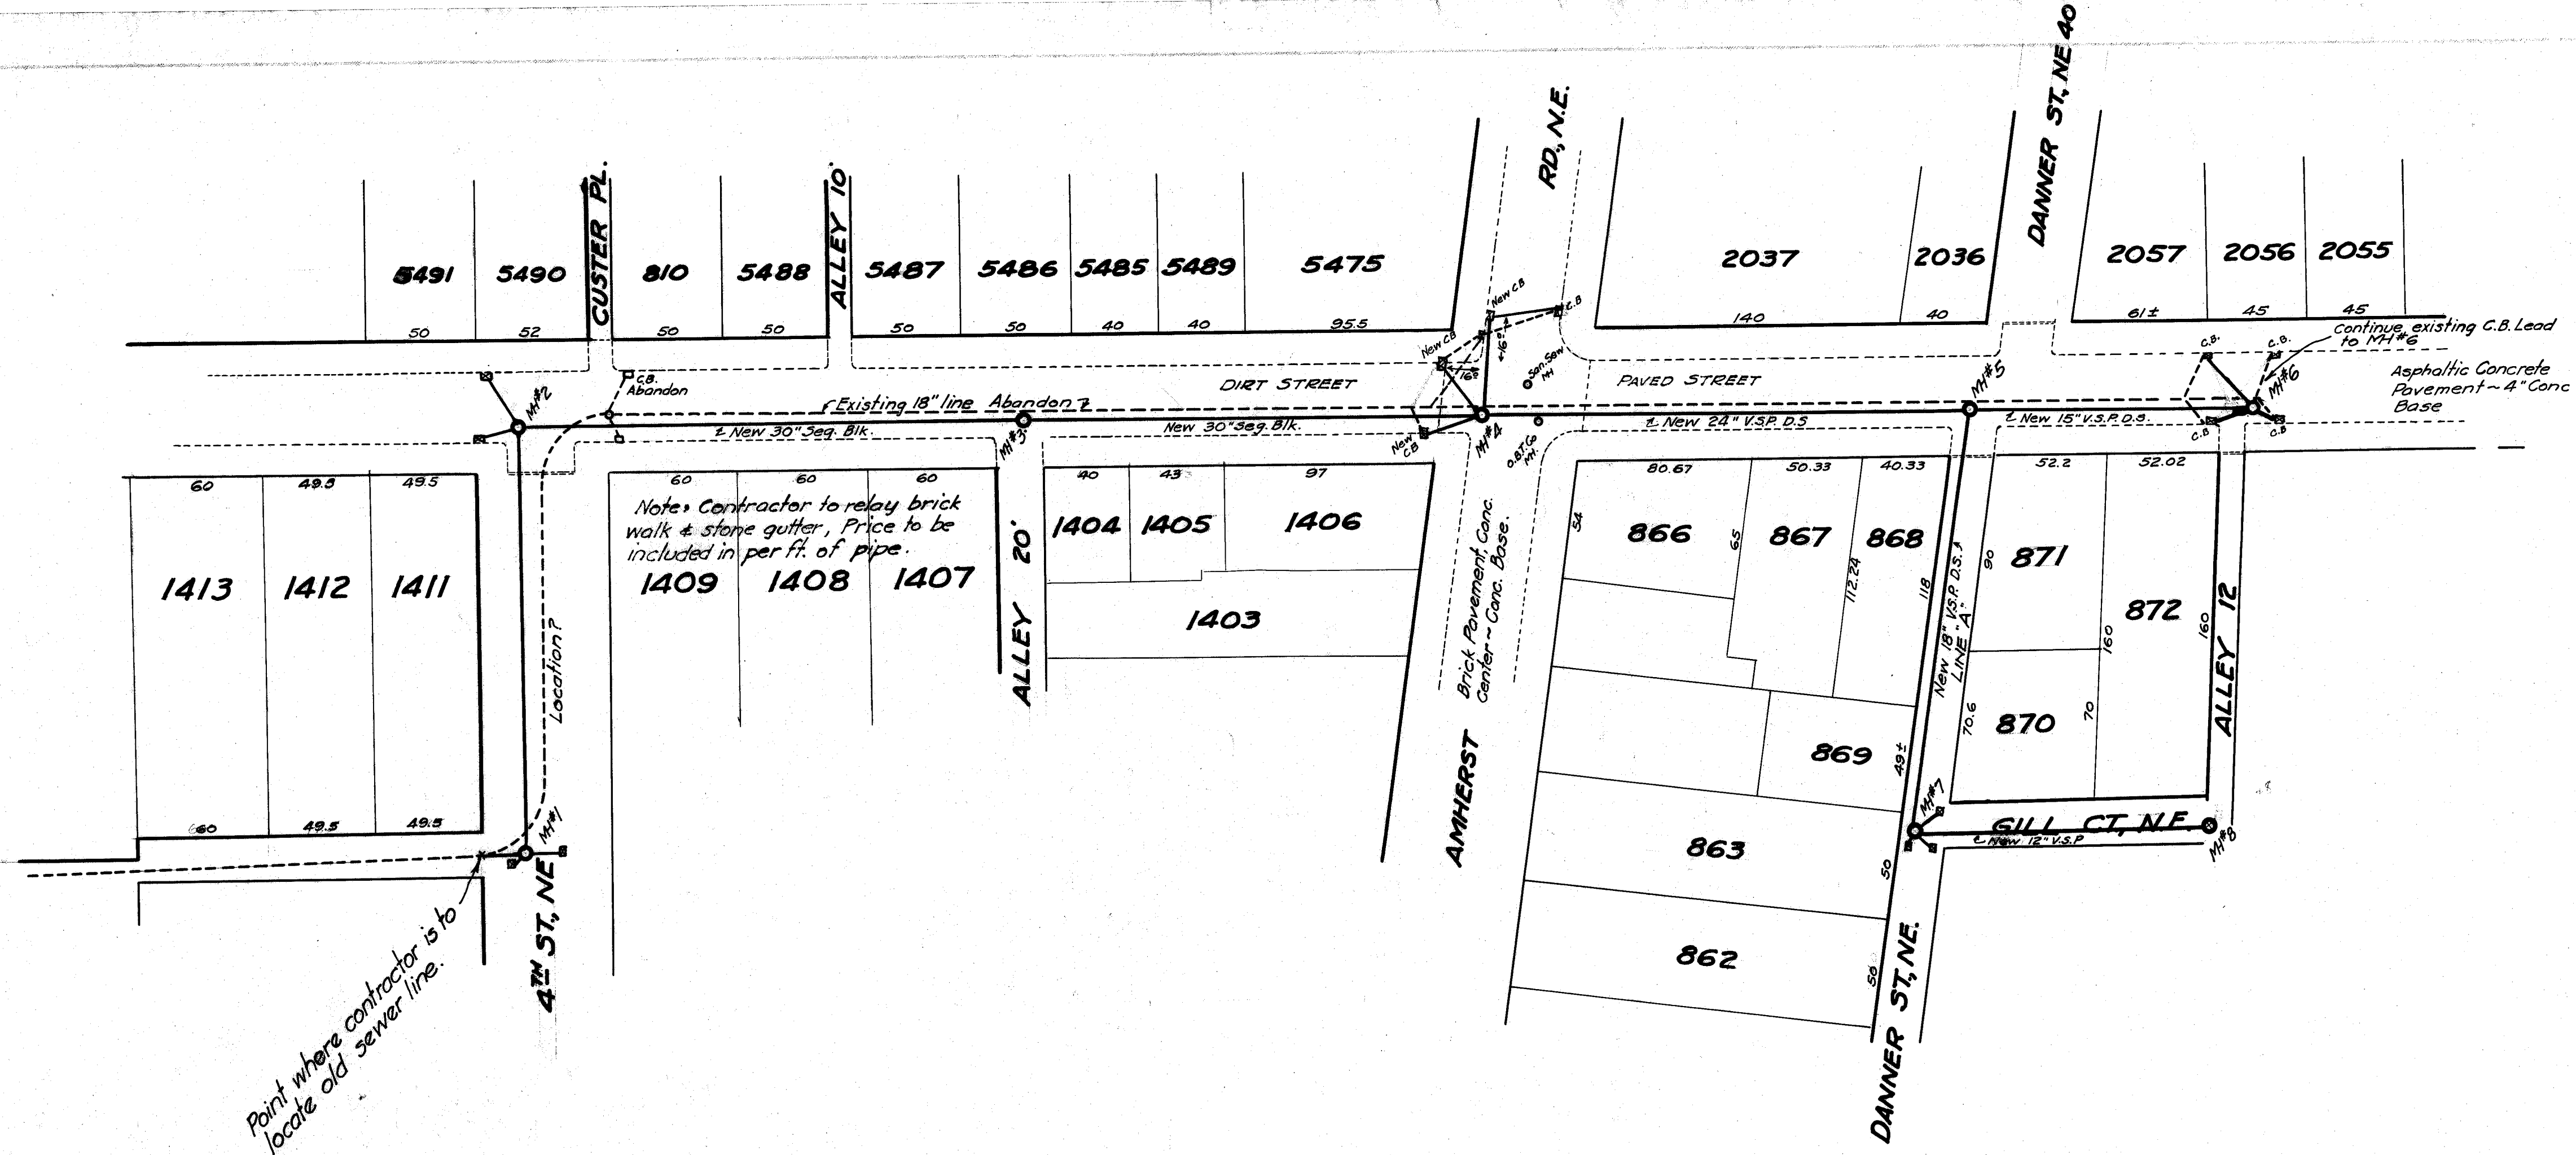

Contractor to dig down to existing 18" sewer, before any stakes are set. Old sewer records on this 18" line not complete.

Field Party to make grade from MH#1 to MH#2 to meet Elev 150.08 at MH#2, be sure to figure out the grade so as to determine the size of pipe to use.

BENCH MARKS
 MH#257 - SE Cor. State Ave & 4th St NE, Elev. 167.05
 MH#2 - North side State of Whittier, Elev. 167.30

CITY OF MASSILLON, OHIO	
STATE & DANNEN ST., NE.	
RELIEF STORM SEWER.	
APPROVED:	DEPT. OF PUBLIC SERVICE
CITY ENGINEER	ENGINEERING DIVISION
By E.C. Wallace, June 12th 1933	Scale 1" = 10' Ver. 1" = 30' Hor.
FILE NO. SE-871	ACC. NO. 1236