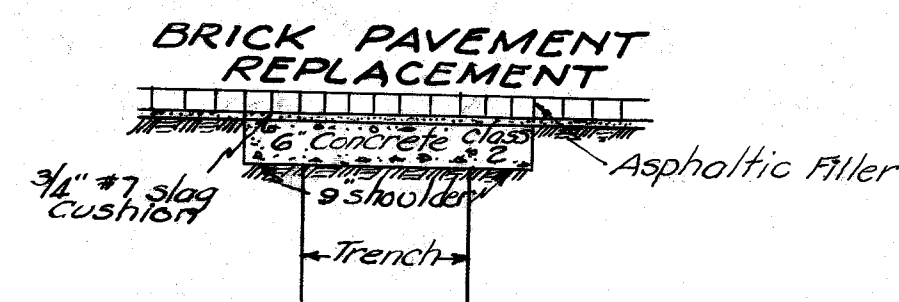
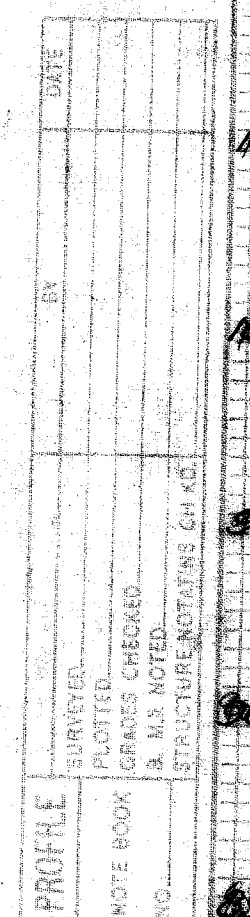


- 1. Laterals-** All building laterals now connected to existing Sanitary Sewer on Penn Ave. S.E. 34°31.5E between Penn and Sippo Ave. and Sippo Ave. S.E. to be reconnected to new sewer using 8"x6" wyes, 6" pipe and increasers where necessary. The Engineer will determine the length of laterals to be relaid. Laterals to be bid per lineal foot, including excavation and back fill.
- 2. Sheeting-** Tight sheeting shall be required on main sewer from Sta. 1+60 to Sta. 15+60. Sheeting to be left in trench as directed by the
- CONTRACTORS NOTE:**
- Engineer, such sheeting left in place to be paid for under item
- 3. Back fill-** Backfilling to be machine tamped in trenches before pulling sheeting and puddled after trench is completely filled.
- 4. Sidewalk Replacement-** All sidewalk removed shall be relaid with 4" concrete class I. Driveways to be 6" concrete class I. Paid for under item
- 5. Pavement Replacement-** As shown on plans. Paid for under item
- 6. Curbing-** All curb removed to be replaced by Contractor at own expense except new curb where ordered by the Engineer.

-BENCH MARKS-

HYD	ERIE ST SO. of WETMORE	Elev	93.30
HYD	PENN AVE at ALBRIGHT	Elev	106.25
HYD	SIPPO AVE at 4TH ST SE	Elev	107.06

CITY OF MASSILLON, OHIO.
PENN AVE. S.E.
SANITARY SEWER
 FROM ERIE ST. SO. - EASTERLY TO 4TH ST. SE.
 Approved _____
 CITY ENGINEER
 DEPT. PUBLIC SERVICE
 ENGINEERING DIVISION
 Dr. by H. Piper
 Ch. by _____ Jan. 7, 1943
 Scale: Hor. as shown N.B. 160
 Ver. 1"=5' P.24
FILE NO. SE 438 ACC. NO. 1619