





AMHERST RD. N.E. 60° SANITARY SEWER 6' EAST OF CENTER LINE

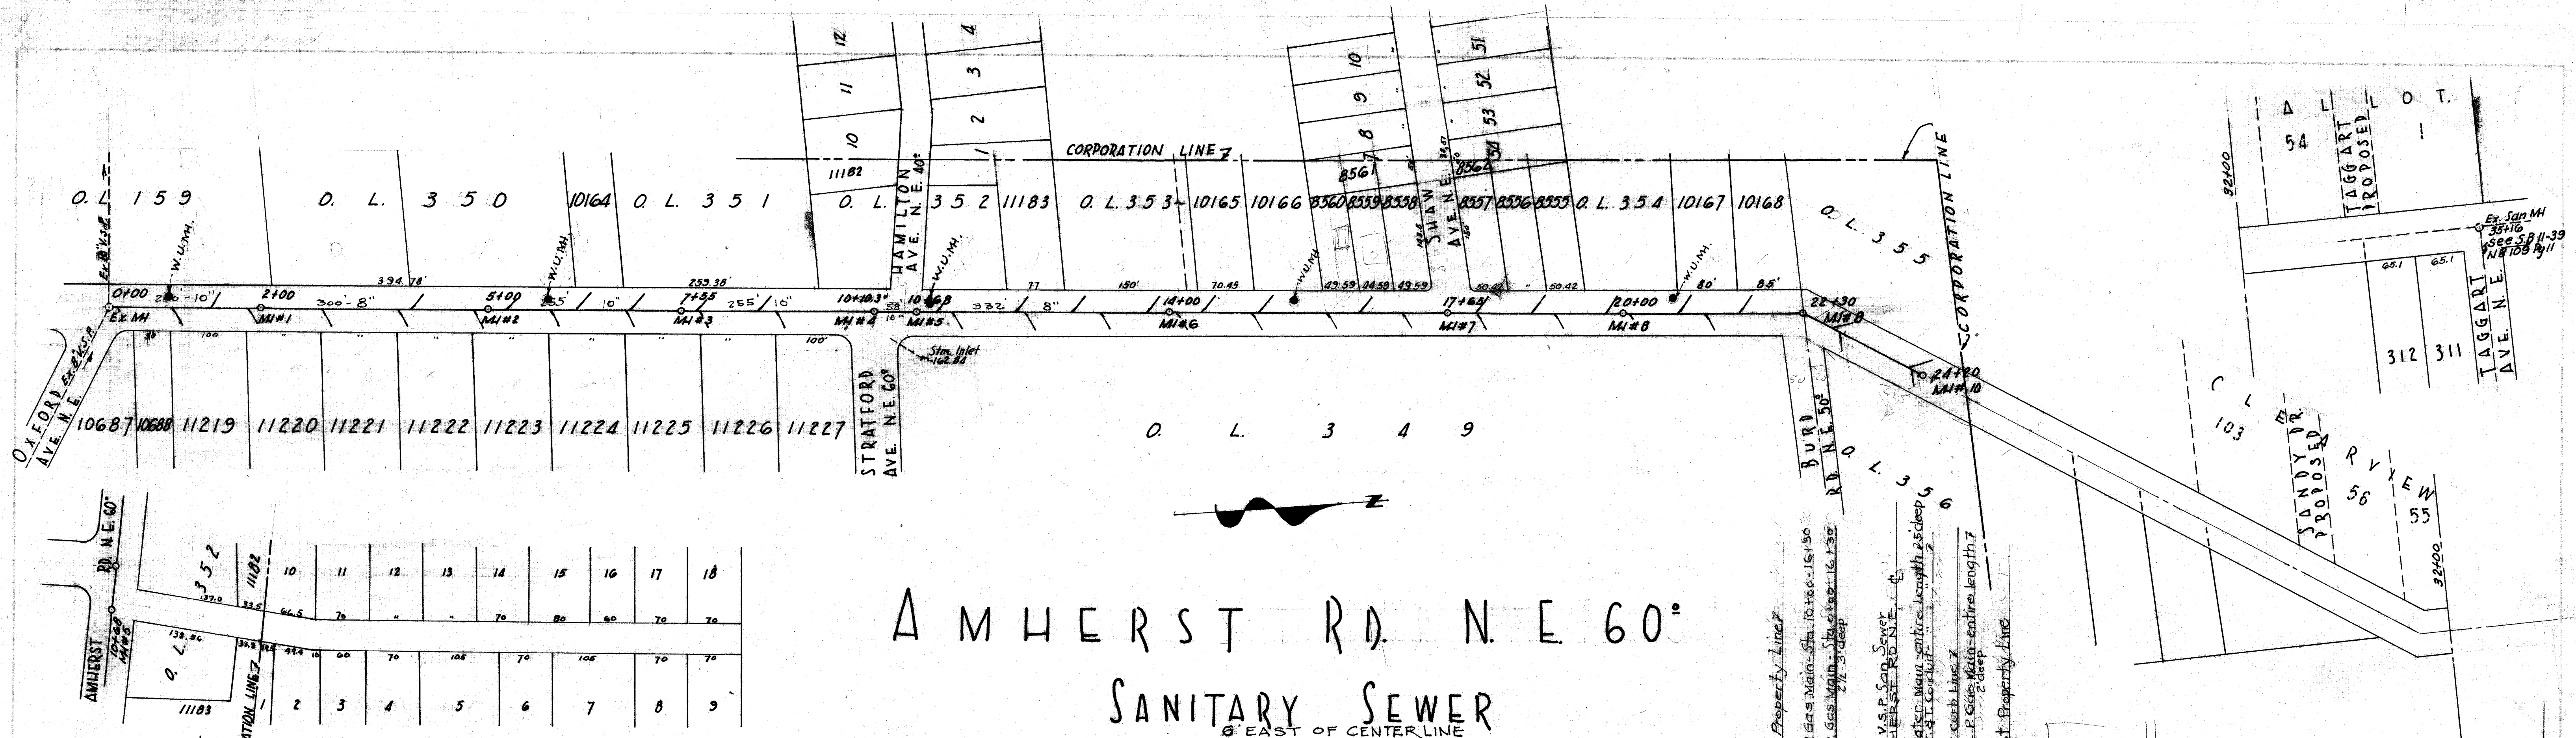

- NOTES
1. All pipe to be Class I with slipseal joints.
 2. Top 12" of all trenches to be backfilled with Bank Run Gravel suitable to Engineer. (Cost to be included in cost per foot of pipe.)
 3. Manholes to be either brick or concrete block and are to be plastered outside with 1:2 mortar 3/8" thick.
 4. Castings to be Massillon Standard.
 5. Trenches on sewer main to be kept backfilled at maximum of 50' behind machine.
 6. Trenches to be puddled where ordered by Inspector 177910.
 7. Maintenance of Traffic to be kept at a maximum at all times (consistent with conditions).
 8. All unused dirt to be removed from the street.
 9. All work on streets and private land to be neatly returned as near as possible to its original condition under Inspectors supervision. Final acceptance by the City will be held until this item is complied with.
 10. All laterals to be 6" and extended distance of 22' to curb line.
 11. Contractor to maintain trenches in good driving condition for a period of 1 year or until oiled by City.
 12. Payment for Drop Manholes to be included in price bid for Standard Manholes.

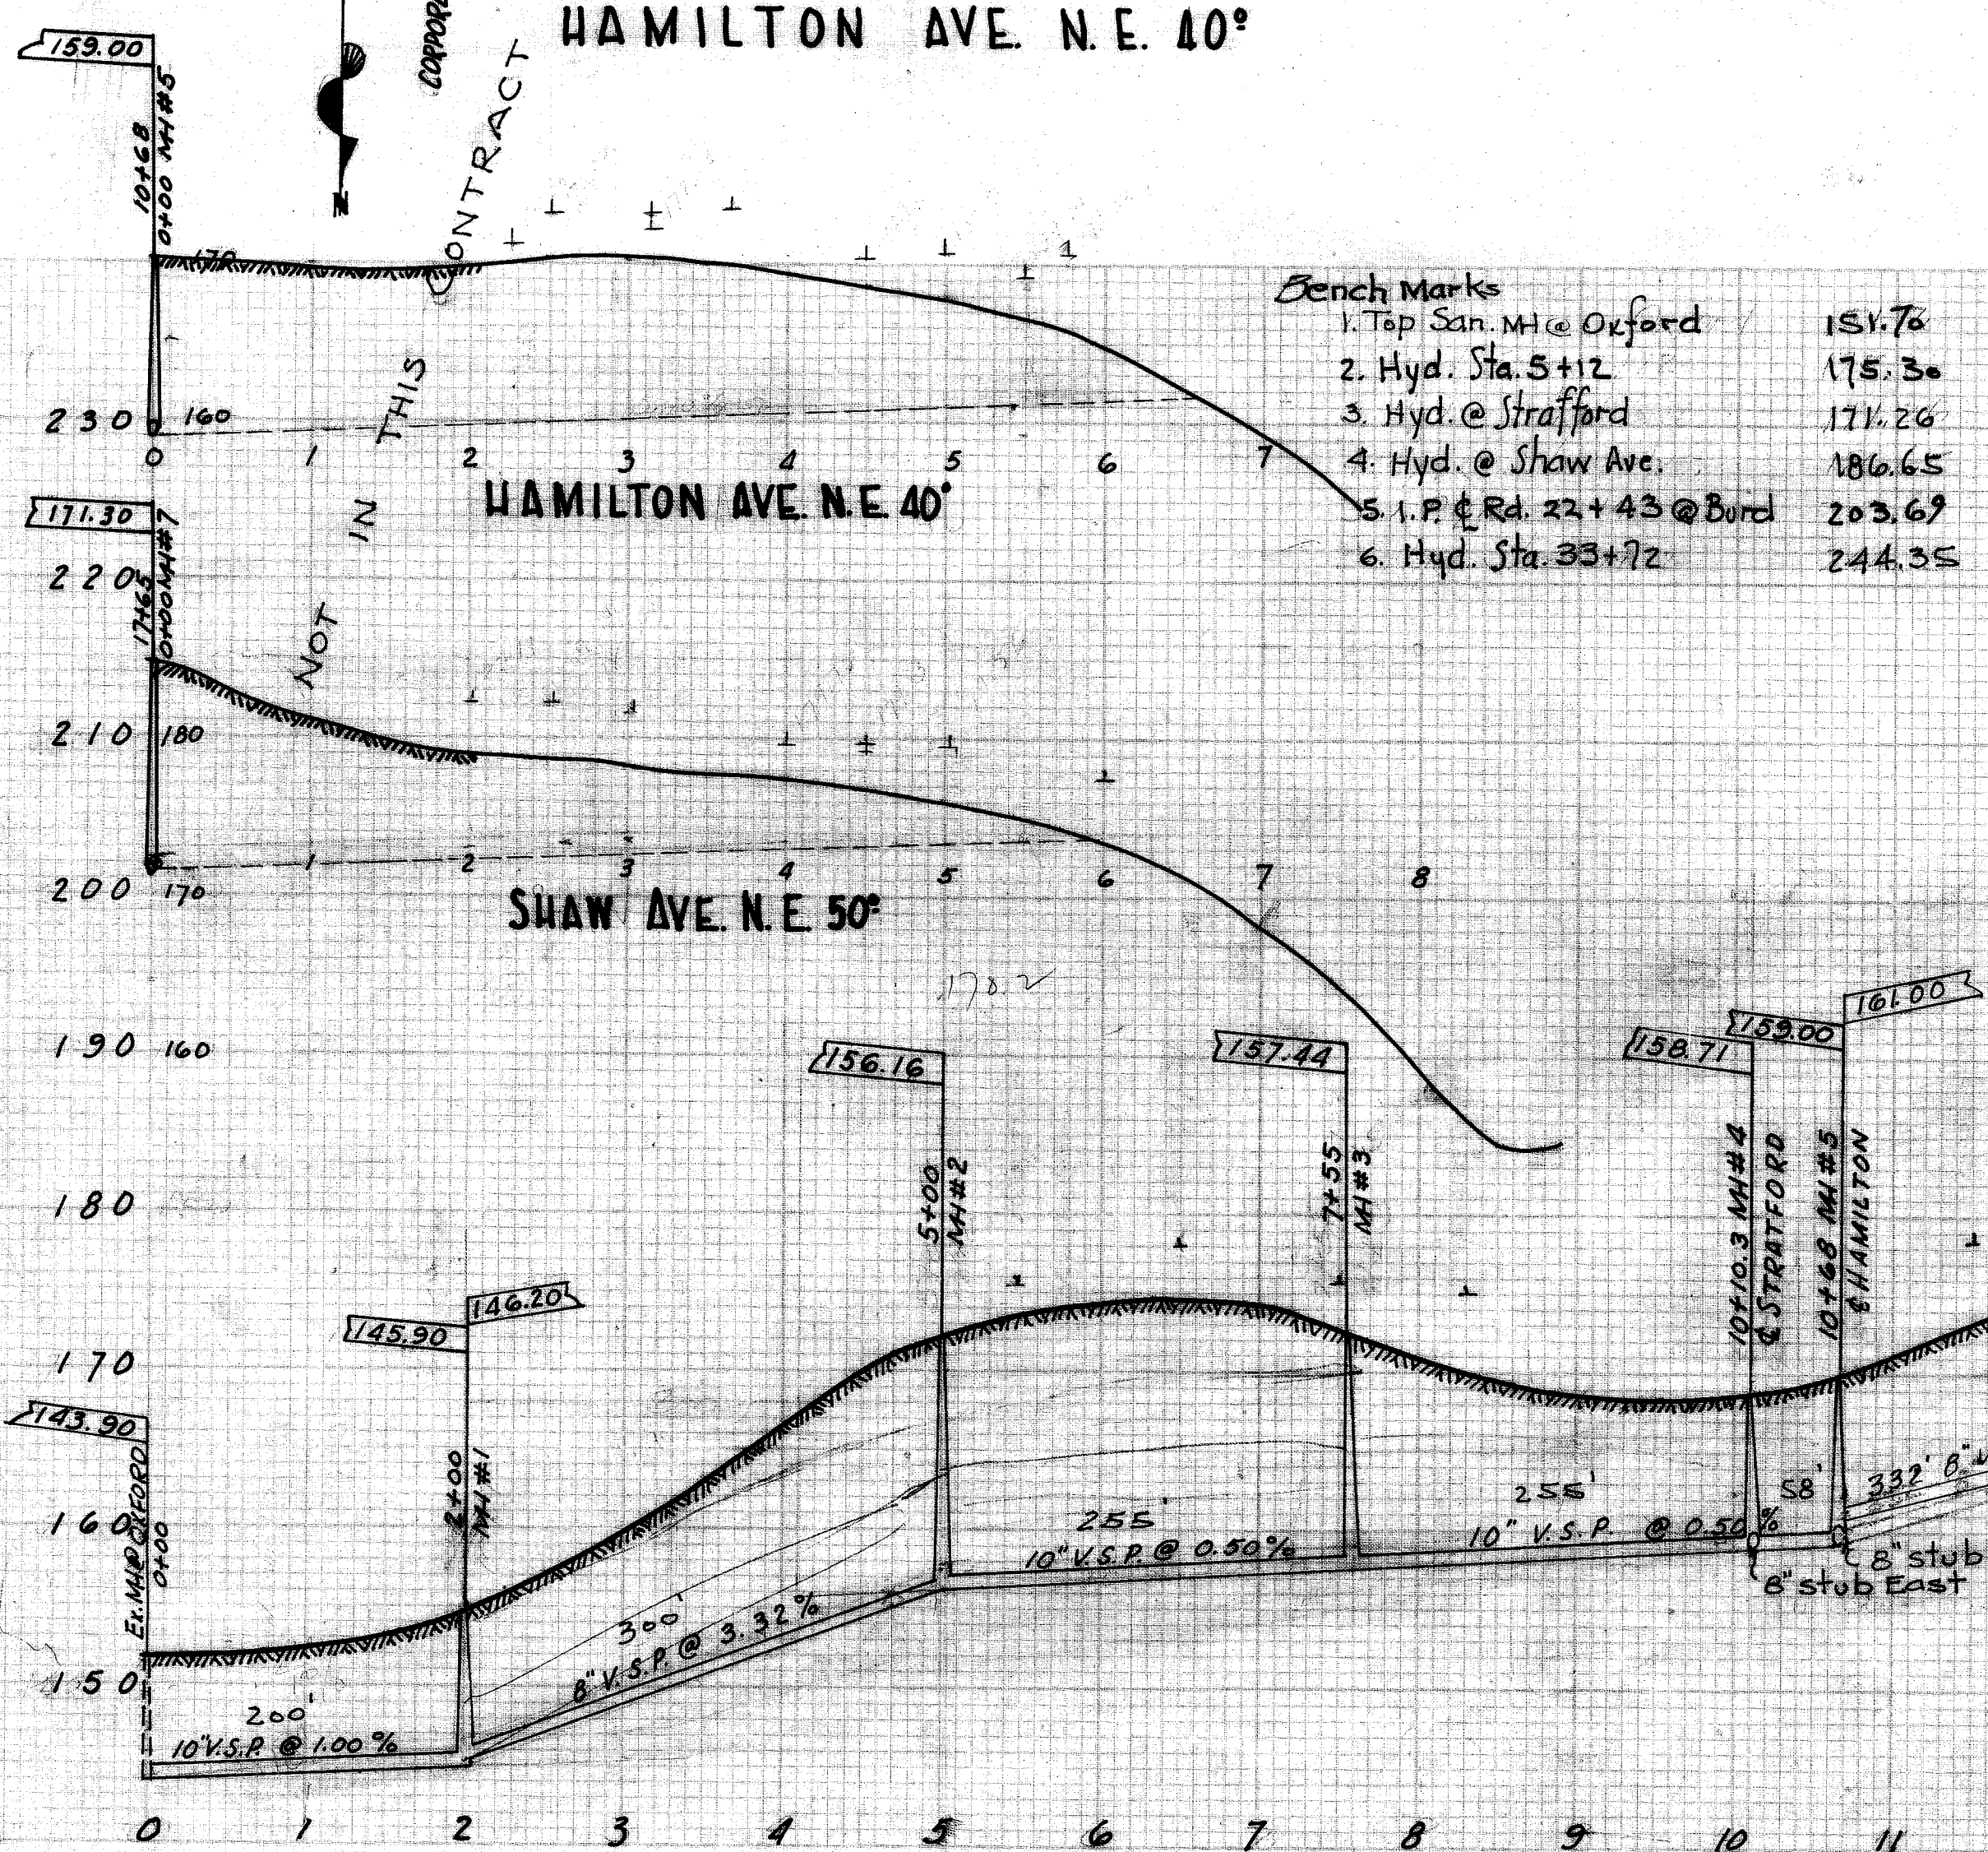