


FINAL SURVEY
DATE
BY
SURVEYED
PLOTTED
NOTE BOOK
NO.
AREAS CHECKED

ORIGINAL SURVEY
DATE
BY
SURVEYED
PLOTTED
NOTE BOOK
NO.
AREAS CHECKED

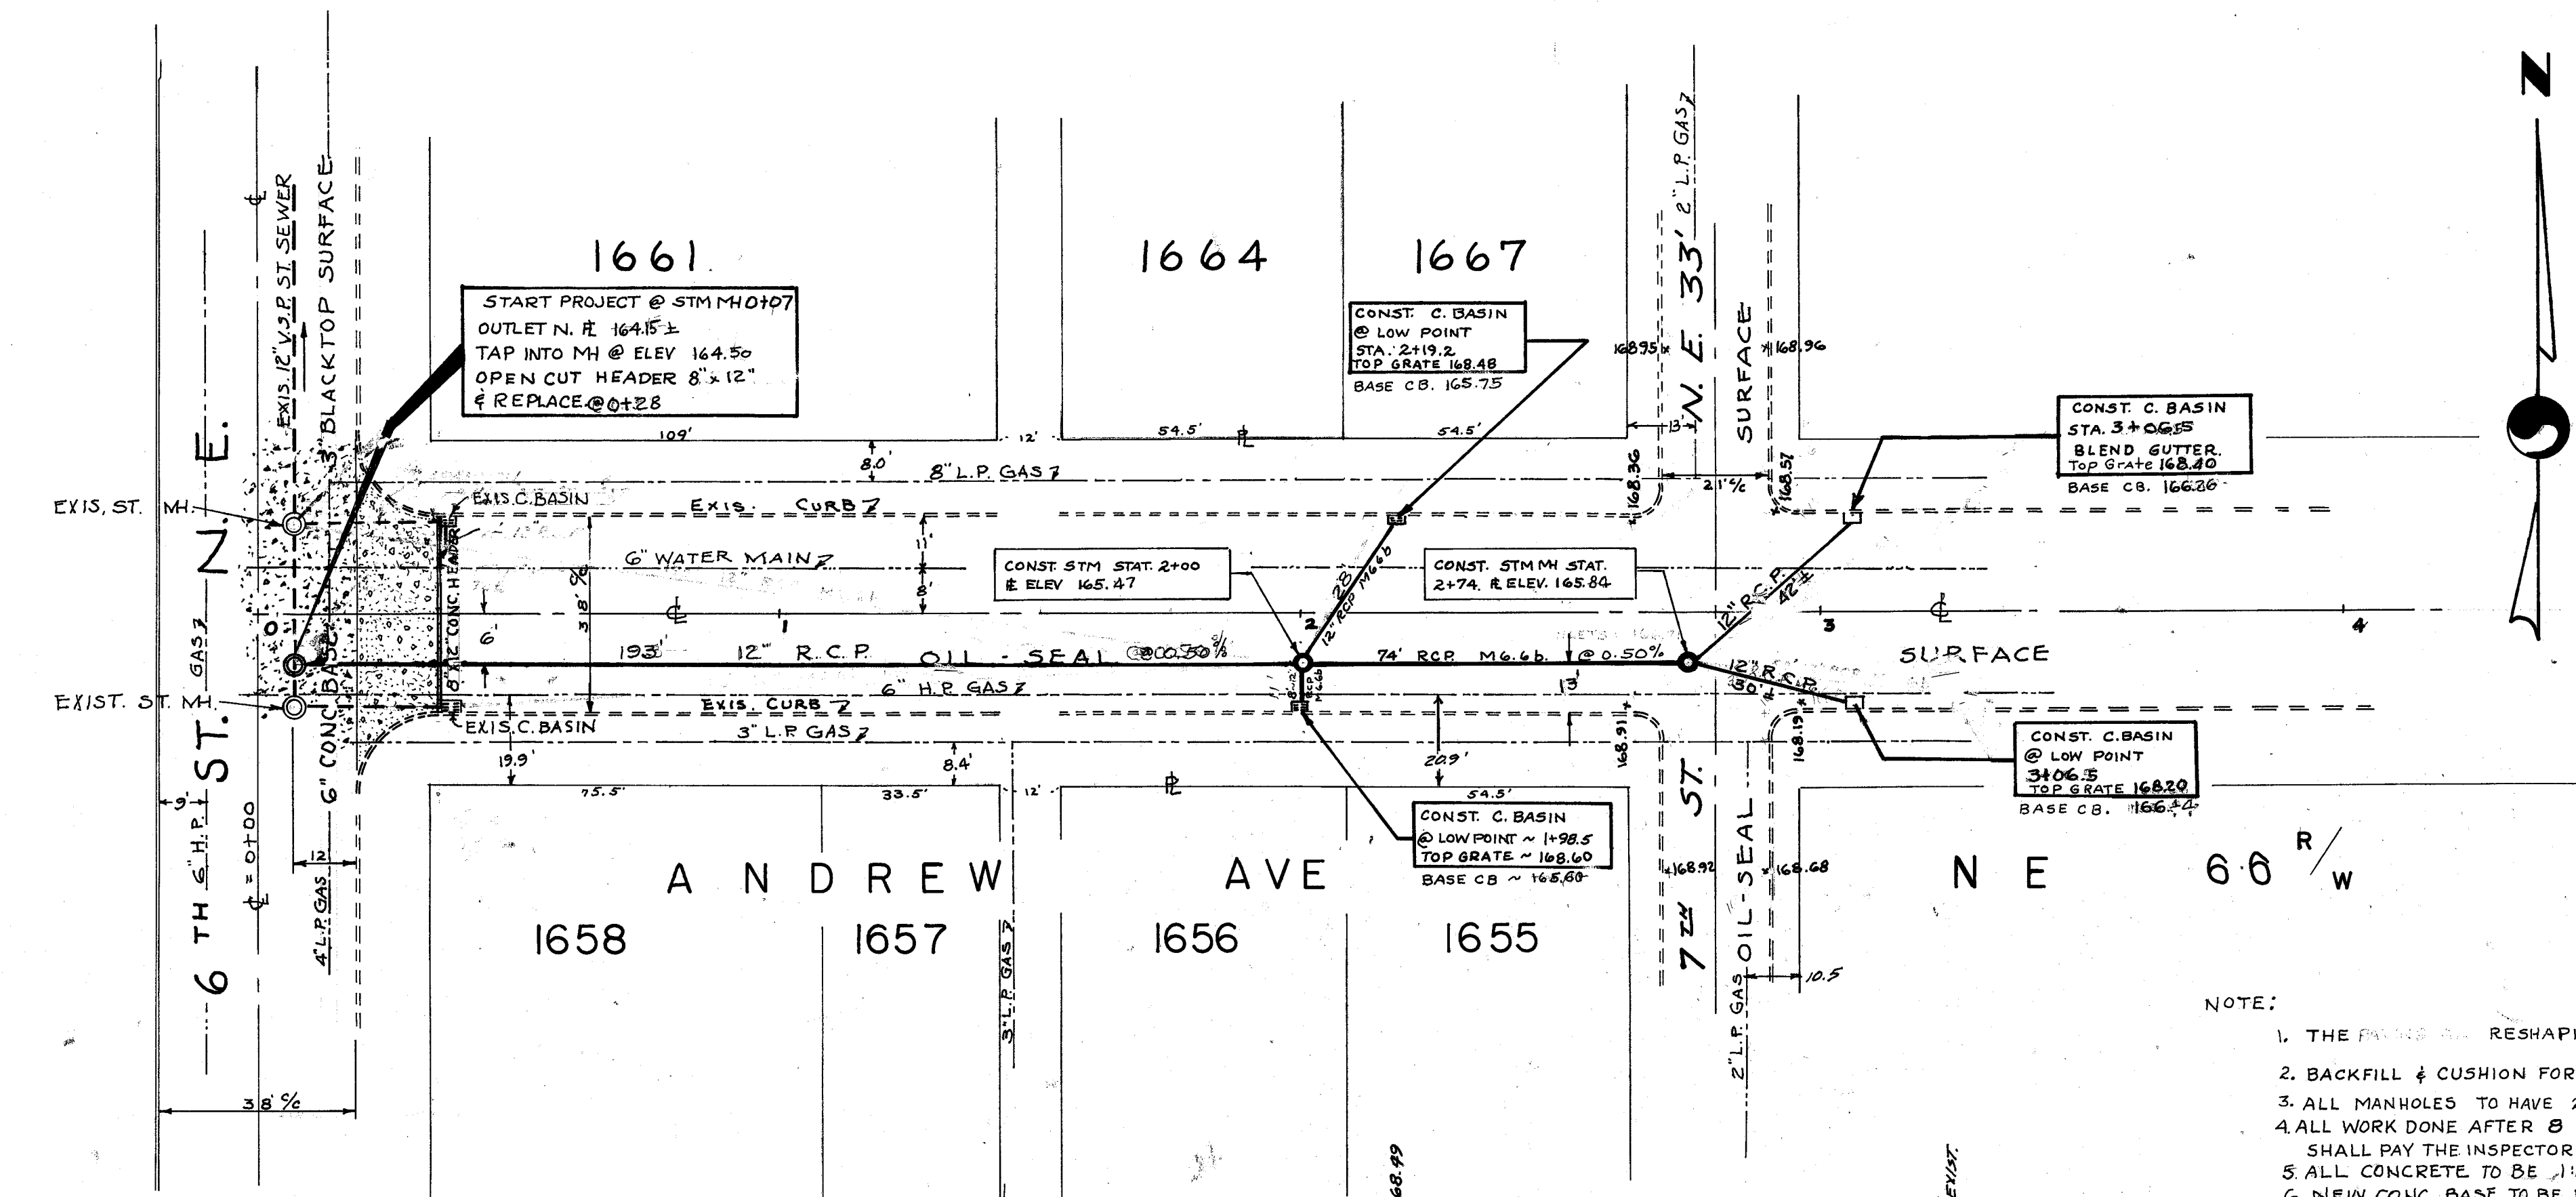

- NOTE:
1. THE EXISTING RESHAPING OF ROADWAY TO BE DONE BY CITY FORCES.
 2. BACKFILL & CUSHION FOR STM. SEWER WILL BE @ INSPECTORS DISCRETION.
 3. ALL MANHOLES TO HAVE 2' SUMPS, EXCEPT AT STA. 0+07
 4. ALL WORK DONE AFTER 8 HRS. OF EACH WORKING DAY THE CONTRACTOR SHALL PAY THE INSPECTOR TIME AND ONE-HALF HIS RATE, EXCLUDING SATURDAYS.
 5. ALL CONCRETE TO BE 1:2:4 - G.BAG MIX
 6. NEW CONC. BASE TO BE REINFORCED WITH WIRE MESH.
 7. UTILITY LINE LOCATIONS GIVEN TO CITY BY RESPECTIVE COMPANIES.
- CITY WILL NOT BE HELD RESPONSIBLE FOR TIME LOST BY CONTRACTOR FOR LOCATION, DEPTH OR LINE CHANGES (MAIN OR SERVICE).

CITY OF MASSILLON, OHIO.
ANDREW AVE. N.E.
STORM SEWER
FROM 6TH ST. N.E. TO 7TH ST. N.E.
APPROVED: [Signature]
CITY ENGINEER
DEPT. PUBLIC SERVICE
ENGINEERING DIVISION
DR. BY: O. DEBOS
CH. BY: [Signature]
APRIL 1967
SCALE: 1" = 25' HOR. N.B. 216
PAGE:

