

|        |    |          |         |       |         |
|--------|----|----------|---------|-------|---------|
| DATE   | BY | SURVEYED | PLOTTED | NOTED | CHECKED |
|        |    |          |         |       |         |
| FINAL  |    |          |         |       |         |
| SURVEY |    |          |         |       |         |
| BOOK   |    |          |         |       |         |
| NO.    |    |          |         |       |         |




|          |    |          |         |       |         |
|----------|----|----------|---------|-------|---------|
| DATE     | BY | SURVEYED | PLOTTED | NOTED | CHECKED |
|          |    |          |         |       |         |
| ORIGINAL |    |          |         |       |         |
| SURVEY   |    |          |         |       |         |
| BOOK     |    |          |         |       |         |
| NO.      |    |          |         |       |         |

| QUANTITIES |                                       |
|------------|---------------------------------------|
| NO.        | ITEM                                  |
| 4          | TYPE "B" CATCH BASINS MODIFIED        |
| 1          | TYPE "A" CATCH BASIN                  |
| 2          | MANHOLES 13 VERT. FT. WITH OPEN GRATE |
|            | 639 LIN. FT. 18" RCP CLASS II         |
|            | 30 LIN. FT. 12" RCP CLASS II          |
|            | 3 LIN. FT. OF CURB & GUTTER           |

# GENERAL NOTES:

- ALL CONSTRUCTION TO BE PER CITY OF MASSILLON SPECIFICATIONS AND STANDARDS.
- PRICE PER LIN. FT. OF PIPE SHALL INCLUDE BEDDING COMPACTED BACKFILL CONNECTING EXISTING PIPE TO MANHOLE, ETC.
- CONTRACTOR SHALL PAY THE CITY'S INSPECTORS FOR ALL WORK BEFORE 7:30 A.M. AND AFTER 4:00 P.M. MONDAY THRU FRIDAY AND ALL HOURS ON SATURDAY AND SUNDAY OR HOLIDAYS AT TIME AND ONE HALF THE RATE IN THE CITY'S WAGE ORD. THAT IS IN EFFECT.
- CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES BEFORE WORK IS BEGUN.
- ALL CHIP AND SEAL STREETS SURFACES WITHIN PLAN LIMITS SHALL BE REPLACED BY OTHERS. SURFACES OUTSIDE THESE LIMITS SHALL BE REPLACED AT CONTRACTOR'S EXPENSE IF DAMAGED BY HIM.
- CONSTRUCTION SIGNS: CONTRACTOR SHALL ERECT AND MAINTAIN ALL NECESSARY CONSTRUCTION SIGNS, BARRICADES AND LIGHTS.
- REPLACE ALL EXISTING STREET SIGNS, IF DAMAGED, CONTRACTOR TO REPLACE AT HIS OWN EXPENSE.
- SEEDING: AREAS WITHIN CONSTRUCTION EASEMENTS THAT ARE ORDERED TO BE SEED BY THE ENGINEER SHALL BE PAID UNDER SEEDING ITEM. AREAS DAMAGED BY THE CONTRACTOR OUTSIDE CONSTRUCTION EASEMENTS MUST BE RESTORED TO ORIGINAL CONDITION AT NO EXPENSE TO THE CITY.
- ALL SALVAGED MATERIAL, CULVERTS, ETC. TO REMAIN PROPERTY OF THE CITY.

PIPE - 14' OFF  $\phi$  ??  
WATER LINE - 11.5' OF  $\phi$

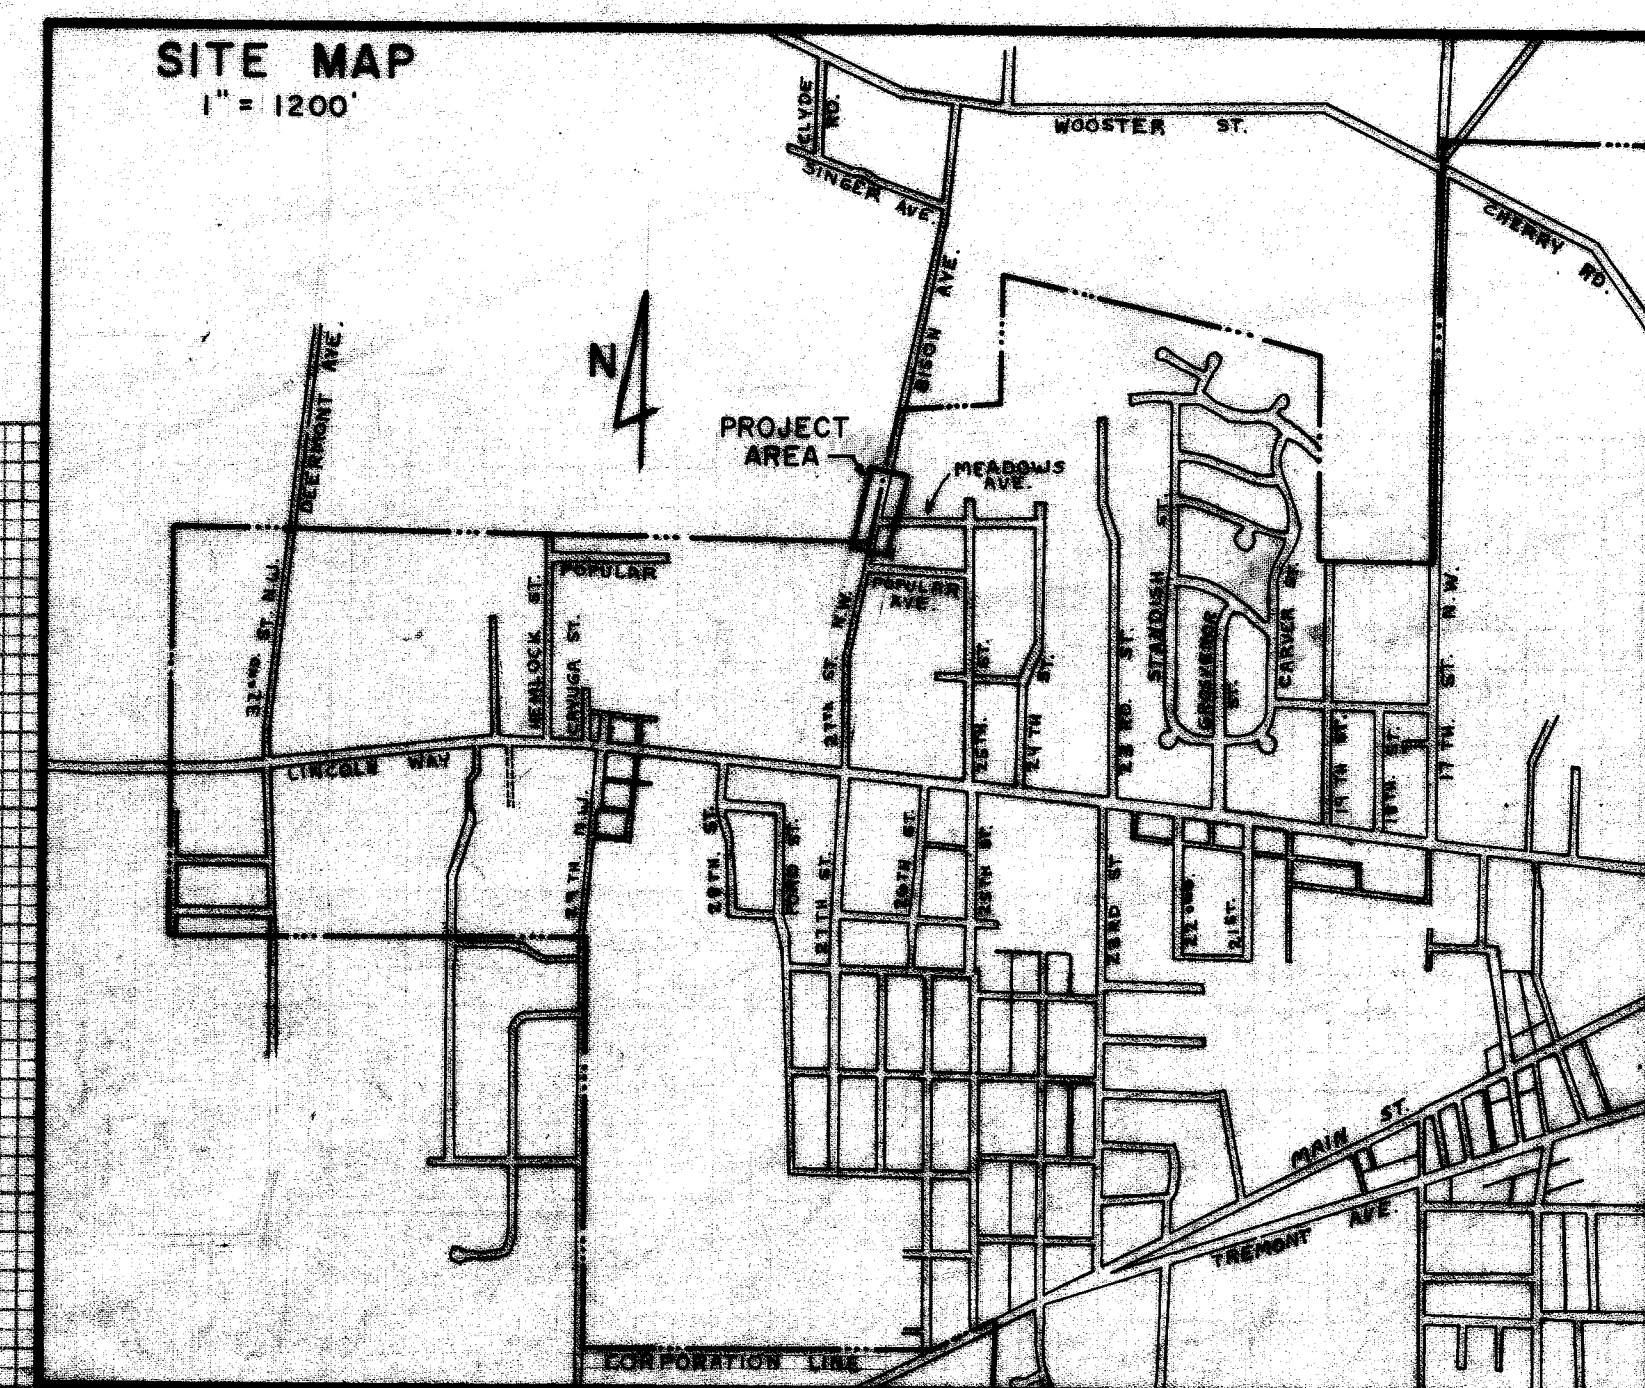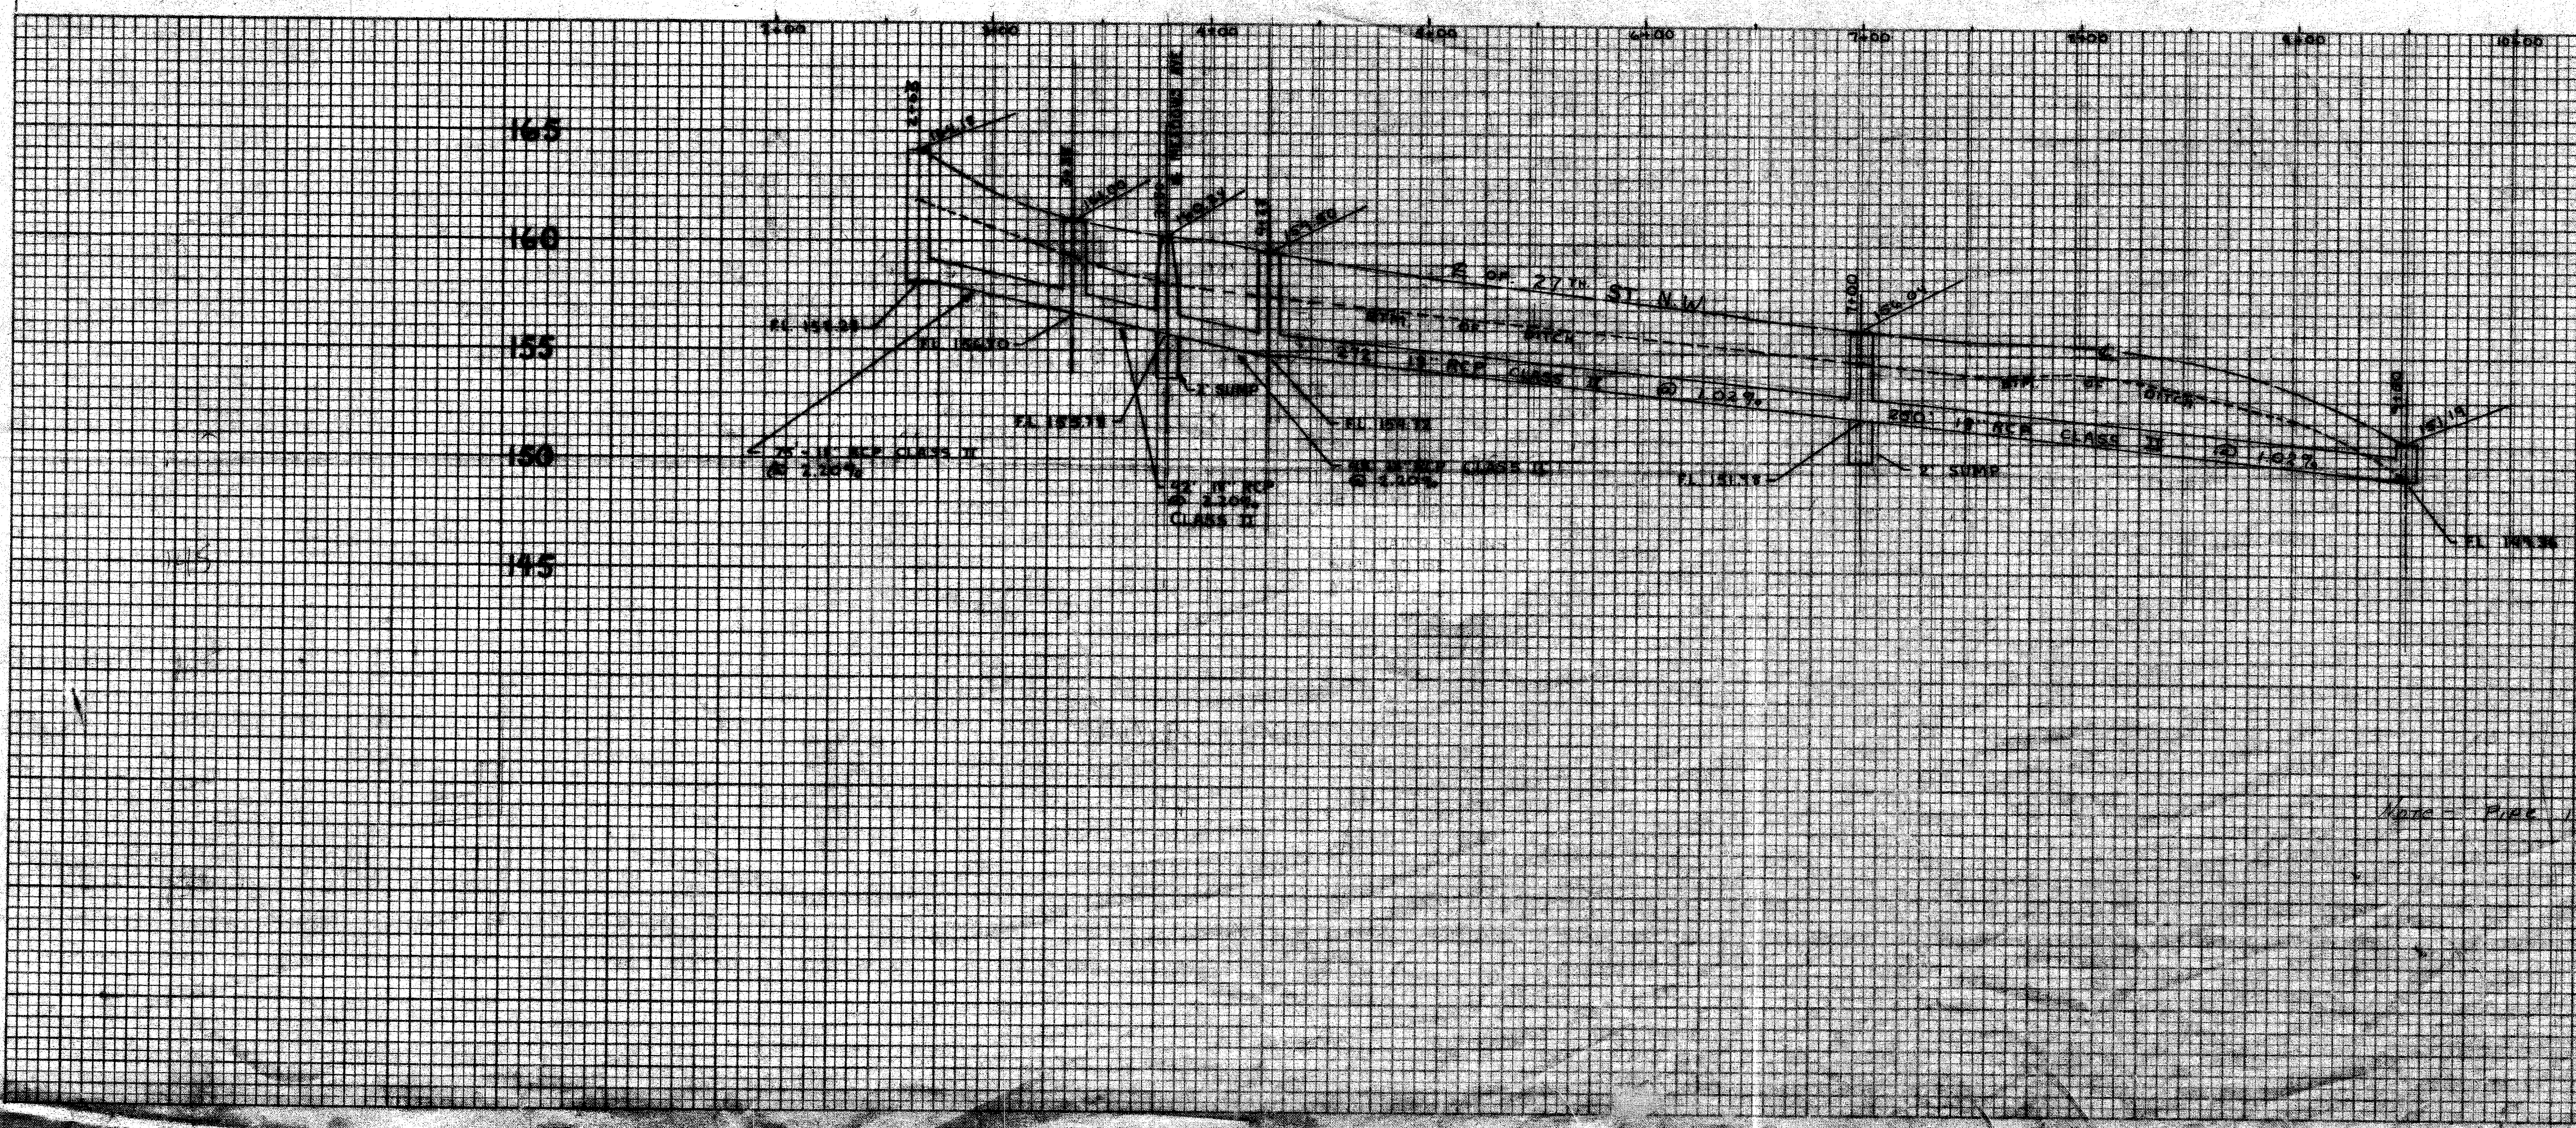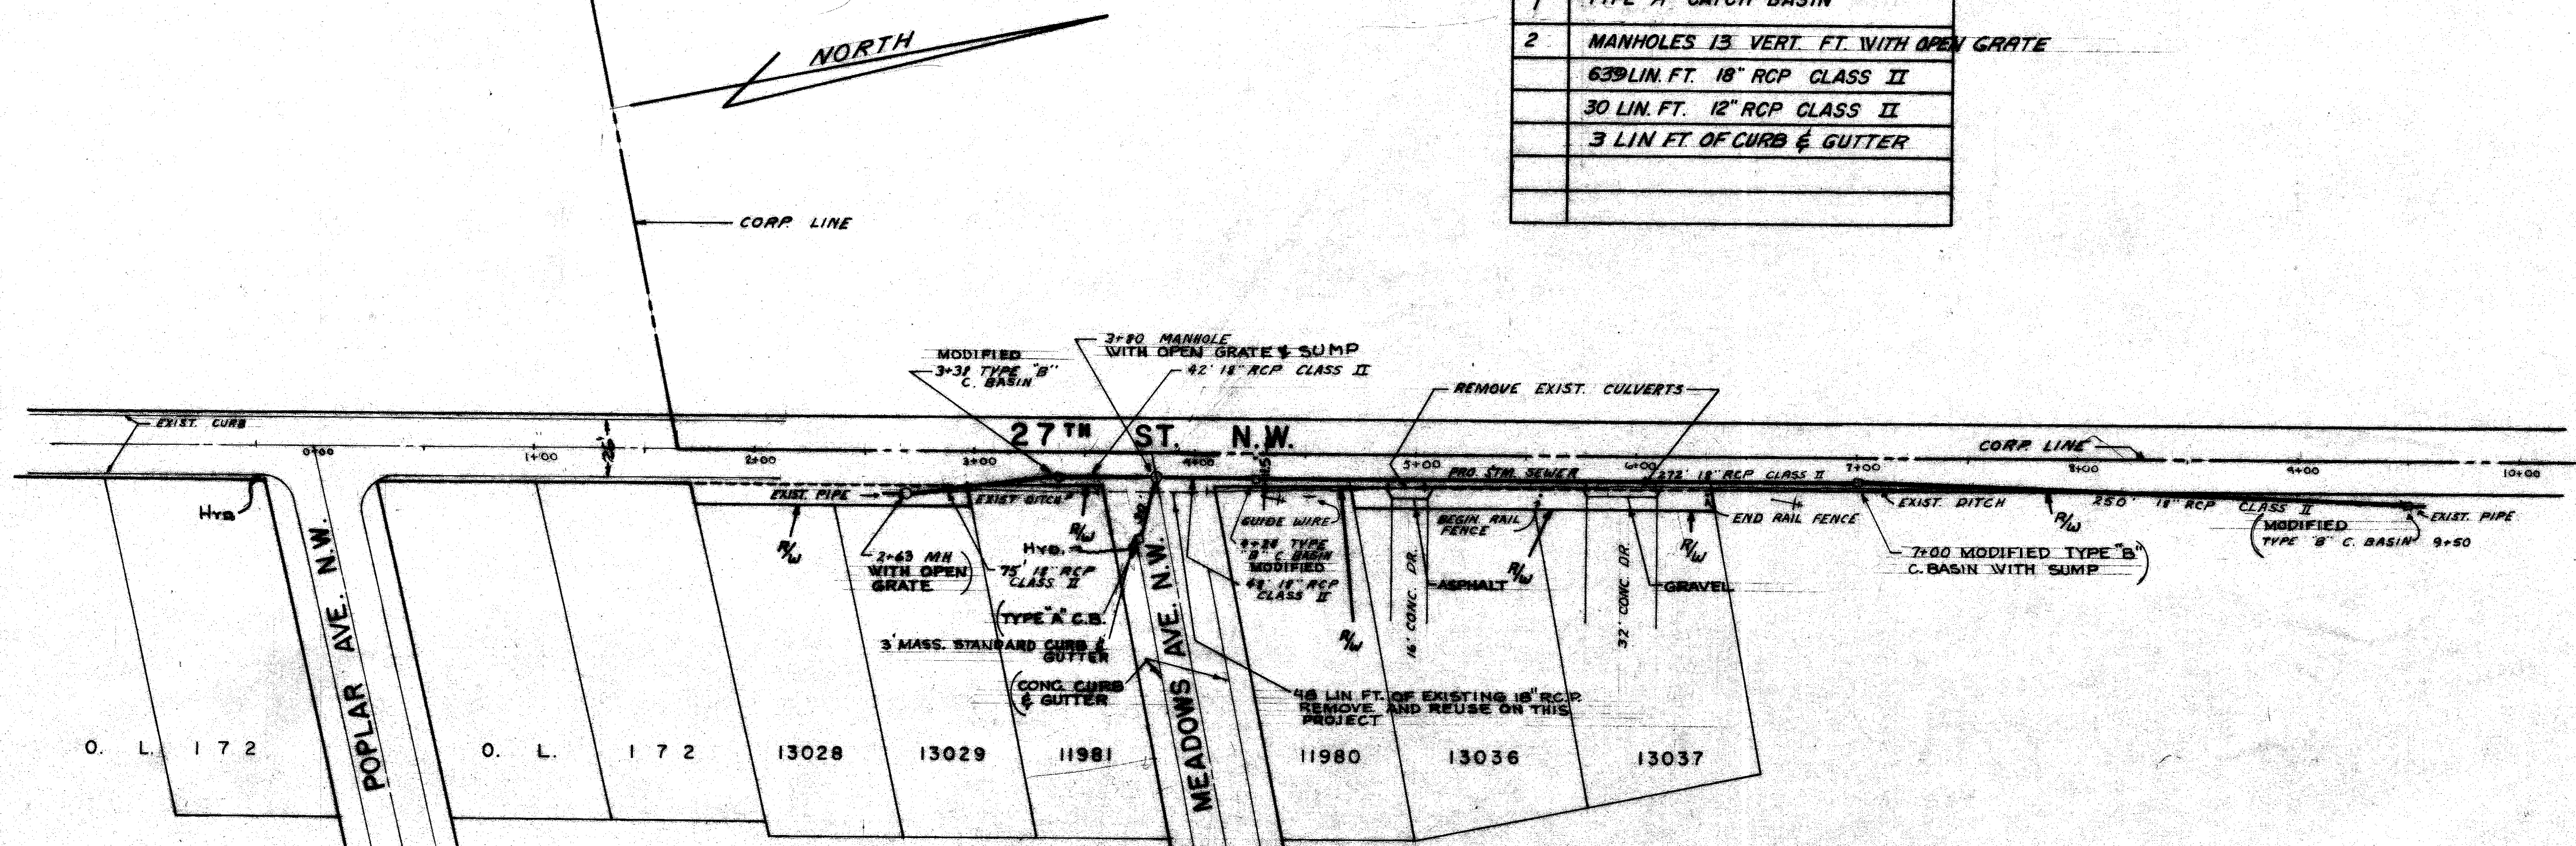

## BENCH MARK

TOP OF HYD. S.E. COR. 27TH & POPLAR  
178.14

CITY OF MASSILLON, OHIO  
27TH ST. N.W.  
STORM SEWER

DR. BY TERRY RIDGLEY DEPT. OF PUBLIC SERVICE  
ENGINEERING DIVISION  
CITY ENG. ROBERT WAGONER  
SCALE VERT. 1" = 5' HORIZ. 1" = 50' ALSO SEE P. 2