



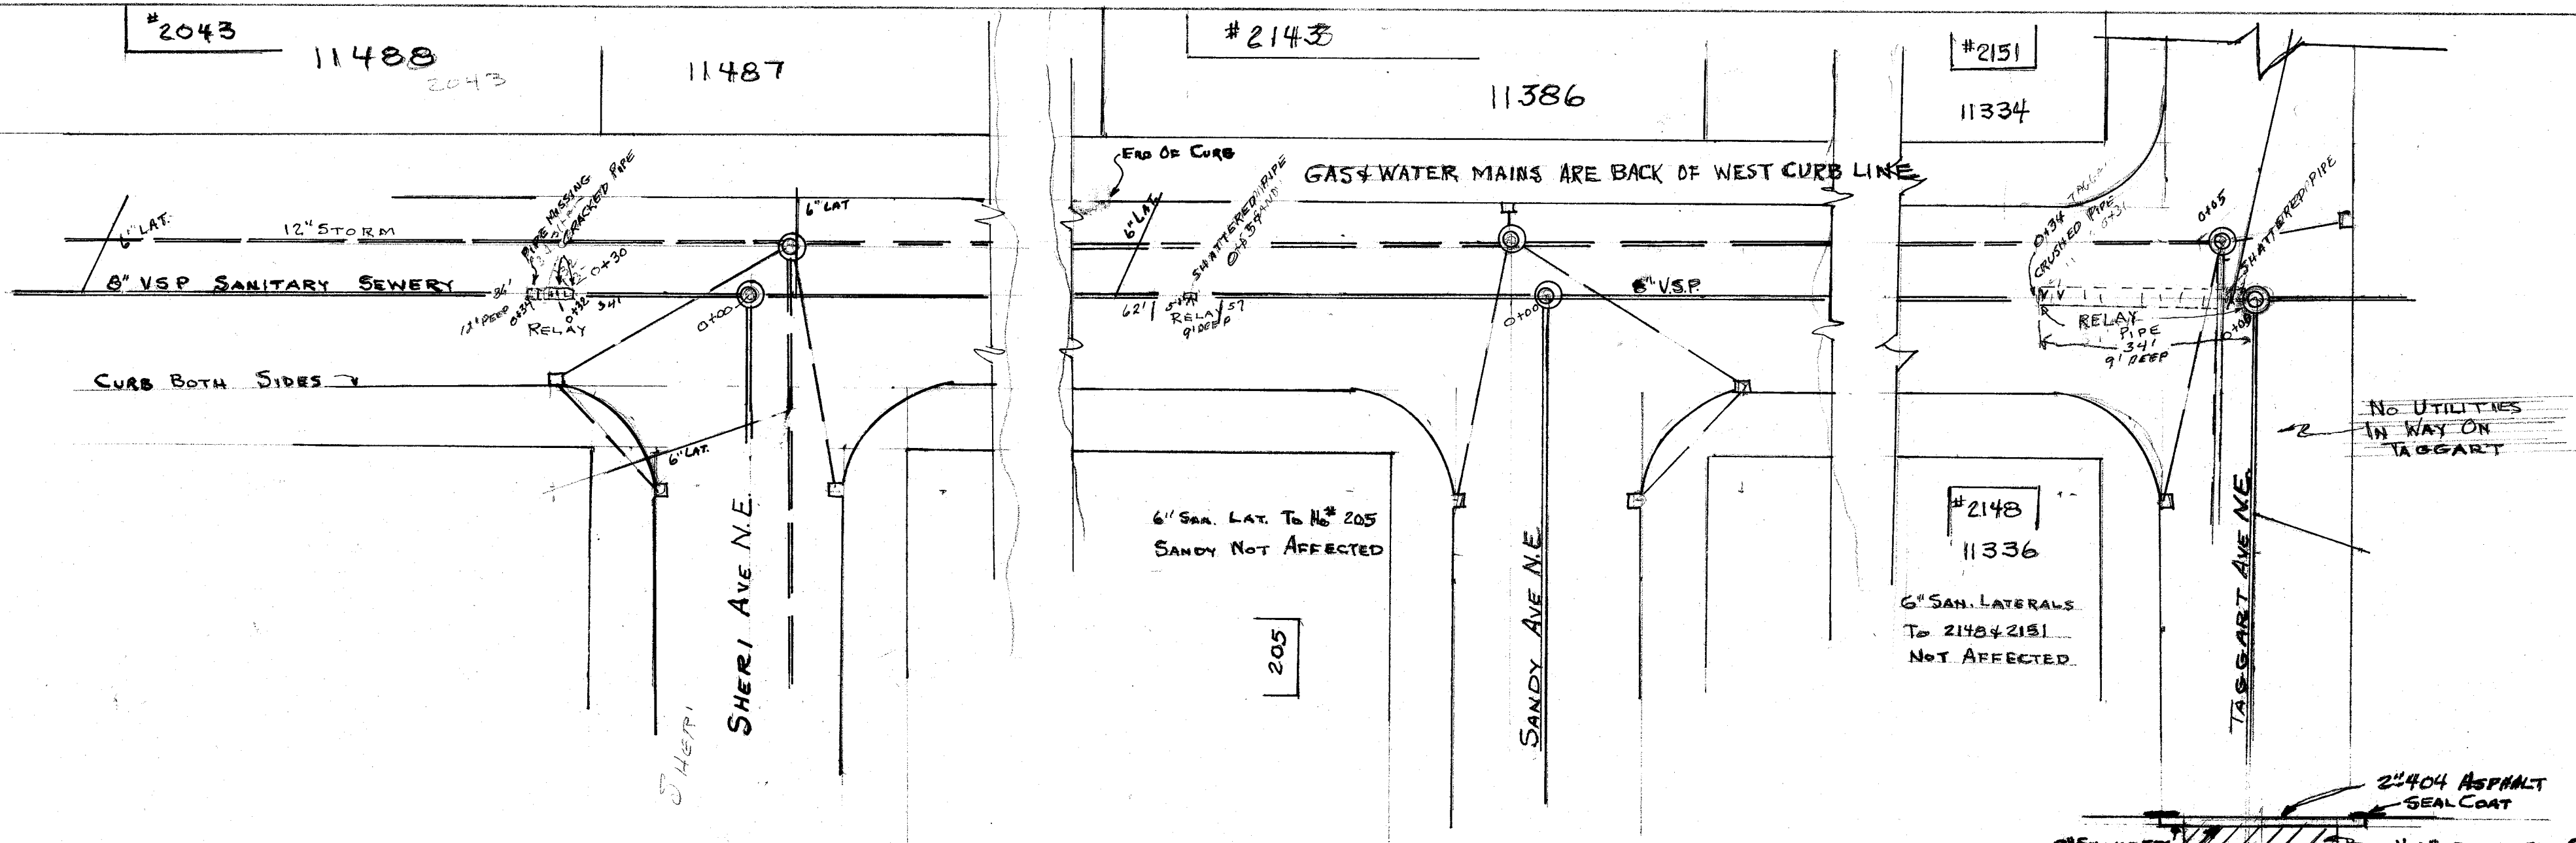

CLEARVIEW AVE N.E.

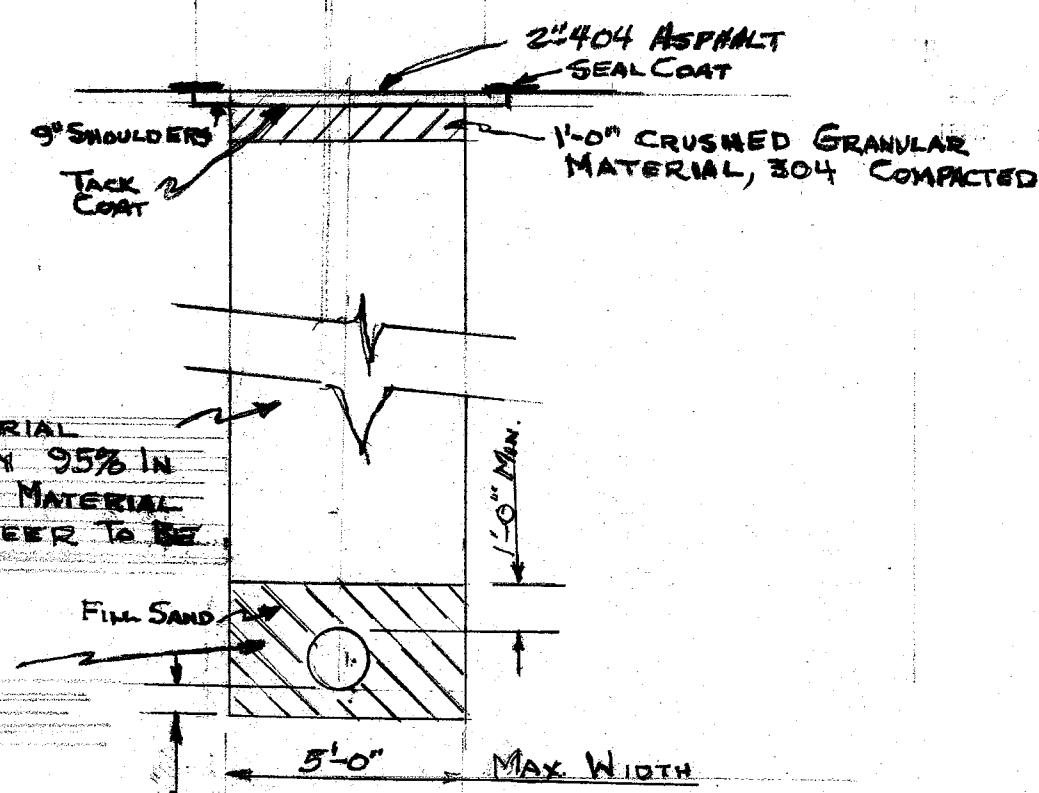


NOTES

THE INTENT OF THIS CONTRACT IS TO REPAIR THE BREAKS IN THE PIPE AS SHOWN BY THE TELEVISIONING OF THE SANITARY SEWER ON CLEARVIEW. DIMENSIONS AS SHOWN ARE FROM C.E. OF MANHOLES AND AS RECORDED FROM THE TELEVISION CAMERA METER AND ARE PRESUMED TO BE ACCURATE. THIS PROJECT WILL BE BID LUMP SUM, THIS MEANS ONE PRICE FOR THE ENTIRE PROJECT AS NOTED ON THE DRAWING & SKETCH. EXTRA STRENGTH PIPE IS TO BE USED. THE NEW PIPE IS TO BE CONNECTED TO THE EXISTING PIPE BY USING APPROVED MANUFACTURED COUPLINGS. TELEVISION SHOWS THAT THE EXISTING SEWER IS IN GOOD SHAPE EXCEPT AS NOTED IN THE DRAWING, ADDITIONAL REPAIR IF NEEDED WILL BE AT CONTRACTOR'S EXPENSE. ALL CONSTRUCTION TO BE PER CITY OF MASSILLON SPECIFICATIONS AND STANDARDS EXCEPT AS NOTED IN THE GENERAL NOTES AND SPECIFICATIONS. THE MAXIMUM WIDTH OF SEWER TRENCH SHALL BE 5 FEET, ANY WIDTH OVER THIS AMOUNT AND ANY MATERIAL USED BEYOND THIS WIDTH SHALL BE AT THE CONTRACTOR'S EXPENSE. ANY MARKED SERVICE LINES THAT ARE BROKEN WILL BE REPAIRED AT CONTRACTOR'S EXPENSE. CONCRETE ENCASEMENT AS NEEDED AT MANHOLE WILL BE INCLUDED IN THE BID PRICE OF THE PROJECT. CONTRACTOR TO BE RESPONSIBLE TO MAINTAIN ROAD UNTIL PERMANENT REPAIRS ARE MADE IN SUITABLE WEATHER. CERTIFIED WEIGHT SLIPS MUST BE SHOWN, IF BANK RUN MATERIAL IS USED. PUMPING OF SEWER, IF NEEDED, IS TO BE INCLUDED IN THE BID PRICE OF THE PROJECT.

ALTERNATE

115 TONS BANK RUN MATERIAL TO BE USED PER ENGINEER'S ORDER.

SEWER REPAIRED BY
PLAS EXCAVATING
DEC. 1982

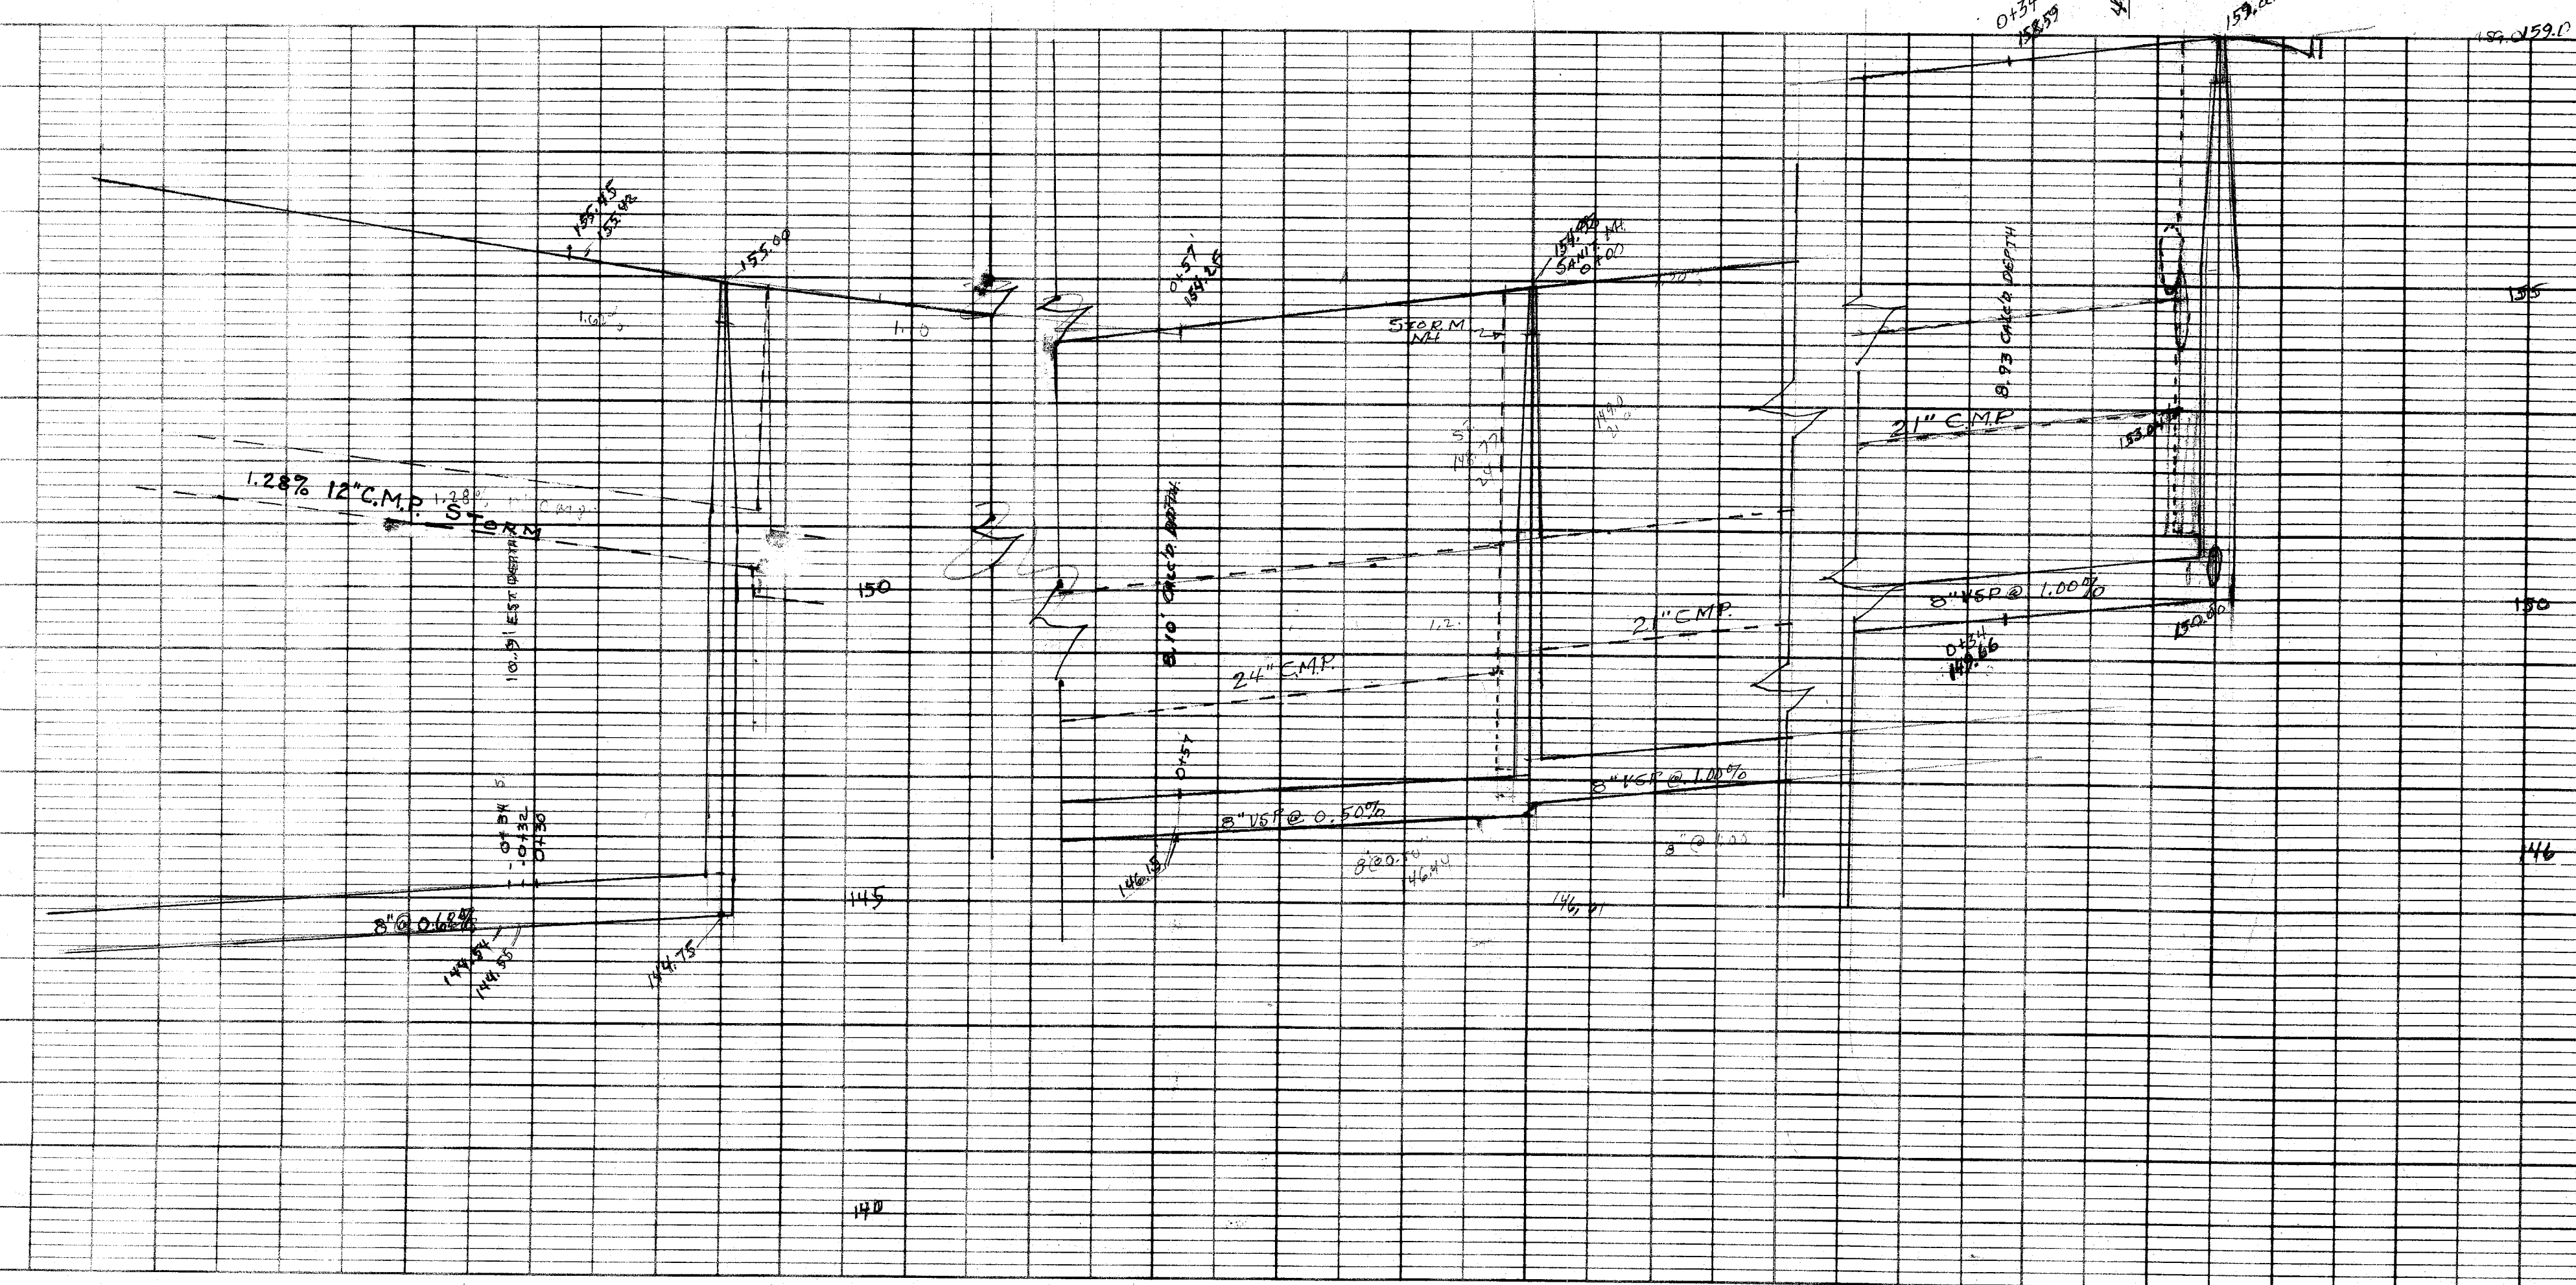

CITY OF MASSILLON
REPAIR OF SANITARY SEWER
CLEARVIEW AVE N.E.
DECEMBER, 1982
SCALE 1" = 20'

DATE	
BY	
CHECKED	
APPROVED	
MAP	
MOLE BOOK	
NO. 10	

DATE	
BY	
CHECKED	
APPROVED	
MOLE BOOK	
NO. 10	