
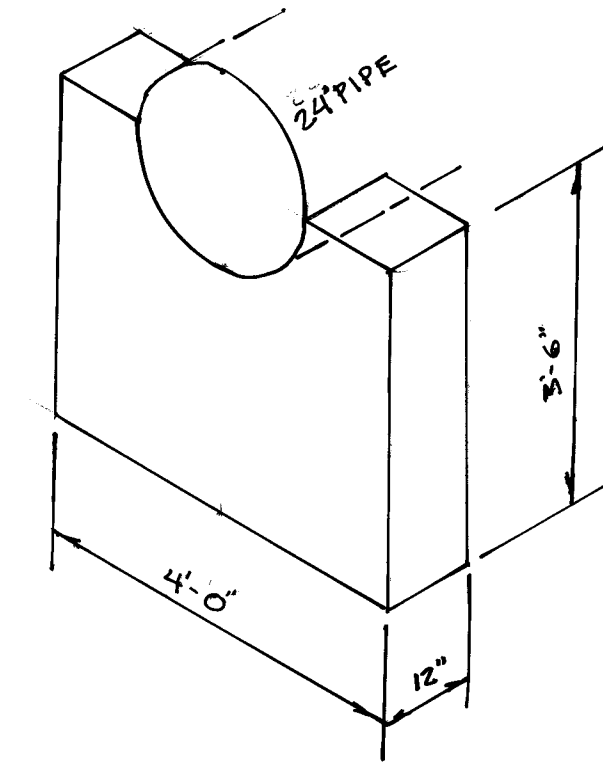



FINAL SURVEY	SURVEYED	BY	DATE
NO.	PILOTED		
	NOTE BOOK		
	AREAS CHECKED		

ORIGINAL SURVEY	SURVEYED	BY	DATE
NO.	PILOTED		
	NOTE BOOK		
	AREAS CHECKED		

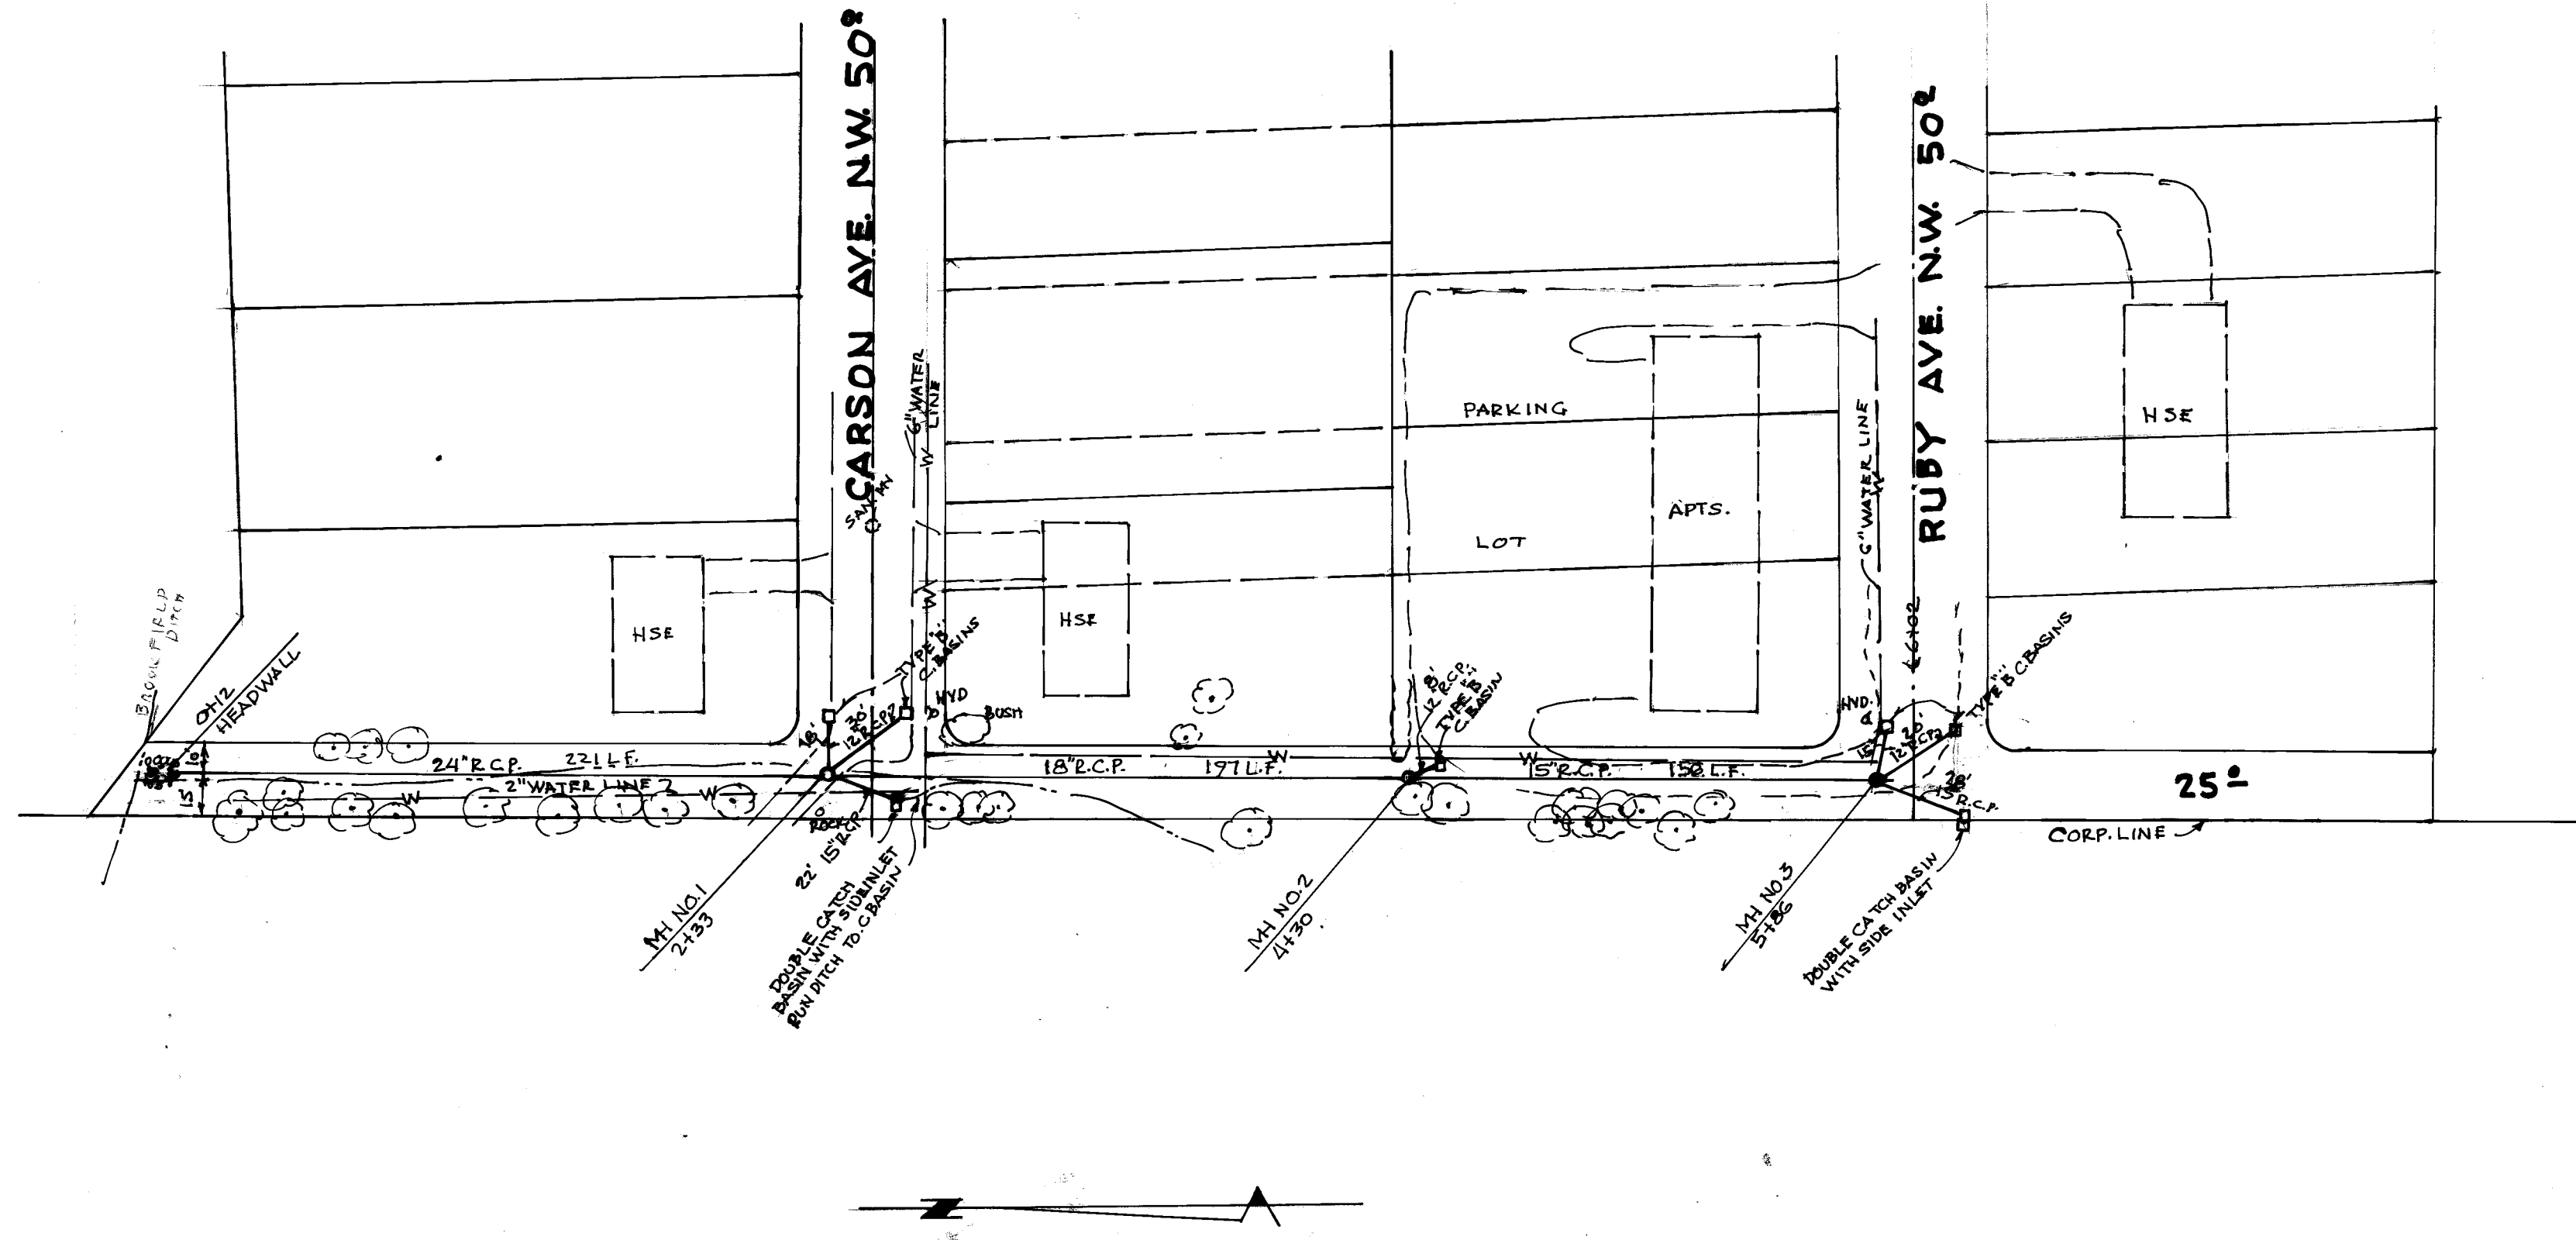

HEADWALL HW-4
SCALE 1" = 2'
.43 Q.U.V.D.

- GENERAL NOTES**
- * All construction to be City of Massillon specifications and standards, the latest edition of the State of Ohio, Department of Transportation, Construction and Material Specifications and follow all OSHA regulations and requirements.
 - * A preconstruction meeting shall be held with the contractor, subcontractors, City Engineer, Safety & Service Director, and the E.E.O. Director.
 - * The E.E.O. Director shall receive the required weekly and monthly reports on this project.
 - * When conflicts arise over the interpretation of notes and details in the drawings, the drawings take preference over general provisions and specifications that appear in the contracts.
 - * The contractor is responsible for having all the utilities marked by their respected companies.
 - * All work on street and private land is to be neatly returned as near as possible to its original condition under the inspectors supervision. Final acceptance by the City will be held up until this item is complied with.
 - * The Contractor is to be responsible for any damage on property outside the Right of Way.
 - * The contractor is responsible for the placement of all traffic control devices as to insure the safety of the workers and the general public.
 - * The cut in the existing pavement shall be extended 24" around the entire perimeter to subbase level to provide a shoulder on which the concrete slab base shall rest. This base shall be of 1:2:4, 6 bag mix, Portland cement concrete using high early strength cement and it must be cured at least forty-eight hours. The pad must be 9" thick and reinforced with No. 6 wire mesh. 1.5" of 402 shall be placed followed by a lift of 404 with a thickness of 1.5". All edges of the patch must be sealed with a roller and 705 Hot Applied Crack and Joint Sealer.
 - * Concrete castings are to be placed as directed by the Inspector.
 - * Manholes and catch basins are to be plastered on outside with 1/2" - 1:2 mortar.
 - * All ditches are to be compacted as directed in the latest edition of the State of Ohio, Department of Transportation, Construction and Material Specifications, so as not to settle.
 - * Trenches are to be backfilled no less than 50 feet from the trenching machine.
 - * All top soil is to be removed and replaced on top of the ditch after backfilling.

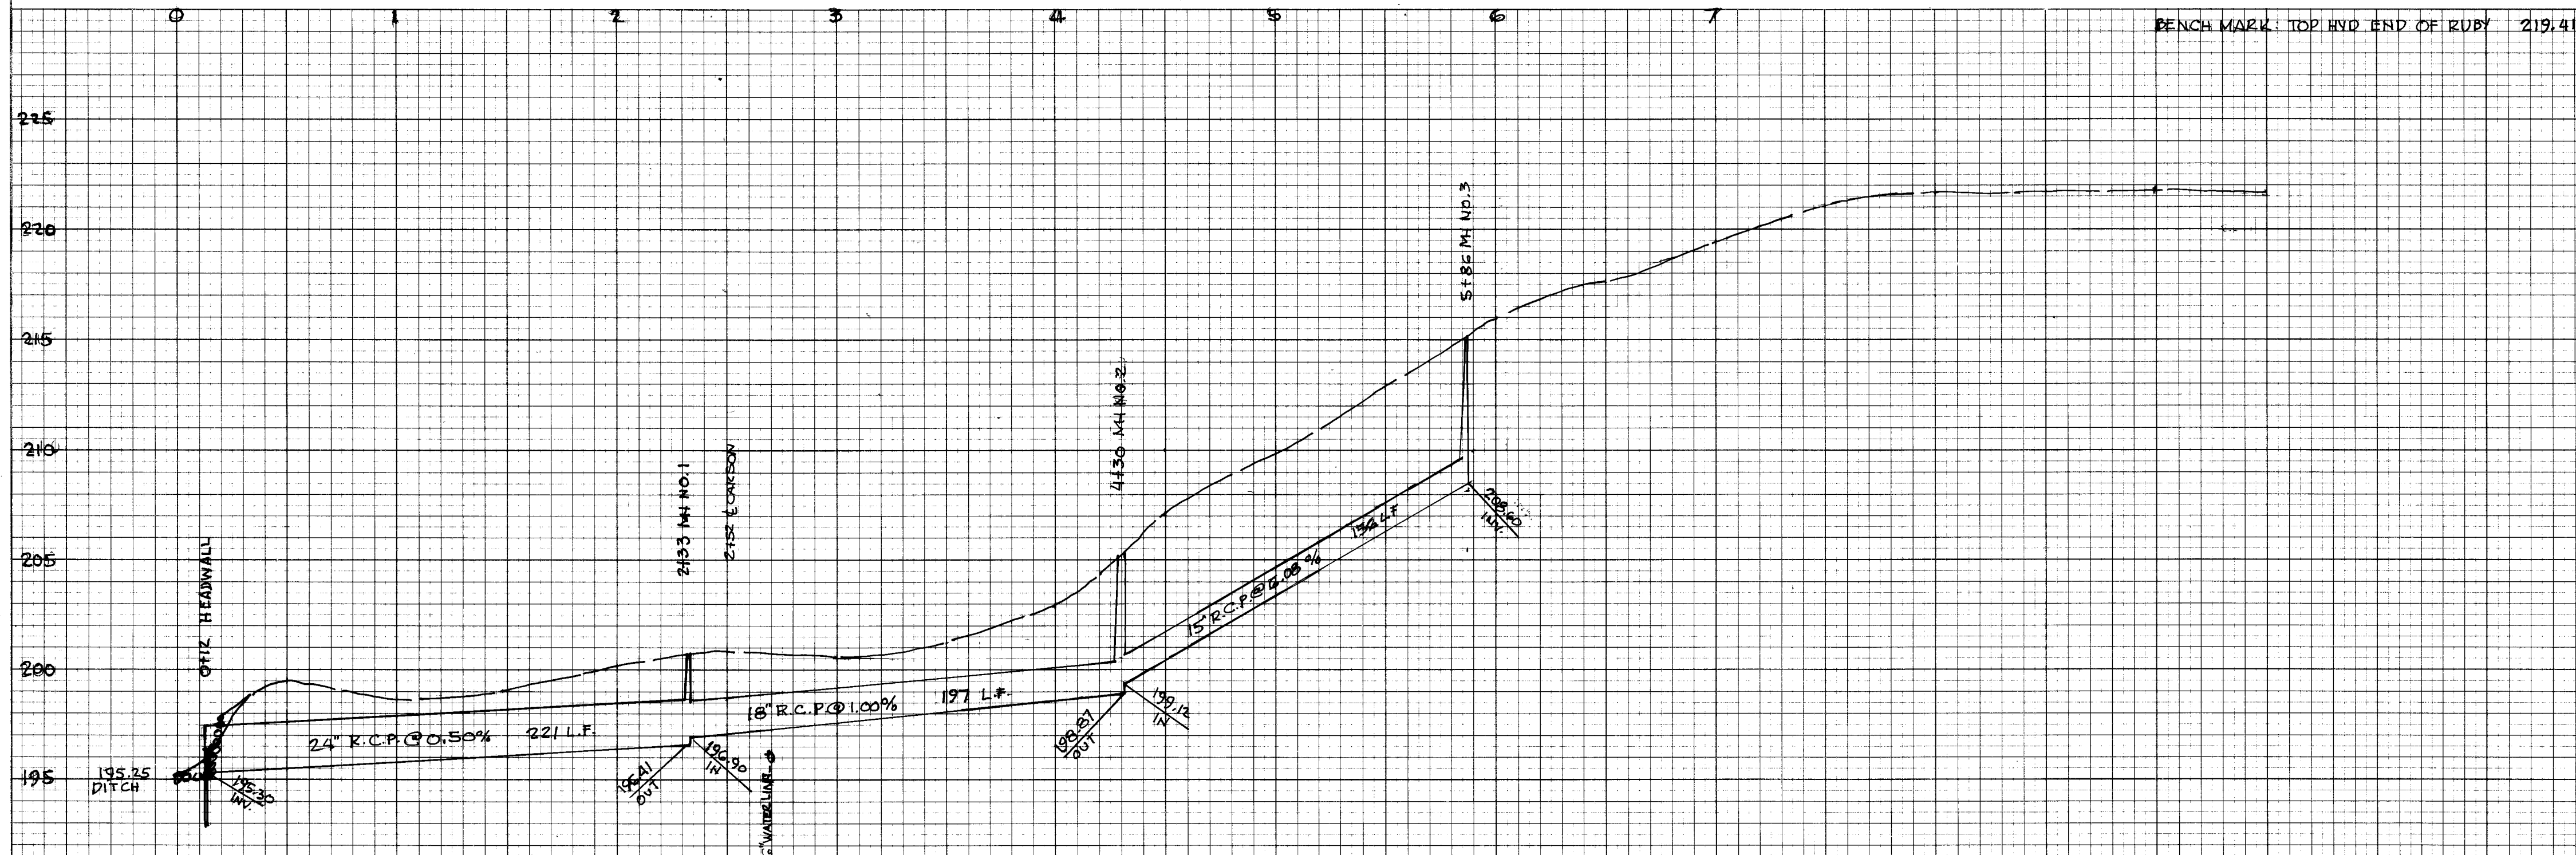

CITY OF MASSILLON, OHIO
**25' UNNAMED STREET
STORM SEWER**
WEST OF 32ND ST. NW. BETWEEN BROOKFIELD DITCH TO RUBY AVE NW
DRBY R.F. WAGNER
SCALE 1" = 50' HOR
1" = 5' VER
NOV. 1994
DEPARTMENT OF PUBLIC SERVICE
ENGINEERING DIVISION
ROBERT F. WAGNER, P.E.
CITY ENGINEER