


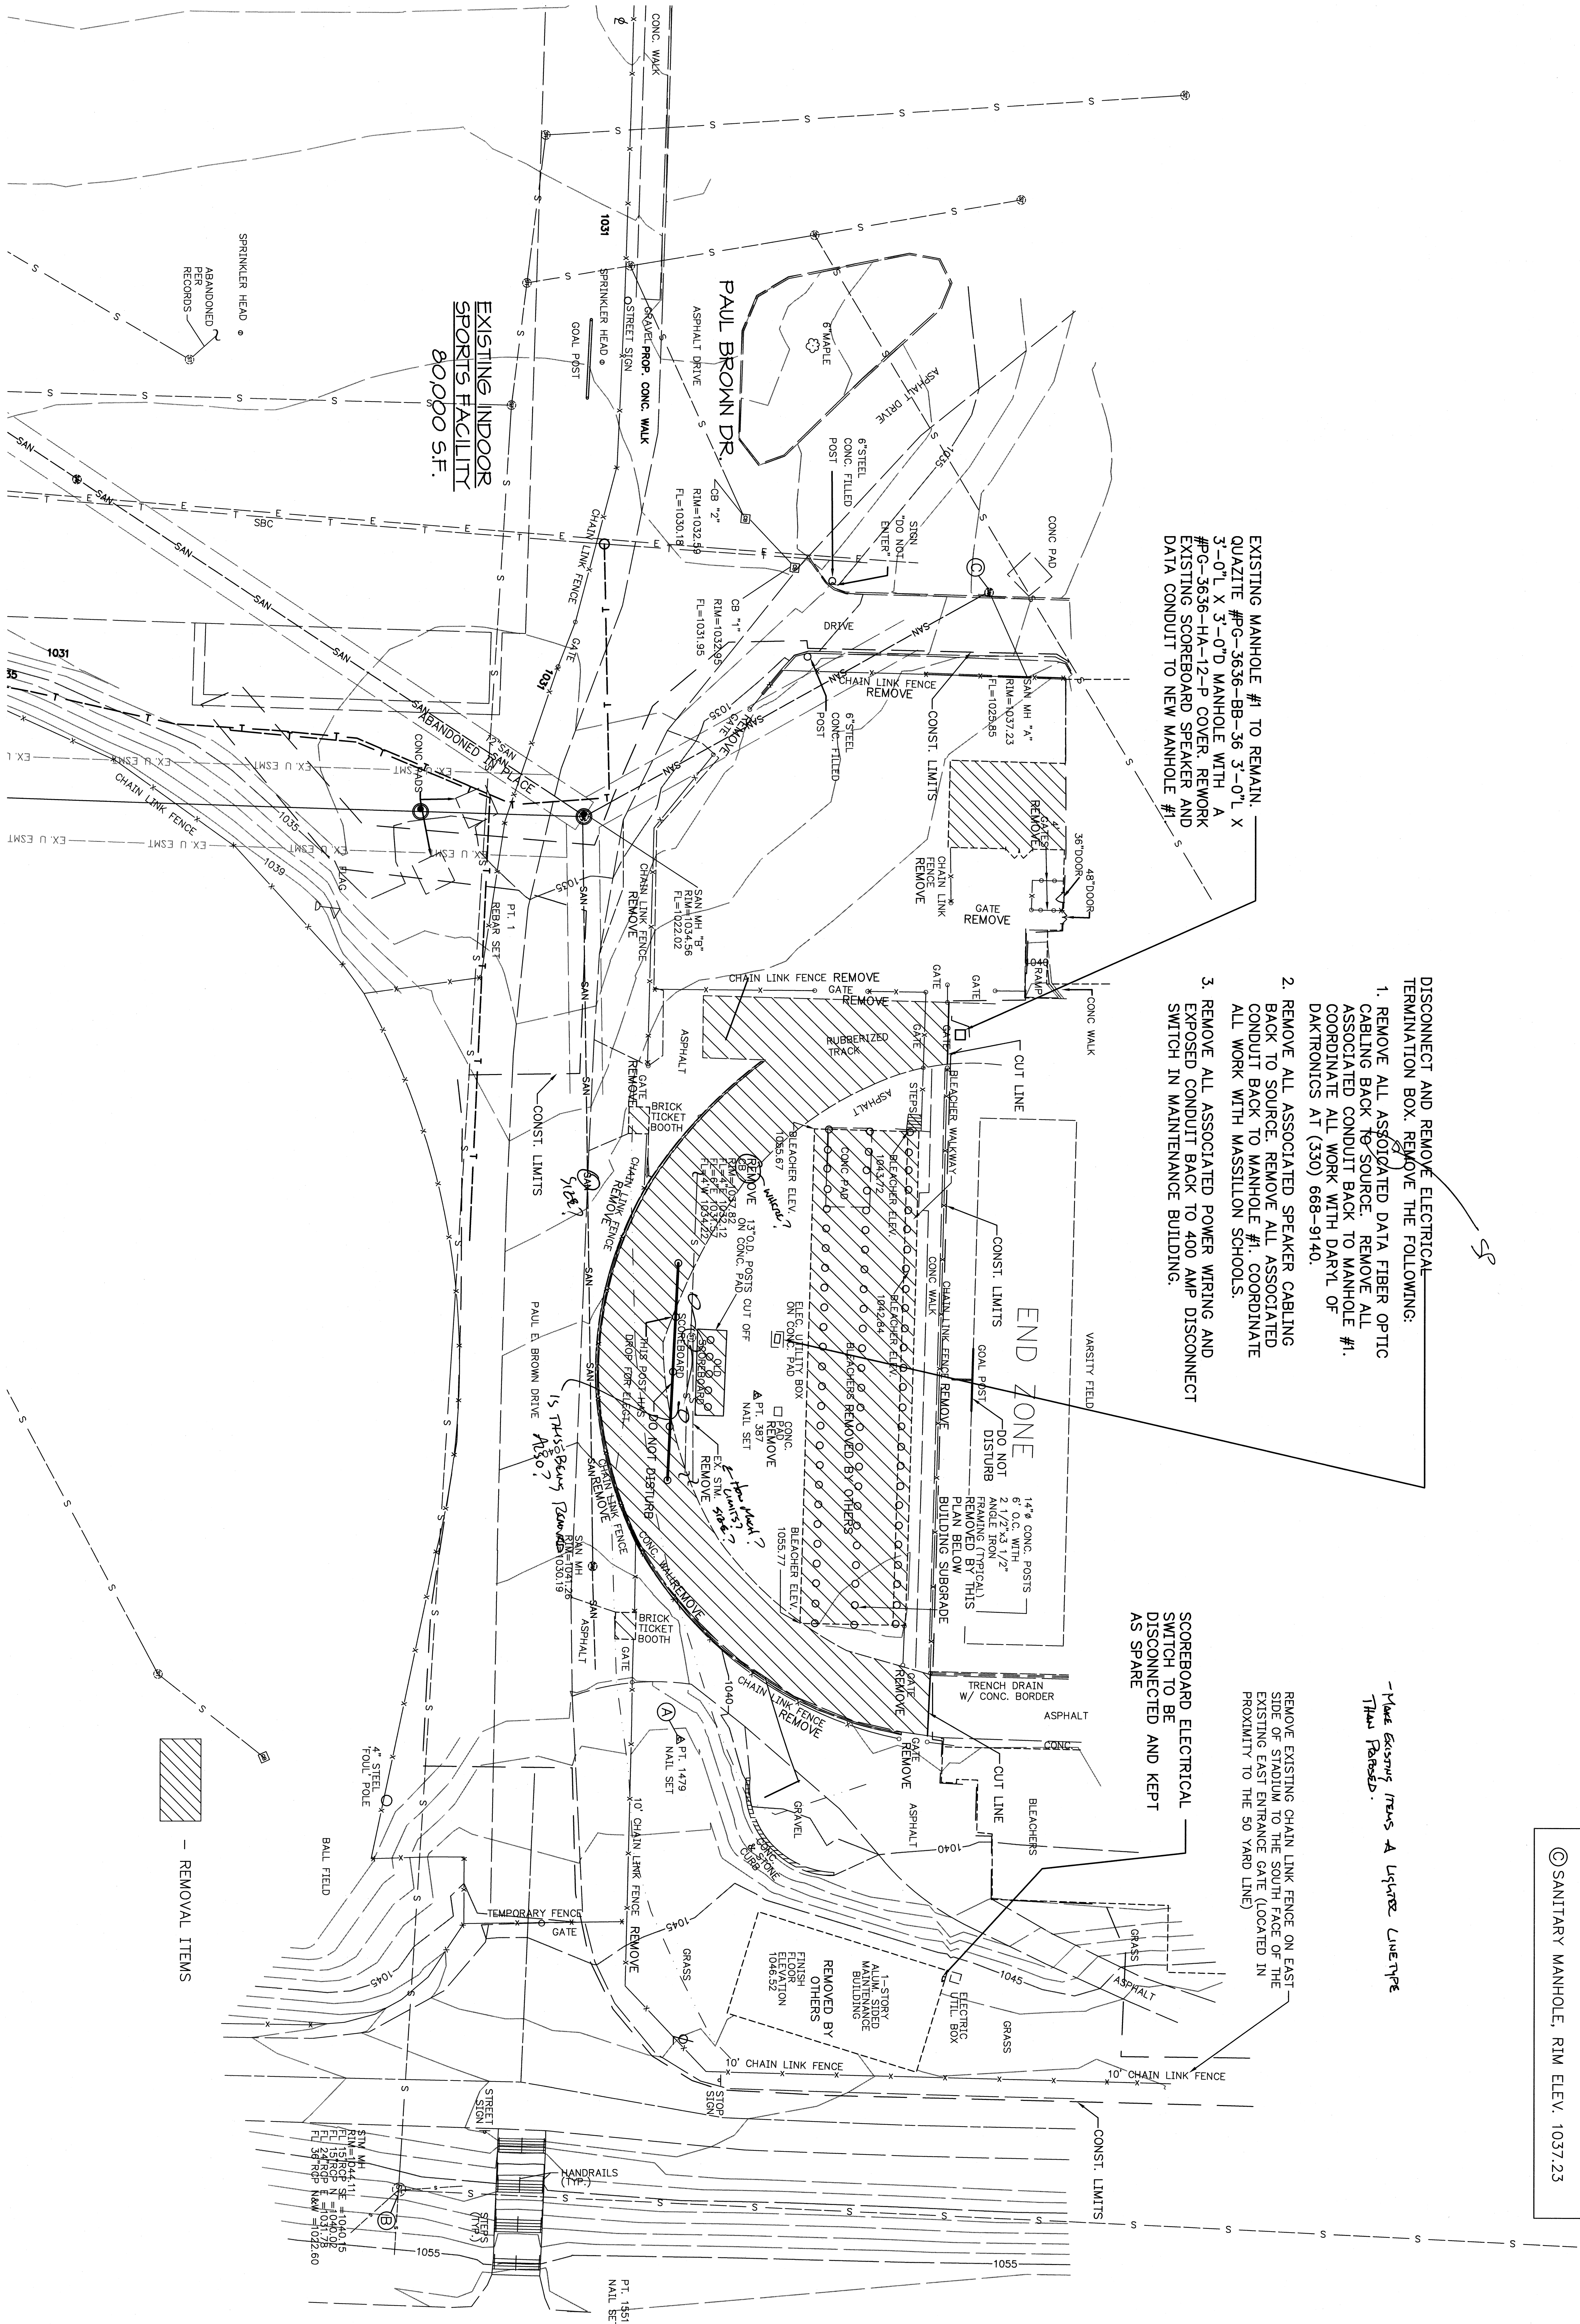

EXISTING MANHOLE #1 TO REMAIN.
QUAZITE #G-3636-BB-36 3'-0" L X
3'-0" L X 3'-0" D MANHOLE WITH A
#PG-3636-HA-12-P COVER. REWORK
EXISTING SCOREBOARD SPEAKER AND
DATA CONDUIT TO NEW MANHOLE #1

DISCONNECT AND REMOVE ELECTRICAL
TERMINATION BOX. REMOVE THE FOLLOWING:


1. REMOVE ALL ASSOCIATED DATA FIBER OPTIC
CABLING BACK TO SOURCE. REMOVE ALL
ASSOCIATED CONDUIT BACK TO MANHOLE #1.
COORDINATE ALL WORK WITH DARYL OF
DAKTRONICS AT (330) 688-9140.
2. REMOVE ALL ASSOCIATED SPEAKER CABLING
BACK TO SOURCE. REMOVE ALL ASSOCIATED
CONDUIT BACK TO MANHOLE #1. COORDINATE
ALL WORK WITH MASSILLON SCHOOLS.
3. REMOVE ALL ASSOCIATED POWER WIRING AND
EXPOSED CONDUIT BACK TO 400 AMP DISCONNECT
SWITCH IN MAINTENANCE BUILDING.

SCOREBOARD ELECTRICAL
SWITCH TO BE
DISCONNECTED AND KEPT
AS SPARE

REMOVE EXISTING CHAIN LINK FENCE ON EAST
SIDE OF STADIUM TO THE SOUTH FACE OF THE
EXISTING EAST ENTRANCE GATE (LOCATED IN
PROXIMITY TO THE 50 YARD LINE)

-Note Existing Mass. A Lighter Line type
than Proposed.

- BENCHMARKS
- A) NAIL SET ELEV. 1043.40
 - B) STORM MANHOLE, RIM ELEV. 1044.11
 - C) SANITARY MANHOLE, RIM ELEV. 1037.23

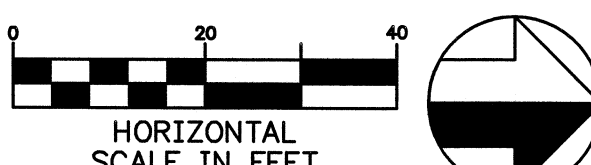

NOTE: ALL FOUNDATIONS FOR BUILDINGS
THAT ARE TO BE REMOVED UNDER THIS
CONTRACT ARE TO BE REMOVED AS PART
OF THE BUILDING DEMOLITION.

MOTTER & MEADOWS
ARCHITECTS

600 MARKET AVENUE NORTH CANTON OHIO 44702

NEW MASSILLON ALUMNI SPORTS MEDICINE COMPLEX
PAUL BROWN TIGER STADIUM

PREPARED FOR:
Paul & Carol David
FOUNDATION

300 SPRING STREET, SUITE 200
CANTON, OHIO 44702
TEL: (330) 246-1000
FAX: (330) 246-1001

DESIGN ARCHITECT:

MCCOY
ASSOCIATES,
INC.
CONSULTING ENGINEERS
300 SPRING STREET, SUITE 200
CANTON, OHIO 44702
TEL: (330) 246-1000
FAX: (330) 246-1001

REVISIONS:

THIS DWG :
REMOVAL PLAN

CONV 0704
DATE

DWG
C1.1