
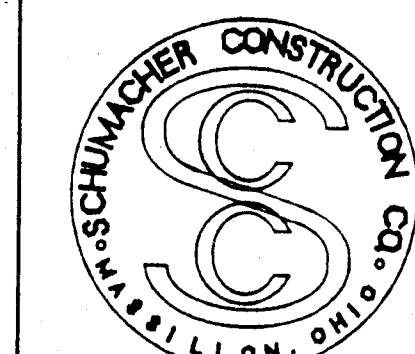


GOODENBERGER
CLANCY

* ARCHITECTS

125 VALLEYVIEW AVE. N.W.
CANTON, OHIO 44705
330 477 6247 FAX 477 6285

COPYRIGHT © 1998
L/D DESIGN GROUP INC.

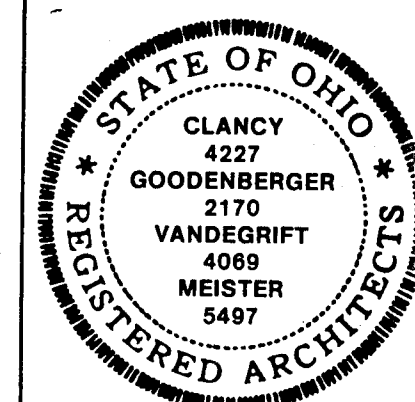

412 LAKE AVE NE - P.O. BOX 100
MASSILLON, OHIO 44840
TELEPHONE (330) 833-8387
FAX (330) 833-3740

1998020 JOB NO.
DRAWN
CHECKED
JOB CAP.
10-21-98 DATE

MARTIN PALLET COMPANY
1414 INDUSTRIAL AVE. S.W.
MASSILLON, OHIO

2.1

GENERAL NOTES

1. The Grading Contractor shall field-verify that the Grading Plan shown is accurate prior to grading operations. Should the Grading Plan not balance, soil may be obtained or wasted on site as needed with prior permission of the General Contractor and Owner.
2. Grading Contractor shall provide positive drainage around building to existing retention pond.
3. Grading Contractor to verify that slope at overhead door to maintenance is such that tractor-trailers do not hit head of door while backing into building.
4. See Sheet 1.1 for Alternate No. 1 to add 15' wide drive around building.

