



PERMANENT MEASURE


GRADING - SESC NOTES

- 1. MATCH EXISTING GRADES AROUND PERIMETER WITH SLOPES AS SHOWN.
- ALL SPOT ELEVATIONS ARE TOP OF PAVEMENT GRADES AT EDGE OF METAL (EOM) UNLESS OTHERWISE NOTED.
- ALL SOIL EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO MASS GRADING.
- ALL EXCAVATION AND SITE PREPARATION SHALL BE IN ACCORDANCE WITH THE GEOTECHNICAL ENGINEERING REPORT, PSI PROJECT NO. 0145687 ISSUED 11/05/2013.
- ALL EXISTING ELEVATIONS ARE TO BE VERIFIED AND ACCEPTED AS SHOWN PRIOR TO COMMENCEMENT OF WORK.
- CONTRACTOR SHALL TAKE PRECAUTIONS TO AVOID TRACKING SOIL ONTO ADJACENT ROADWAYS. SCRAPE ROAD AT THE END OF EACH WORKDAY AND SWEEP AT LEAST ONCE A WEEK.
- ANY DISTURBED AREA THAT WILL BE LEFT UNWORKED 5 DAYS OR LONGER MUST BE SEEDED AND MULCHED OR SODDED TO ESTABLISH VECETATION FOR TEMPORARY STABILIZATION. BASINS TO BE SEEDED AND MULCH BLANKETS APPLIED IMMEDIATELY TO PROVIDE A STABLE BASE AND AVOID EXCESSIVE EROSION.
- STRAW MULCH BLANKETS SHALL BE USED ON 3:1 SLOPES OR GREATER. ALL SLOPES ON SITE SHALL BE 4:1 OR LESS, UNLESS OTHERWISE DIRECTED BY ENGINEER.
- ROAD RIGHTS-OF-WAY MUST BE STABILIZED WITH SEED AND MULCH WITHIN 5 DAYS OF COMPLETING UTILITY WORK IN THE RIGHT-OF-WAY.
- AREAS OF EARTH CHANGE THAT ARE DISTURBED BEYOND THE FALL SEEDING DEADLINE (NOV. 1) MUST BE TEMPORARILY STABILIZED WITH A MINIMUM OF STRAW MULCH SECURELY CRIMPED TO THE GROUND.
- ACCUMULATED SEDIMENT TO BE REMOVED FROM STORM SYSTEM UPON COMPLETION OF CONSTRUCTION. ALL TEMPORARY CONTROLS TO BE REMOVED AFTER SITE IS STABILIZED AND VEGETATION ESTABLISHED.

BENCHMARKS

BM # 1 ELEVATION = 1073.68 TOP NUT ON HYDRANT

BM # 2 ELEVATION = 1072.40 TOP NUT ON HYDRANT

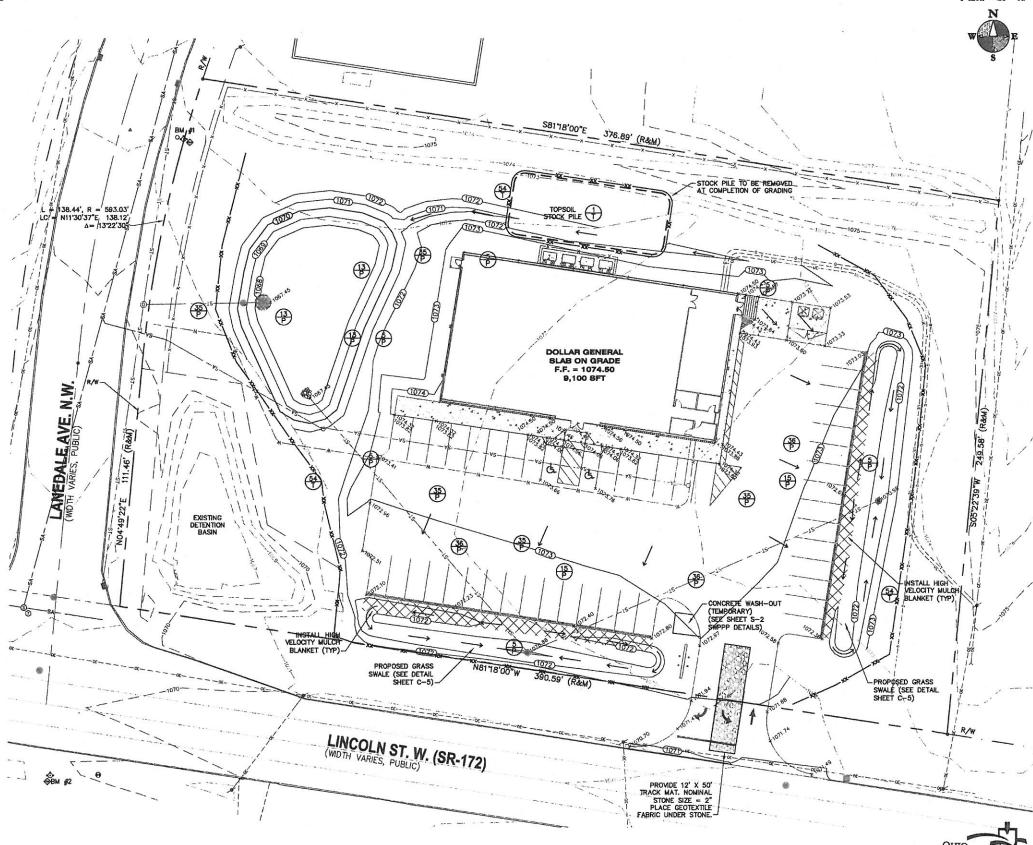



ALL UTILITIES AS SHOWN ARE APPROXIMATE LOCATIONS DERIVED FROM ACTUAL MEASUREMENTS AND AVAILABLE RECORDS. THEY SHOULD NOT BE INTERPRETED TO BE EXACT LOCATION NOR SHOULD IT BE ASSUMED THAT THEY ARE THE CONJUNUTIES IN THE AREA. FIELD WORK PERFORMED BY. LANDTECH PROFESSIONAL SURVEYING

Utilities Protection SERVICE

> 3/11/14 Sheet **C-4**

Proje

hurley & stewart, lic 2800 south 11th street Kalamazoo, michigan 49009 288,552,4860 tax 288,552,4961 www.hurleystewart.com

SIE

500343)

(PARCEL

HO


GENERAL


DOLLAR


PLAN

GRADING-SESC RAL - MASSILLON, (BUCHALTER

GROWTH

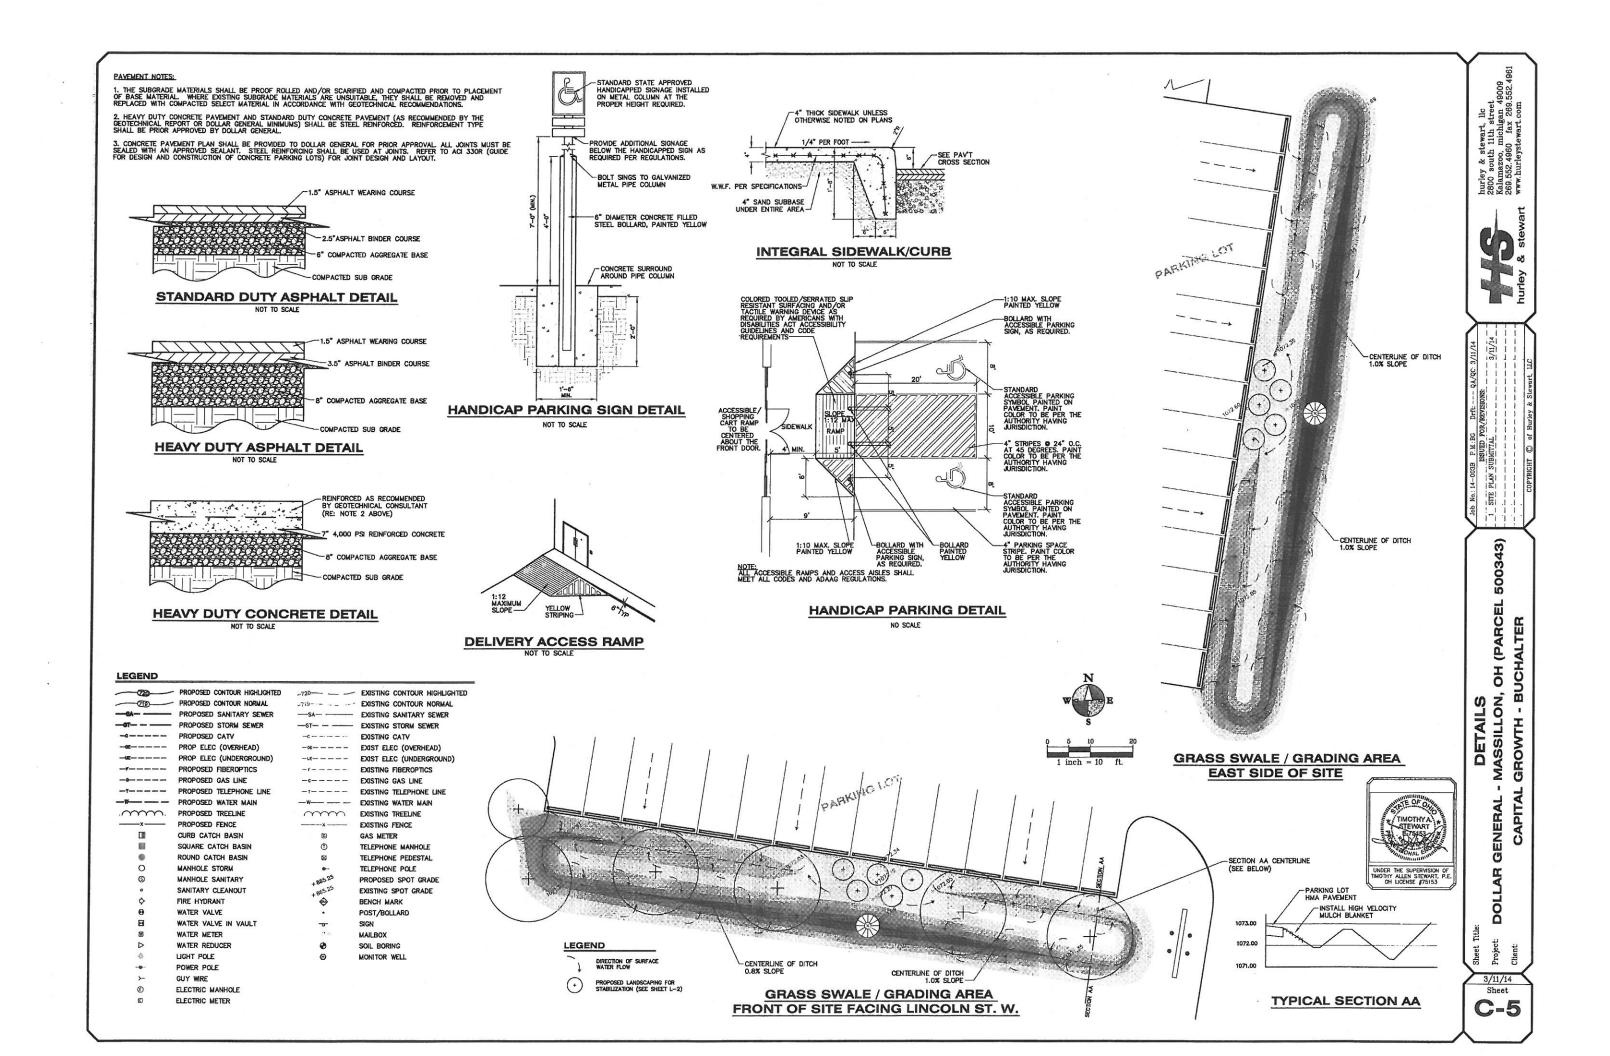

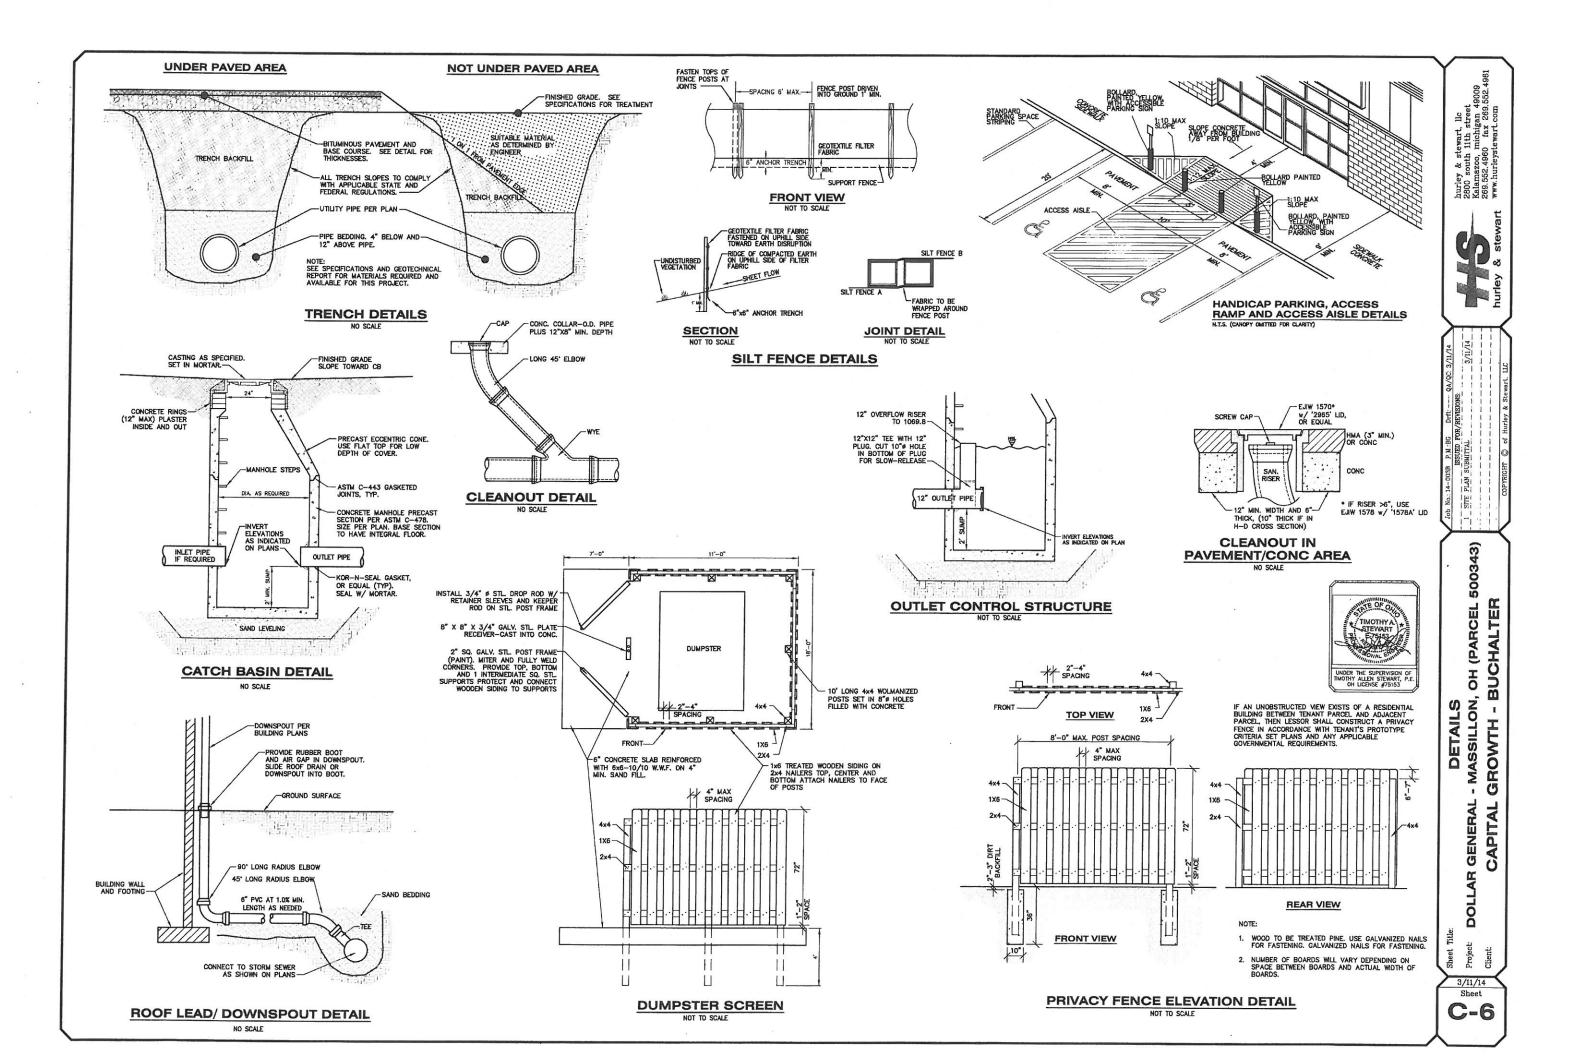

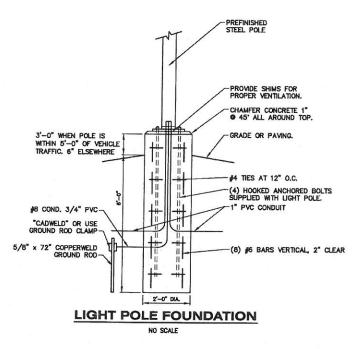

| Label | Fix. Ht. | Orient | Till |
|--------------------------|----------|--------|------|
| Canopy Ships | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| Canopy Strips | 10 | 0 | 0 |
| MFHID-WPF-400PMH | 12 | 0 | 0 |
| MFHID-WPF-400PMH | 12 | 0 | 10 |
| MFHID-WPF-400PMH | 12 | 0 | 0 |
| MFHID-WPF-50PMH 12in | 12 | 180 | 0 |
| MFHID-PLL-400MH SBL TWIN | 25 | 90 | 0 |
| MFHID-PLL-400MH SBL Twin | 25 | 90 | 0 |
| MFHID-PLL-400MH SBL Twin | 25 | 180 | 0 |
| MFHID-WPF-400PMH | 16.5 | 270 | 0 |
| MEHID-WPE-400PMH | 16.5 | 270 | 0 |

LIGHTING PLAN BY:



Harris Lighting 4035 Reynolds Blvd. Green Cove Springs, FL 32043 PH: 904-284-1220

UTILITY NOTES

- PROVIDE 1" BURRIED CONDUIT FROM ELECTRICAL PANEL TO LOCATION OF THE SIGN BASE, A TEMPORARY 3' TALL STAKE SHALL BE PROVIDED AT THE SIGN LOCATION UNTIL THE SIGN IS PERMANENTLY INSTALLED.
- 2. UNDERGROUND ELECTRICAL SHALL BE PROVIDED TO THE SITE LIGHT POLES.

| Label | CalcType | Units | Avg | Max | Min |
|---------------------|-------------|-------|------|------|-----|
| Parking Lot CalcPts | Illuminance | Fc | 7.46 | 43.4 | 0.7 |
| Site CalcPts | Illuminance | Fc | 0.55 | 12.9 | 0.0 |

b.o b.o b.o b.o b.o b.o b.o b.a 1.4 1.0 b.o b.o b.o b.o b.o b.o b.o 1.o 1.o b.o b.o b.o b.o b.o b.o b.o b.a b.s

b.o b.o b.o b.o b.o b.o b.o b.1 b.1 b.1

b.o b.o

\$.e \$5.1 \$0.2 \$5.5 \$.e \$1.9

b.o b.1 b.2 b.4 b.8 b.9 1.5 2.9 4.2 4.7 6.4 7.1 5.2 4.3 3.5 2.0 1.4 1.2 1.0 1.0 1.4 1.2 2.9 5.4

\$.2 \$0.1 \$0.9 \$.8 \$.4 \$.6 \$.3 \$.7 \$.7 \$.0 \$.5 \$.2 \$.5

\$.3 \$2.5 \$7.0 \$2.7 \$.3 \$.2 \$.7 \$4.9 \$5.1 \$5.3 \$.3 \$.7 \$2.5 \$7.0 \$2.2 \$5.5 \$.0 \$5.7 \$8.4 \$5.9

3.5 7.3 8.0 7.5 8.1 2.9 3.5 8.8 8.0 3.8 2.9 3.9 7.6 8.3 8.2 8.2 3.7 8.1 3.9 8.9 1.9 2.5 2.8 2.7 2.3 1.9 1.8 2.4 3.0 2.7 2.1 2.5 3.1 3.4 3.2 3.1 2.8 2.6 2.6 3.3 1 1.5 1.8 1.7 1.9 1.7 1.5 1.5 2.4 3.1 2.6 2.0 2.7 3.8 3.4 3.2 3.5 3.9 3.1 2.6 2.8

\$.9 \$.8 \$.0 \$.8 \$.2 \$.7 \$.6 \$.8 \$.5 \$.1 \$.3 \$.9 \$.6 \$.6 \$.2 \$.8 \$.7 \$.3 \$.5 \$.2 \$.5 \$. \$.0 \$.3 \$.1 \$.4 \$.1 \$.8 \$.5 \$.0 \$.2 \$.7 \$.1 \$.7 \$.0 \$.1 \$1.3 \$.7 \$0.0 \$1.7 \$.3 \$.0 \$.6 \$2.9

b.o b.o b.o b.o b.o b.o b.o b.o b.o

b.o b.o b.o b.o b.o b.1 b.1 b.4

b.o b.o b.o b.1 b.1 b.1 b.2 b.5

b.o b.o b.1 b.1 b.2 b.2 b.3 b.5

b.o b.o b.1 b.2 b.3 b.4 b.3

| Qty | Part Number | Description |
|-----|------------------|--|
| 5 | MFHID-WPF-400MH | 400W Full Cutoff Wall Packs |
| 1 | MFHID-WPF-50PMH | 50W Full Cutoff Wall Packs |
| 6 | MFHID-PLL-400MH | 400W Parking Lot Lighting ***NOTE: DO NOT tilt fixtures up, keep at 0 degree horizontal plane. |
| 3 | HW-F188A | 25' Parking Lot Pole |
| 3 | HW-HID-PLL-MB | Twin Tenon Mounting Bracket |
| 6 | HW-HID-PLL-SBL16 | 16" Housing Backlight Shield |

| Symbol | Oty | Label | Description | Arrangement | Lumens | LLF |
|--------|-----|--------------------------|---------------------------------------|-------------|--------|-------|
| | 5 | MFHID-WPF-400PMH | 400W Full Cutoff Wall Pack | SINGLE | 44000 | 0.720 |
| 1 2 | 7 | Canopy Strips | Strip | SINGLE | 2900 | 0.940 |
| k | 3 | MFHID-PLL-400MH SBL Twin | Twin 400W Parking Lot Lighting w. SBL | TWIN | 40000 | 0.720 |
| E | 1 | MFHID-WPF-50PMH 12in | 50W Full Cutoff Wall Pack | SINGLE | 3400 | 0.720 |

28.4 15.1 3.9 1.

28.3 \$s.2 \$.7 \$.0 \$.7 \$. \$2.5 14.8 \$.8 \$.2 - \$.7 - \$.

26.8 16.7 8.5 10.4 8.1 8.

40.2 13.7 8.1 5.4 \$.5 12.4

MERID-NPF-400PMR
5. 49: \$ 20.1 15.9 21.4 12.6 7.9 3.5 12.5 3.6

10.6 20.6 \$.9 7.6 \$.6 2.9

SITE

b.0 b.0

p.o b.o

OH (PARCEL 500343) BUCHALTER PLAN LIGHTNING PL AL - MASSILLON, (1 GROWTH

Utilities Protection SERVICE


ALL UTILITIES AS SHOWN ARE APPROXIMATE LOCATIONS DERIVED FROM ACTUAL MEASUREMENTS AND AVAILABLE RECORDS. THEY SHOULD NOT BE INTERPRETED TO BE EXACT LOCATION NOT SHOULD IT BE ASSUMED THAT THEY ARE THE ONLY UTILITIES IN THE AREA. FIELD WORK PERFORMED BY: LANDTECH PROFESSIONAL SURVEYING


3/11/14 L-1

GENERAL CAPITAL DOLLAR

Title Sheet Til Project: Client:

Sheet

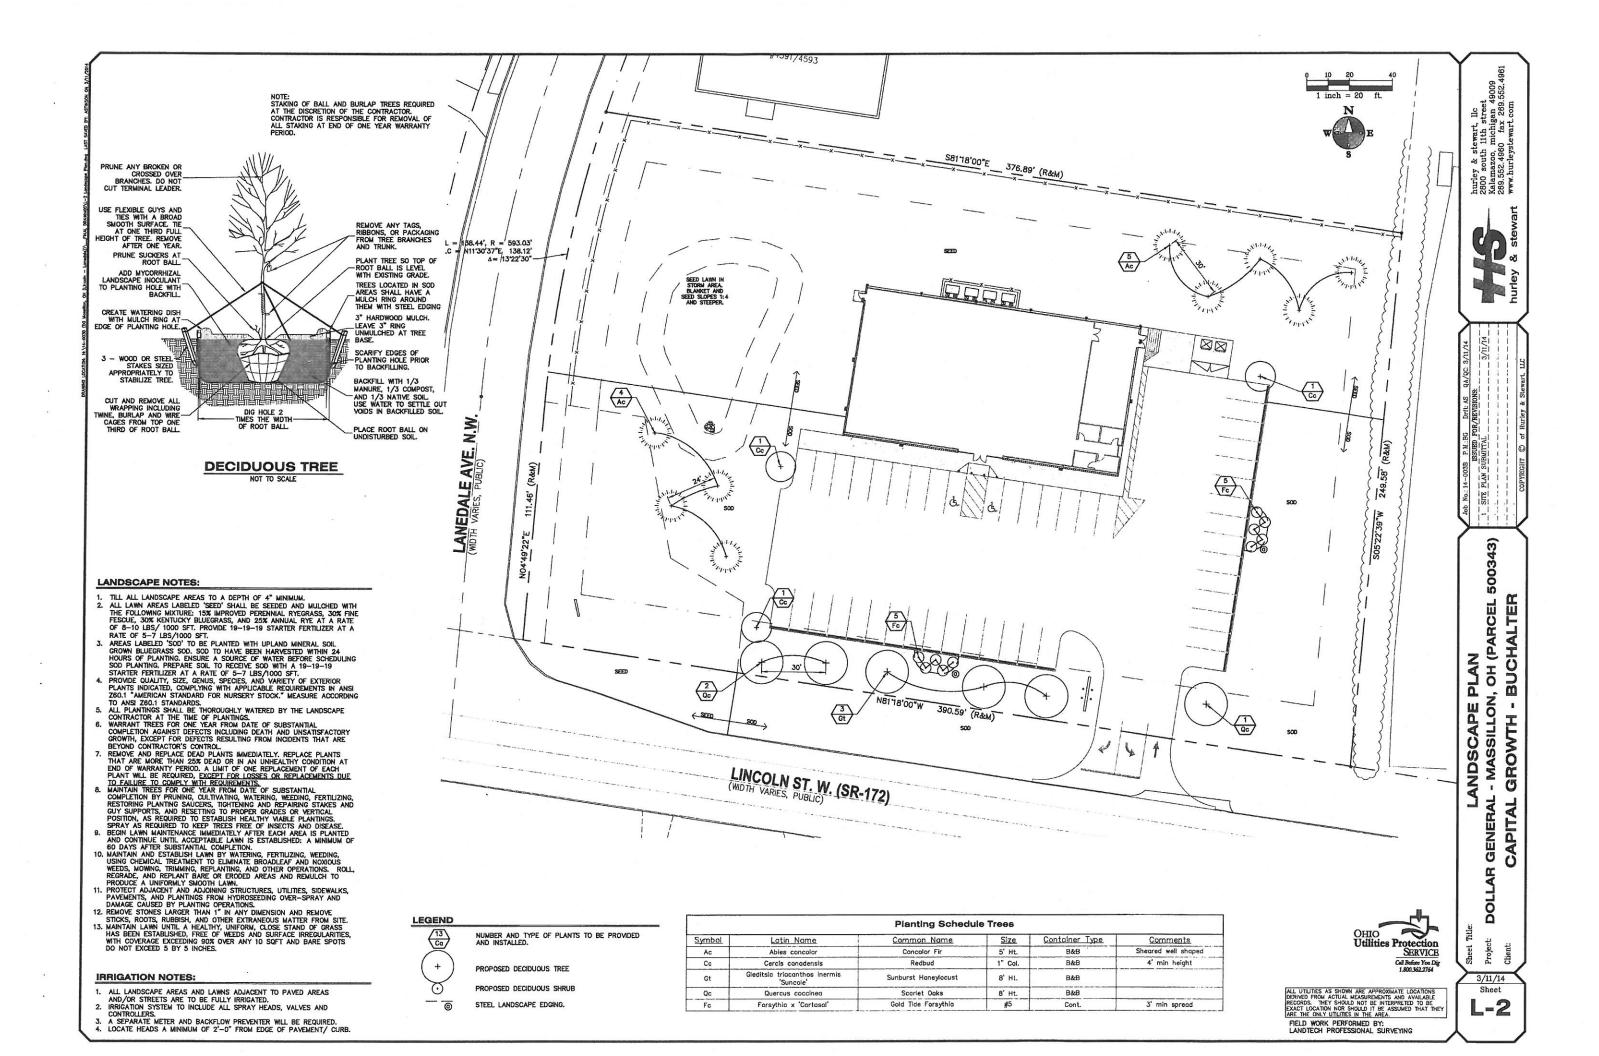

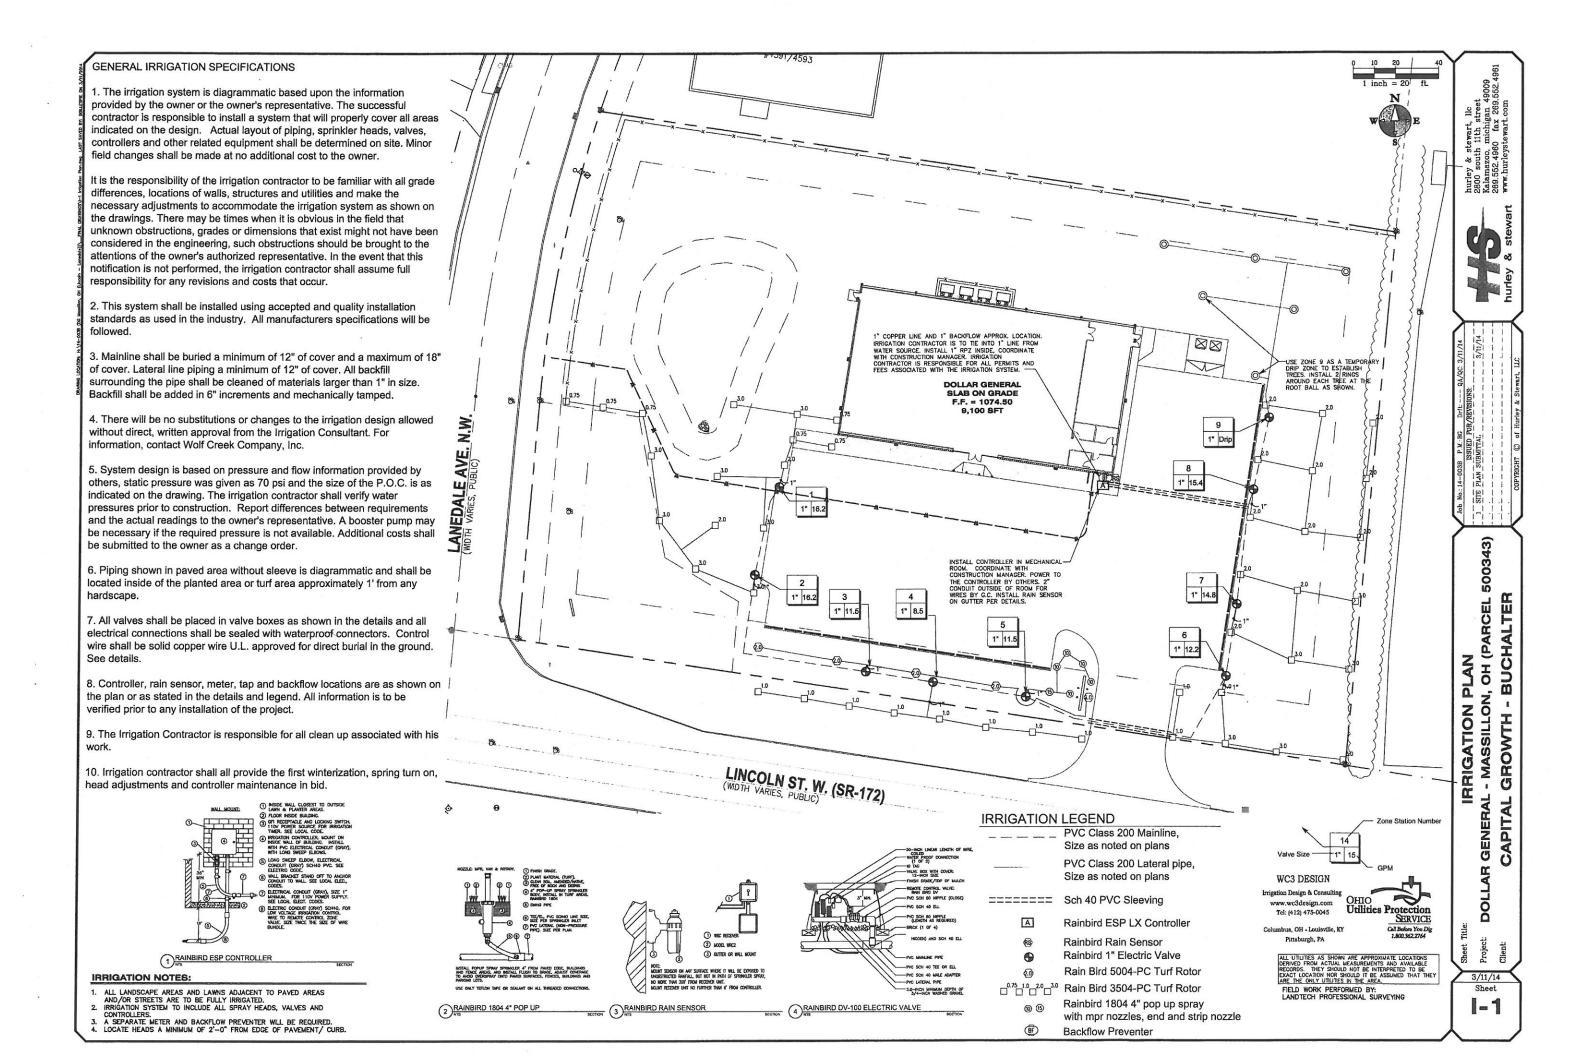



1 inch = 20 ft.

TOTAL DISTURBED AREA: 1.72 ACRES



- ALL SPOT ELEVATIONS ARE TOP OF PAVEMENT GRADES AT EDGE OF METAL (EOM) UNLESS OTHERWISE NOTED.
- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE APPROVED SOIL EROSION CONTROL PLAN AND THE PERMIT AS ISSUED BY STARK COUNTY. SOIL EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO MASS GRADING.
- ALL EXCAVATION AND SITE PREPARATION SHALL BE IN ACCORDANCE WITH THE GEOTECHNICAL ENGINEERING REPORT, TERRACON PROJECT NO. N4125110 ISSUED JULY 26, 2012.

- ACCUMULATED SEDIMENT TO BE REMOVED FROM STORM SYSTEM UPON COMPLETION OF CONSTRUCTION, ALL TEMPORARY CONTROLS TO BE REMOVED AFTER SITE IS STABILIZED AND VEGETATION ESTABLISHED. DETENTION.
- 12. SEE SHEET L-1 FOR PERMANENT AND TEMPORARY SEEDING NOTES.
- 13. SEE SHEET L-1 FOR BEST MANAGEMENT PRACTICES AND CONSTRUCTION SEQUENCE SCHEDULE.
- THE CONTRACTOR SHALL PREVENT AND/OR REDUCE AND CONTROL SOIL EROSION RESULTING FROM THE PROPOSED IMPROVEMENTS. THE USE OF SILT FENCING, JUTE MATTING, TEMPORARY SEEDING, SILT CHECKS, INLET PROTECTION AROUND ALL CATCH BASINS, STABILIZED CONSTRUCTION ENTRANCE(S), ETC. WILL BE INLET PROTECTION AROUND ALL CATCH BASINS, STABILIZED CONSTRUCTION ENTRANCE(S), ETC. WILL BE REQUIRED, SEDIMENT CONTROL STRUCTURES/DEVICES SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF THE MANUAL RAINWAITER AND LAND DEVELOPMENT — OHIO'S STANDARDS FOR STORM WATER MANAGEMENT, LAND DEVELOPMENT AND LIRAN STREAM PROTECTION. SEDIMENT CONTROL DEVICES MUST BE INSTALLED PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTINUED INSPECTION AND MAINTENANCE OF ALL SEDIMENT CONTROL DEVICES. THE CONTRACTOR SHALL FOLLOW THE REQUIREMENTS SET FORTH ON THE APPROVED STORM WATER POLLUTION PREVENTION PLAN IF APPLICABLE, OR AS DETAILED ON THE CONSTRUCTION PLANS, AS SPECIFIED BY THE CITY OF MASSILLON.

| STR. # | RIM EL. | DIAM. | CASTING | PIPES IN: | PIPES OUT |
|--------|---------|-------|---------|-------------------------------------|-------------------|
| CB-1 | 1070.98 | 4' | 5105 M1 | | 12" SW: 1068.55 |
| CB-2 | 1070.88 | 4' | 5105 M1 | 12" NE: 1067.96 | 15" NW: 1067.96 |
| мн-5 | 1070.47 | 4' | 1120 B | 12" E: 1067.23 EX 12" N: 1067.23 | EX 12" S: 1067.23 |
| OS-3 | 1069.14 | 4' | 6508 | | 8" W: 1067.45 |
| OS-4 | 1069.45 | 4' | 6508 | 8" E: 1067.41 | 12" W: 1067,41 |

*SEE SHEET C-5 FOR OUTLET CONTROL STRUCTURE DETAILS

GRANULAR MATERIAL OR CDF SHALL BE USED FOR BACKFILLING ALL TRENCHES UNDER PAVEMENT AND/OR ANY PORTION OF THE TRENCH THAT IS WITHIN 5 FT. OF THE PAVEMENT EDGE OR CURB. PAVEMENT SHALL INCLUDE BUT IS NOT LIMITED TO; ROADWAYS, SIDEWALKS, SERVICE WALKS, DRIVEWAY APPROACHES, PARKING LOTS OR ANY PROPOSED PAVED SURFACE. DETAIL **CHARACTERISTICS**

SOIL EROSION AND SEDIMENTATION CONTROL MEASURES

PROVIDE 12' X 50'

STONE SIZE = 2

1

5 13 15 V as areas which cannot atherwise be as cled, but horresses in I value and while years are surface with help than solicity. Sistent removes to feeled runnif from any per subtry from prind one Contain the subset of subset of run.

Contain the subset of subset per septem or step and outlies local and Use subset of the subset of subset subset of step and outlies local and Use subset of subset of subset subset of subs 36 checks the velocity concentrated night. May use filter ciath over into See poved storm sever i let delait

Use protective and posts or prices
Way be constructed or preparaged
Fasy to construct and locate as neces

SWPPP NOTES

I, THE UNDERSIGNED, CERTIFY THAT I UNDERSTAND AND WILL ADHERE TO THE REQUIREMENTS, TERMS, AND CONDITIONS OF THE STORM WATER POLLUTION PREVENTION PLAN REVIEWED AND APPROVED BY THE STARK SOIL AND WATER DISTRICT FOR COMPLIANCE WITH THE STARK COUNTY WATER QUALITY REGULATIONS FOR THE ABOVE REFERENCED PROJECT.

SITE SOILS: SITE CLASSIFICATION "D"

GRADING - SESC NOTES

MATCH EXISTING GRADES AROUND PERIMETER WITH SLOPES AS SHOWN.

- ALL EXISTING ELEVATIONS ARE TO BE VERIFIED AND ACCEPTED AS SHOWN PRIOR TO COMMENCEMENT OF WORK
- CONTRACTOR SHALL TAKE PRECAUTIONS TO AVOID TRACKING SOIL ONTO ADJACENT ROADWAYS. SCRAPE ROAD AT THE END OF EACH WORKDAY AND SWEEP AT LEAST ONCE A WEEK.
- ANY DISTURBED AREA THAT WILL BE LEFT UNWORKED 5 DAYS OR LONGER MUST BE SEEDED AND MULCHED OR SODDED TO ESTABLISH VEGETATION FOR TEMPORARY STABILIZATION, BASINS TO BE SEEDED AND MULCH BLANKETS APPLIED IMMEDIATELY TO PROVIDE A STABLE BASE AND AVOID EXCESSIVE EROSION.
- STRAW MULCH BLANKETS SHALL BE USED ON 3:1 SLOPES OR GREATER. ALL SLOPES ON SITE SHALL BE 4:1 OR LESS, UNLESS OTHERWISE DIRECTED BY ENGINEER.
- ROAD RIGHTS-OF-WAY MUST BE STABILIZED WITH SEED AND MULCH WITHIN 5 DAYS OF COMPLETING UTILITY WORK IN THE RIGHT-OF-WAY.
- AREAS OF EARTH CHANGE THAT ARE DISTURBED BEYOND THE FALL SEEDING DEADLINE (NOV. 1) MUST BE TEMPORARILY STABILIZED WITH A MINIMUM OF STRAW MULCH SECURELY CRIMPED TO THE GROUND.

THE OVERALL SEDIMENT AND EROSION CONTROL SCHEME IS DEVISED TO PREVENT POLLUTED RUNOFF FROM LEAVING THE SITE BOUNDARIES OR ENTERING THE EXISTING STORM SYSTEM DURING CONSTRUCTION, SILT FENCE IS IMPLEMENTED AT ALL CONSTRUCTION PERIMETERS AND THE TOPSOIL STOCK PILE AREA.

WATER QUALITY WILL BE ADDRESSED THROUGH THE INSTALLATION OF ADS FLEXSTORM INLET FILTERS.

DATE

17. IF ANY ERRORS, DISCREPANCIES, OR OMISSIONS BECOME APPARENT, THESE SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO CONSTRUCTION OF ANYTHING AFFECTED SO THAT CLARIFICATION OR REDESIGN MAY OCCUR. ADS FLEXSTORM INLET FILTERS ARE TO BE INSTALLED IN EACH CATCH BASIN WITHIN THE PARKING AREA. COORDINATE FILTER MODEL AND INSTALLATION METHOD WITH MANUFACTURER

16. CONTRACTOR SHALL REFER TO THE GEOTECHNICAL REPORT FOR GROUNDWATER AND SOILS INFORMATION. ANY UTILITIES REQUIRING DEWATERING SHALL BE INSTALLED TO STARK COUNTY STANDARDS AND INCLUDED IN THE INSTALLATION COSTS. CONTRACTOR IS RESPONSIBLE FOR ALL DEWATERING NECESSARY TO CONSTRUCT UTILITIES IN THE DRY.

ALL MATERIAL AND CONSTRUCTION WILL BE IN ACCORDANCE WITH THE CONSTRUCTION STANDARDS AND SPECIFICATIONS OF THE STATE OF OHIO DEPARTMENT OF TRANSPORTATION (ODOT) DATED JANUARY 1,2010. ODOT SPECIFICATIONS ARE SUBJECT TO THE CURRENT ADDENDA. IN ADDITION, ALL WORK WILL BE IN COMPLIANCE WITH ALL APPLICABLE FEDERAL AND STATE STANDARDS AND REGULATIONS.

SOIL EROSION AND SEDIMENTATION BEST MANAGEMENT PRACTICE (BMP) MEASURES WILL BE INSTALLED PRIOR TO START OF ANY CONSTRUCTION AND WILL BE MAINTAINED AT ALL TIMES UNTIL CONSTRUCTION HAS BEEN COMPLETED, INCLUDING ALL GRASS BEING WELL ESTABLISHED AND/OR PERMANENT EROSION AND SEDIMENTATION BMP MEASURES ARE IN PLACE.

10. SANITARY SEWER MATERIALS AND INSTALLATION SHALL COMPLY WITH THE OHIO EPA AND STARK COUNTY REQUIREMENTS. COORDINATE WORK AND INSPECTIONS WITH THE OHIO EPA AND STARK COUNTY.

CONTRACTOR IS TO DESIGNATE A SITE DUMP/WASH AREA PRIOR TO STARTING CONSTRUCTION FOR SUCH PURPOSES AS WASHING OUT CONCRETE TRUCKS AND DUMPING NON-HAZARDOUS WASTE MATERIALS. DUMPING OR DISCHARGE OF ANY WASTE MATERIALS TO ANY SEWERS IS PROHIBITED, HAZARDOUS WASTES ARE TO BE REMOVED OFF SITE AND PROPERLY DISPOSED OF CONSISTENT WITH ALL FEDERAL, STATE AND LOCAL REGULATIONS.

Δ= /13'22'30

MOTH VARIES, PUBLIC)

P

(13)

M

FOR PROTECTION OF UNDERGROUND UTILITIES, CALL THE OHIO UTILITIES PROTECTION SERVICE AT 1-800-362-2764 A MINIMUM OF 48 HOURS PRIOR TO EXCAVATING.

8. COORDINATE ALL UTILITY LOCATIONS AND ELEVATIONS WITH MECHANICAL DRAWINGS AND BUILDING CONTRACTOR PRIOR TO INSTALLATION.

14. ALL STRUCTURE CASTINGS TO BE EAST JORDAN IRON WORKS OR APPROVED EQUAL. SEE STRUCTURE TABLE FOR SPECIFIC CASTING AT EACH STRUCTURE.

REMOVE SEDIMENT FROM ALL STRUCTURES ONCE PAYING IS COMPLETE AND REMOVE SILT SACKS.

12. CONTRACTOR TO COORDINATE PRIVATE UTILITY CONNECTIONS WITH UTILITY COMPANIES.

13. PLACE SANITARY CLEANOUT EVERY 100' AND/OR AT BENDS ON ALL 8" SANITARY SEWER LEADS.

WATER SUPPLY MATERIALS AND INSTALLATION SHALL COMPLY WITH THE OHIO EPA REQUIREMENTS AND SPECIFICATIONS.

15. THE CONTRACTOR SHALL INSTALL PEDESTRIAN FENCE AROUND ALL EXCAVATIONS TO BE LEFT OPEN OVERNIGHT AS REQUIRED.

ALL BEDDING MATERIAL TYPES ARE TO BE PER ODOT SPEC. 803.06.

ALL BACKFILL MATERIAL TYPES ARE TO BE PER ODOT SPEC. 603.10.

1

S8178'00"E

TOPSOIL 1

____X___X___

DOLLAR GENERAL

SLAB ON GRADE F.F. = 1074.50 9,100 SFT

4

AREA OF DISTURBANCE

0

図図

PLAN SITE SWPPP

> ō

50

OH

MASSILL

Ü

BUCHALTER

E E

CAPITAL


4/22/13

Sheet **S-1** **GRASSED SWALE DETAIL** NO SCALE

GRASSED SWALE: OPERATION & MAINTENANCE


- ALL TREES, BRUSH, STUMPS, AND OTHER UNSUITABLE MATERIAL SHALL BE REMOVED FROM THE SITE.
- THE CHANNEL SHALL BE EXCAVATED AND SHAPED TO THE PROPER GRADE AND CROSS SECTION.
- FILL MATERIAL USED IN THE CONSTRUCTION OF THE CHANNEL SHALL BE WELL COMPACTED IN UNIFORM LAYERS NOT EXCEEDING 9 INCHES USING THE WHEEL TREADS OR TRACKS OF THE CONSTRUCTION EQUIPMENT TO PREVENT UNEQUAL SETTLEMENT.
- EXCESS EARTH SHALL BE GRADED OR DISPOSED OF SO THAT IT WILL NOT RESTRICT FLOW TO THE CHANNEL OR INTERFERE WITH ITS FUNCTIONING.
- STABILIZATION SHALL BE DONE ACCORDING TO THE APPROPRIATE SPECIFICATIONS FOR PERMANENT SEEDING, VEGETATIVE PRACTICES, SODDING AND MATTING.
- 6. CONSTRUCTION SHALL BE SEQUENCED SO THAT NEWLY CONSTRUCTED CHANNELS ARE STABILIZED PRIOR TO BECOMING OPERATIONAL. TO AID IN THE ESTABLISHMENT OF VEGETATION, SURFACE WATER MAY BE PREVENTED FROM ENTERING THE NEWLY CONSTRUCTED CHANNEL THROUGH THE ESTABLISHMENT FERENCE.
- GULLIES THAT MAY FORM IN THE CHANNEL OR OTHER EROSION DAMAGE THAT OCCURS BEFORE THE GRASS LINING BECOMES ESTABLISHED SHALL BE REPAIRED WITHOUT DELAY.

| STORM DESIGN FREQUENCY (YEARS) | WATER QUALITY | 1 | 2 | 5 | 10 | 10 DURING CONSTRUCTION | 25 | 50 | 100 |
|--|------------------|---------|---------|---------|---------|------------------------|--------|---------|---------|
| PRE-DEVELOPED PEAK FLOW (CFS) | N/A | 1.56 | 1,72 | 3.3 | 4.07 | 4.07 | 4.85 | 5.85 | 6.25 |
| POST-DEVELOPED UNCONTROLLED PEAK FLOW (CFS) | N/A | 2.89 | 3.1 | 5.06 | 5.95 | 5.95 | 6.85 | 7.98 | 8.43 |
| POST-DEVELOPED PEAK FLOW FROM BASIN (CFS) | | 1.12 | 1.18 | 1.67 | 1.87 | 1.87 | 2.00 | 2.18 | 2.32 |
| DESIGN PEAK WATER ELEVATION (FT) | | 1068.22 | 1068.28 | 1068.77 | 1068.99 | 1068.99 | 1069.2 | 1069.47 | 1069.57 |
| DESIGN STORAGE VOLUME REQUIRED (CF) | | 2302 | 2478 | 4223 | 5067 | 5067 | 5953 | 7102 | 7552 |
| AS-CONSTRUCTED PEAK FLOW FROM BASIN (CFS) | | | | | | | | | |
| AS-CONSTRUCTED PEAK WATER ELEVATION (FT) | | | | | - | | | | |
| AS-CONSTRUCTED STORAGE VOLUME PROVIDED (CFT) | | | | | | | | | |

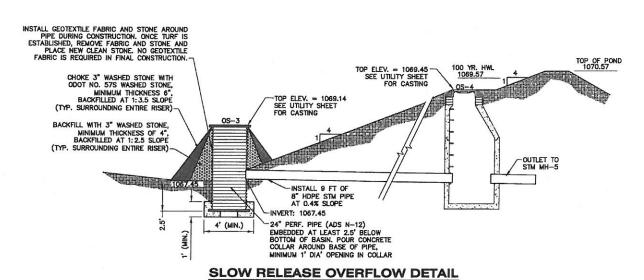


BELOW GRADE PLAN VIEW - WOOD POST 3" X 3" X 8" CONCRETE WASHOUT ABOVE GRADE PLAN VIEW STAPLE DETAIL - WOOD OR METAL STAKES TO SECURE THE STRAW BALES (2 PER BALE) STAPLES (2 PER BALE) SECTION B-B NOTES: 1. ACTUAL LAYOUT DETERMINED IN FIELD. 2. THE CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN 30 FT OF TEMPORARY CONCRETE WASHOUT FACILITY SECTION A-A

CONCRETE WASH-OUT

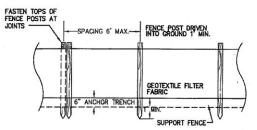

FRONT VIEW

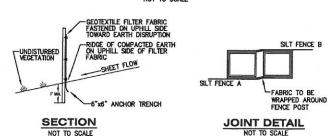

SILT FENCE DETAILS NOT TO SCALE



Proje 3/11/14 Sheet

ley & stewart, Ilc 20 south 11th street amazoo, michigan 49009 9.552.4960 fax 269.552.49 w.hurleystewart.com

hurley 2800 s Kalama 269.55 www.hu

500343)

(PARCEL

OH

MASSILLON,

GENERAL

DOLLAR

DETAIL

SWPPP

BUCHALTER

GROWTH

CAPITAL

S-2

SEEDING NOTES:

- ALL LAWN AREAS SHALL BE SEEDED AND MULCHED WITH THE FOLLOWING MIXTURE: 20% IMPROVED PERENNIAL RYEGRASS, 40% FINE FESCUE, AND 40% KENTUCKY BLUEGRASS AT A RATE OF 8-10 LBS/ 1000 SFT. PROVIDE 19-19-19 STARTER FERTILIZER AT A RATE OF 5-7 LBS/1000 SFT.
- BEGIN LAWN MAINTENANCE IMMEDIATELY AFTER EACH AREA IS PLANTED AND CONTINUE UNTIL ACCEPTABLE LAWN IS ESTABLISHED: A MINIMUM OF 60 DAYS AFTER SUBSTANTIAL COMPLETION.
- MAINTAIN AND ESTABLISH LAWN BY WATERING, FERTILIZING, WEEDING, MOWING, TRIMMING, REPLANTING, AND OTHER OPERATIONS. ROLL, REGRADE, AND REPLANT BARE OR ERODED AREAS AND REMULCH TO PRODUCE A UNIFORMLY SMOOTH LAWN.
- PROTECT ADJACENT AND ADJOINING STRUCTURES, UTILITIES, SIDEWALKS, PAVEMENTS, AND PLANTINGS FROM HYDROSEEDING OVER-SPRAY AND DAMAGE CAUSED BY PLANTING OPERATIONS.
- REMOVE STONES LARGER THAN 1" IN ANY DIMENSION AND REMOVE STICKS, ROOTS, RUBBISH, AND OTHER EXTRANEOUS MATTER FROM SITE.
- MAINTAIN LAWN UNTIL A HEALTHY, UNIFORM, CLOSE STAND OF GRASS HAS BEEN ESTABLISHED, FREE OF WEEDS AND SURFACE IRREGULARITIES, WITH COVERAGE EXCEEDING 90% OVER ANY 10 SQFT AND BARE SPOTS DO NOT EXCEED 5 BY 5 INCHES.
- SEED TOPSOIL STORAGE LOCATION AND ANY SOIL AREAS EXPOSED MORE THAN TWO WEEKS WITH AN ANNUAL GRASS MIX TO PREVENT SOIL EROSION.

SESC Construction and Maintenance Schedule

Project Name: Massillon Dollar General Project Start Date: June 2014 Project End Date: October 2014

Construction Schedule

| Consumble during | Jan | Feb | Manch | April | May | Juno | July | (DOD) | Stort. | Oct | Nov - | Dac |
|-------------------------|-----|-----|-------|-------|-----|------|-----------|-------|--------|-----------|-------|------------|
| Temporary SESC Measures | T | | | | | X | X | | | | | |
| Strip and Stock Pile | | | | | | X | | | | eszetessá | | |
| Rough Grading | | | | | | X | X | | | | | |
| Underground Utilities | | | | | | X | Х | | | | | |
| Pavement Installation | | | | | | | | Х | Х | Х | | |
| Building Construction | | | | | | | χ | X | Х | Х | | |
| Permanent SESC Measures | | | | | | Х | Х | X | Х | χ | | |
| Final Grading | | | | | | | | X | Х | X | | |
| Landscaping | | | | | | 0 J | lesses li | X | Х | Х | | and a give |

Maintenance Schedule

| Maintonines Sequence | Jan | Feb | March | April | May | Jone, | July | Aug | Sept | Oct . | Nov | Doc |
|--------------------------------|--------|--|-------|-------|-----|-------|------|-----|------|-------|------|-----|
| Street Sweeping | | | | | | X | X | X | Х | Х | | |
| Silt Fence Installation | | | 1 | | | X | Х | X | Х | Х | | |
| Maintain Buffer Strips | | | | | | Х | χ | X | X | Х | | |
| Seeding and Mulch | | O DE LA COMPANSA DE L | 1 | | | | | χ | χ | Х | | |
| Sediment Basins | | | | | | | | Х | Х | Х | | |
| Rip Rap | | | | 5 39 | | | | X | Х | Х | | |
| Remove Temporary SESC Measures | \neg | | | | | | | | | | S 7. | |