

D. ALL FIXTURES OR EQUIPMENT NOT USED SHALL BE STORED IN TALLERS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF HIS TRUCKS THROUGHOUT THE REMOVAL OF THE EXISTING BUILDING. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR ALL LOSS OR DAMAGED FIXTURES, CONTRACTOR WILL ALSO BE RESPONSIBLE FOR ALL LOSS OR DAMAGED FIXTURES, EQUIPMENT, PARTS OR TRASH SHALL BE LEFT OUTSIDE THE BUILDING AFTER COMPLETION OF THE DAYS WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF ALL EXISTING FIXTURES FROM THE SALES AREA TO FACILITATE INSTALLATION AND/OR RELOCATION OF FIXTURES PER PLANS AND SPECIFICATIONS.

3. FIXTURE LAYOUT OF ALL WALL DISPLAY AND COUNTERS SHALL BE A JOINT EFFORT OF THE CONTRACTOR AND K MAT PROJECT COORDINATOR. NO EXTRAS WILL BE PAID FOR FIXTURES CORRECTION, UNLESS APPROVED BY THE PROJECT REPRESENTATIVE.

4. THE GENERAL CONTRACTOR AND SUBCONTRACTORS SHALL BE SUBJECT TO ALL K MART SECURITY POLICIES. K MART CORPORATION RESERVES THE RIGHT TO CONDUCT SECURITY INSPECTIONS.

5. CONTRACTOR SHALL FURNISH ALL DUMPSTERS REQUIRED FOR REMOVAL OF TRASH AND DEBRIS RESULTING FROM DEMOLITION AND/OR CONSTRUCTION WORK. K
MART CORPORATION SHALL FURNISH ALL DUMPSTERS REQUIRED FOR REMOVAL OF TRASH AND DEBRIS RESULTING FROM FIXTURE WORK.

6. CONTRACTOR SHALL FURNISH AND INSTALL CEILING TILE TO BE USED IN ALL AREAS OF THE PROJECT WHERE THERE IS A POSSIBILITY OF LEAKAGE OF WATER OR FLUIDS. MISSING, PUNCTURED AND/OR WATER STAINED CEILING TILE SHALL BE REJECTED. UPON COMPLETION OF THE PROJECT, THE CONTRACTOR SHALL FURNISH 100 ADDITIONAL PIECES OF CEILING TILE TO THE STORE MANAGER FOR MISCELLANEOUS REPLACEMENT IN THE FUTURE.

7. BASE BID WILL INCLUDE REPLACEMENT OF DAMAGED FLOOR TILE IN THE FOLLOWING MAJOR AREAS: CHECKOUTS, SERVICE DESK, PHARMACY, VESTIBULE, LOBBY, WAITING ROOMS, SHOWERS, ELECTRONIC CENTER, AND ANY OTHER AREAS WHERE THERE IS A POSSIBILITY OF LEAKAGE OF WATER OR FLUIDS. CONTRACTOR SHALL FURNISH AND INSTALL AN ADDITIONAL 100 PIECES OF FLOOR TILE AS DIRECTED BY THE PROJECT REPRESENTATIVE. CONTRACTOR SHALL INCLUDE IN ITS PROPOSAL A UNIT PRICE PER TILE FOR ANY FLOOR TILE NEEDING REPLACEMENT IN ADDITION TO THE REQUIRED 100 PIECES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO IDENTIFY AND REPORT ANY DAMAGE TO FLOOR TILES TO THE PROJECT REPRESENTATIVE THAT BOTH PARTIES MAY KEEP AN ACCURATE COUNT OF SAID DAMAGE OCCURRING IN ORDER TO COMPLETION OF THE PROJECT. THE CONTRACTOR SHALL FURNISH THREE (3) BOXES OF ADDITIONAL FLOOR TILE TO THE STORE MANAGER FOR MISCELLANEOUS REPLACEMENT IN THE FUTURE.

8. ALL EXISTING EQUIPMENT IS THE PROPERTY OF K MART CORPORATION AND SHALL NOT BE DISPOSED OF UNTIL SO DIRECTED BY THE K MART PROJECT REPRESENTATIVE. THIS EQUIPMENT INCLUDES, BUT IS NOT LIMITED TO, HEATERS, LIGHTS, STERILIZER CUPBORDS, OVERHEAD DOORS, LIFT EQUIPMENT, ETC. DEMOLITION MATERIALS SUCH AS BRICKS, BLOCKS, CONCRETE, GROUT, PLASTER, PAINT, ETC., SHALL BE REMOVED AND STORED ON SITE BY THE CONTRACTOR. IF DISPOSAL OF THE EQUIPMENT IS NOT DESIGNATED OTHERWISE BY THE PROJECT REPRESENTATIVE, THE CONTRACTOR SHALL DISPOSE OF THE EQUIPMENT AS DIRECTED.


9. CONTRACTORS SHALL COORDINATE EXACT LOCATION OF TEMPORARY BARRIER WALLS REQUIRED FOR DEMOLITION WORK WITH THE K MART PROJECT REPRESENTATIVE.

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

10. CONTRACTOR SHALL INCLUDE THE BASE BID, THE RELOCATION AND INSTALLATION OF EXISTING SIGNAGE, THE CONSTRUCTION OF NEW SIGNAGE, THE REMOVAL OF EXISTING FLUXITE PLANT, AND THE CONSTRUCTION OF A NEW FLUXITE PLANT TO BE LOCATED ON THE FINISHED FLOOR.
11. GENERAL CONTRACTOR ALSO TO INSTALL ALL SEATING TABLES, RAILINGS, AND STOWAGE TO COMPLETE THE FOOD DEPARTMENT.
12. EXISTING PHARMACY TO REMAIN OPEN UNTIL NEW PHARMACY IS CONSTRUCTED AND OPERATIONAL.
13. RELOCATE FIRE EXTINGUISHERS AS NECESSARY, REPAINT RED TRIANGLES ON WALL AND RED STRIPES ON COLUMNS AS REQUIRED BY THE RELOCATION OF THE FIRE EXTINGUISHERS. LEAVE OUT INDICATORS NO LONGER APPLICABLE.
14. ALL TRENDING REQUIRED ON THE SHEETROCK REQUIRING SAMPINS OF CONCRETE AND JACKHAMMER IS PROHIBITED DURING THE STORE OPERATING HOURS.
15. CONTRACTOR SHALL INSTALL TILE PLATES AND TOE FILTERS ON ALL COUNTER BASES AND MAIL GRID WHERE CASES BUTT TOGETHER..
16. VINYL MAIL BASE SHALL BE INSTALLED ON ALL SALES WALLS NOT COVERED WITH MAIL GRID.
17. CONTRACTOR SHALL BOLT AND SECURE ALL END FRAMES TO COUNTER.
18. CONTRACTOR SHALL CUT TO FIT ALL FILLER BOXES..
19. CONTRACTOR SHALL CAULK ALL JOINTS, BOLT CASES TOGETHER, SHIM AND LEVEL, AND INSTALL VINYL MAIL BASE ON ALL SHOWCASES.
20. CONTRACTOR SHALL CAULK ALL MIRRORS INSTALLED IN FITTING ROOMS.
21. CONTRACTOR SHALL INSTALL PLASTIC CORNICE COVERS ON ALL CORNICE IN APPENDIX E

22. CONTRACTOR SHALL INCLUDE IN HIS BASE BID THE INSTALLATION OF ALL GUNOLAS (COUNTERS) AND "T" WALLS.
23. CONTRACTORS SHALL UNLOAD AND TRANSFER ALL MERCHANDISE FIXTURES TO STORAGE RAILLETS. TRAILERS FINISHED BY K. MARY. CONTRACTOR SHALL ORGANIZE AND INVENTORY ALL FIXTURES AND MISCELLANEOUS MATERIALS UPON RECEIPT. INVENTORY OF ALL FIXTURES ON INITIAL RECEIPT SHALL BE A JOINT EFFORT. CONTRACTOR SHALL BE RESPONSIBLE FOR PLANNING PROJECT COORDINATOR AND THE GENERAL CONTRACTOR. THE CONTRACTOR SHALL ORGANIZE AND CONSOLIDATE FIXTURES IN THE FIXTURE RAILLETS.
24. VERIFY ALL DIMENSIONS BEFORE CONSTRUCTION STARTS.
25. ALL WALL AND COUNTER PEGBOARD WILL BE WHITE UNLESS OTHERWISE NOTED.
26. INSTALL SINGLE SLOTTED HEAVY DUTY 100" CHARCOAL WALL STANDARDS 18" OFF FINISH FLOOR IN APPLIANCE/CAMERA DEPARTMENTS.
27. INSTALL DOUBLE SLOTTED 84" STANDARDS 12" OFF FINISH FLOOR.
28. ALL COUNTERS WILL BE (72" OR 84") UNLESS OTHERWISE NOTED.
29. ALL WALL GRID WILL BE 23" DEEP UNLESS OTHERWISE NOTED.
30. INSTALL SINGLE SLOTTED STANDARD (CUT TO 84½" LENGTH) 18" OFF FINISH FLOOR ON INFANTS DEPARTMENT WALL.
31. ALL CORNICE, CORNICE BRACKETS, CORNICE LIGHTING AND CORNICE REFLECTORS SHOWN ON PRINT ARE PRESENT IN THE STORE AND WILL BE RELOCATED BY CONTRACTOR.
32. ALL 95" HIGH APPAREL, COSMETICS AND HOSIERY "T" AND "I" WALLS WILL HAVE CORNICE REFLECTORS (FURNISHED BY K. MARY).

33. CONTRACTOR TO INCLUDE IN BISE BID ALL PERMETER SALES FOR WALL WORK. THIS IS TO INCLUDE INSTALLATION OF WALL GROUND, FURNISH STRIPS, WALL STANDARDS, WALL STANDARD EXTENSIONS, PERGOLA, CORNICE BRACKETS, CORNICE, CORNICE LIGHTS, AND WALL GRID AND DECK.
34. NEW METAL GROUNDAS WILL BE IDENTIFIED BY EITHER $3 \times 4 \frac{1}{2}$ OR $5 \times 4 \frac{1}{2}$ ANY FUTURE SIZE ENDING WITH $\frac{1}{2}$ WILL BE CONSIDERED A NEW METAL FUTURE.
35. CONTRACTOR SHALL PROVIDE AND INSTALL THREE (3) $1 \frac{1}{2} \times 8$ FURNISH STRIPS TO THE FLOOR AND COVER THE FLOOR PERIMETER SALES WITH PER STRIPS. THE FLOOR SHALL BE THE SAME AS THE PERIMETER SALES. THESE WALLS ARE TO RECEIVE WALL STANDARD EXTENSIONS. THE CONTRACTOR SHALL FURNISH BY K MART AND INSTALLED BY THE GENERAL CONTRACTOR. THE INSTALLATION OF THE STANDARDS ARE TO BE INCLUDED IN THE CONTRACTOR'S BASE BID.)
36. ALL NEW GROUNDAS ARE TO HAVE FROSTY WHITE PERGOLA EXCEPT AS NOTED. ALL RELOCATED GROUNDAS MAY BE CHINA WHITE AND FROSTY WHITE PEG PERGOLA EXTENSIONS.
37. BEFORE A COUNTER IS MODIFIED DUE TO COLUMN LAYOUT, THE LAYOUT SUPERVISOR WILL ADVISE THE CONTRACTOR WHETHER THE COUNTER WILL BE CUT OR IF THE AISLE SPACING WILL BE ADJUSTED TO ACCOMMODATE THE COLUMN.

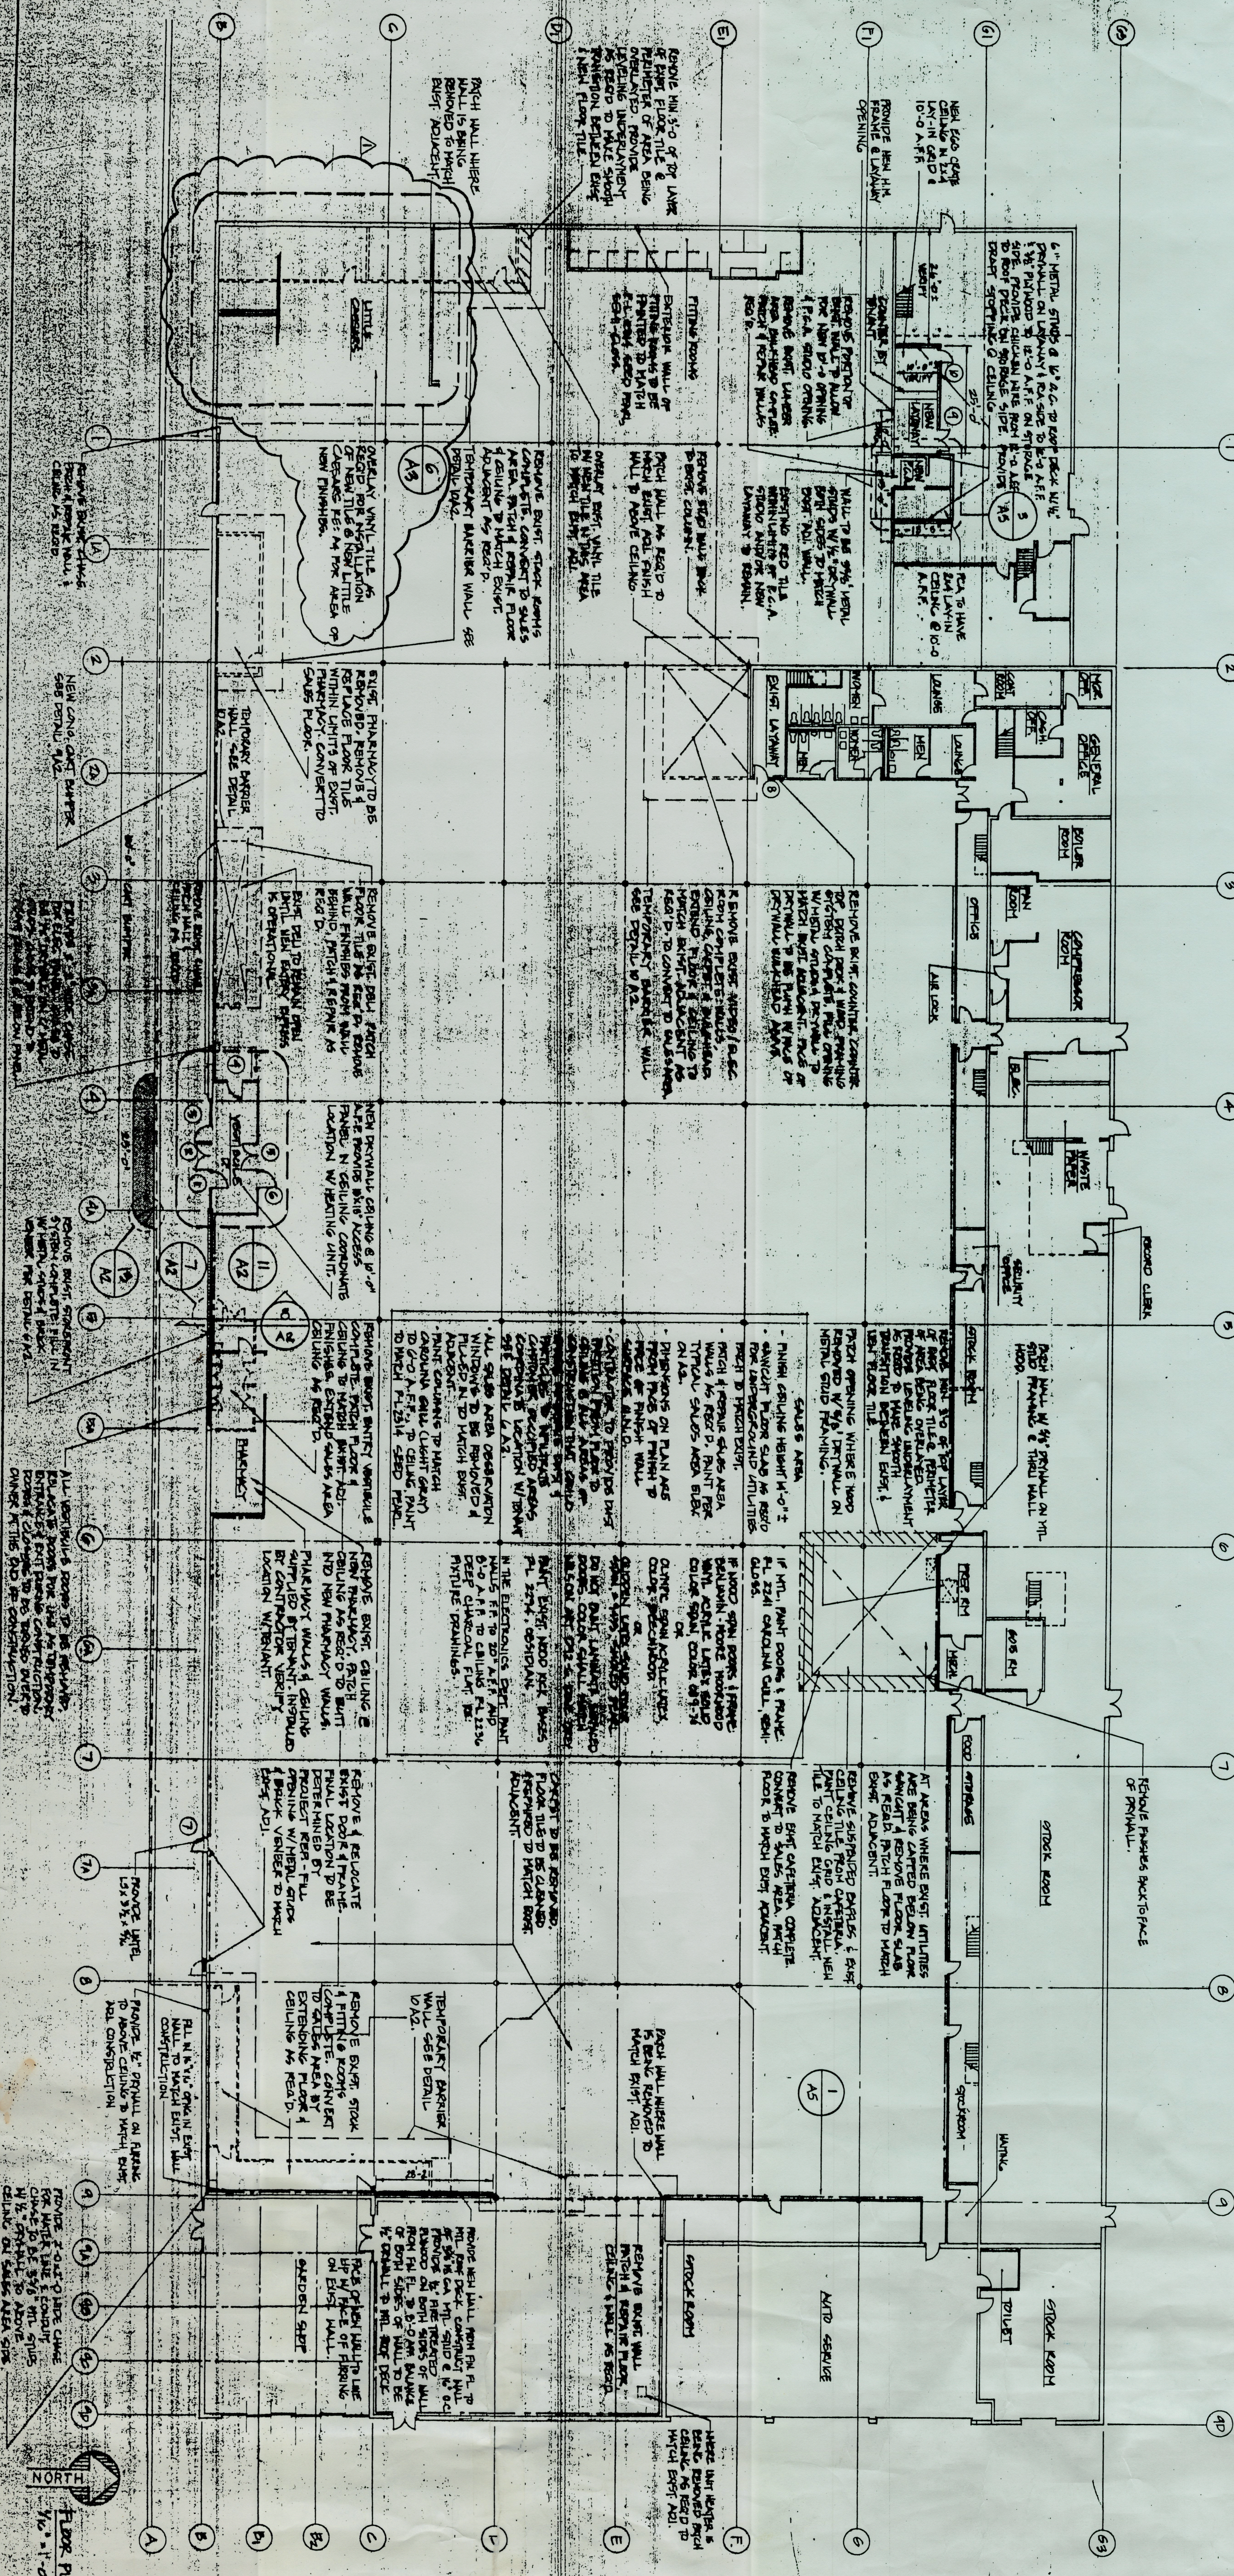

K MART #4169 MASSILLON, OHIO
2600 LINCOLN WAY E

M. L. SKILES