



2. DOOR CLOSER'S AND DOOR STOPS SHALL BE PERMITTED TO BE 78

INCHES (1980 MM) MINIMUM ABOVE THE FINISH FLOOR OR

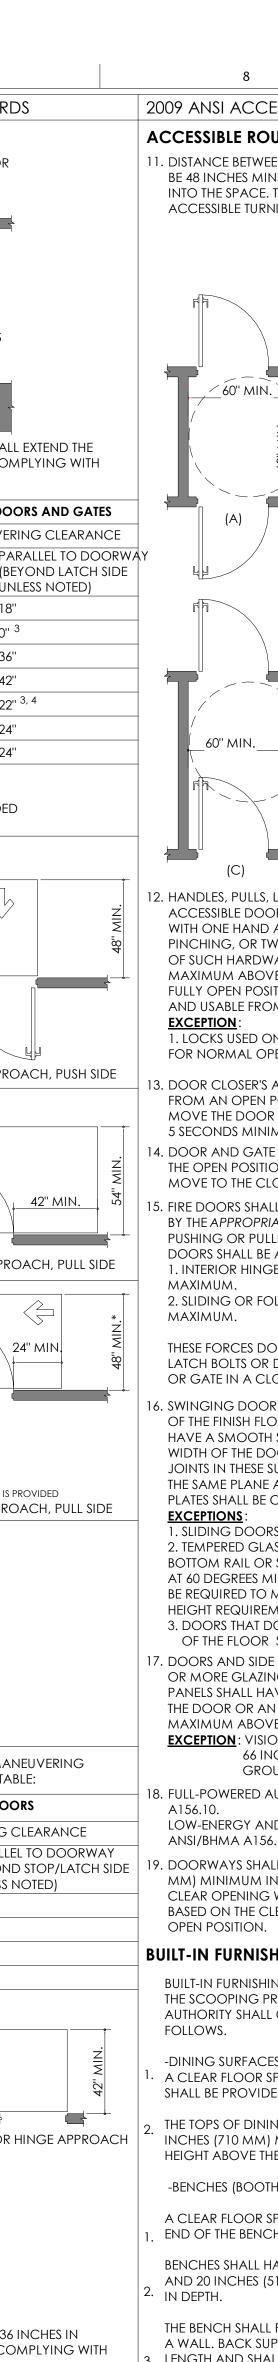

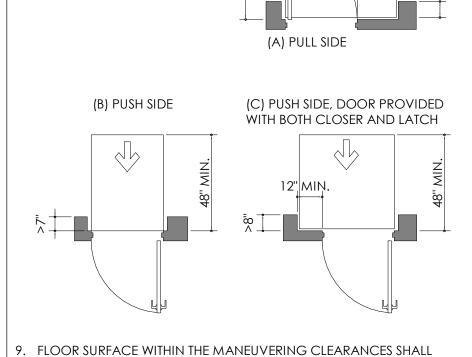

10. IF PROVIDED, THRESHOLDS @ DOORWAYS SHALL BE 1/2" MAXIMUM IN

SHALL COMPLY WITH FLOOR SURFACES AND CHANGE IN LEVEL

EXCEPTION: EXISTING OR ALTERED THRESHOLDS 3/4" MAXIMUM IN

HEIGHT THAT HAVE A BEVELED EDGE ON EACH SIDE


W/ A MINIMUM SLOPE OF 1:2 FOR THE HEIGHT

HEIGHT. RAISED THRESHOLDS AND CHANGES IN LEVEL @ DOORWAYS

HAVE A SLOPE NOT STEEPER THAN 1:48


EXCEEDING 1/4"


REQUIREMENTS.

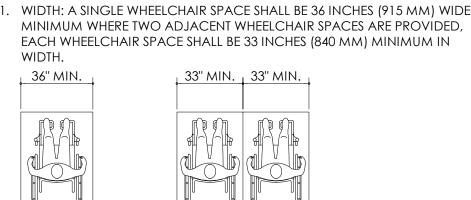

(B) MULTIPLE ADJACENT SPACES


(A) SINGLE SPACE

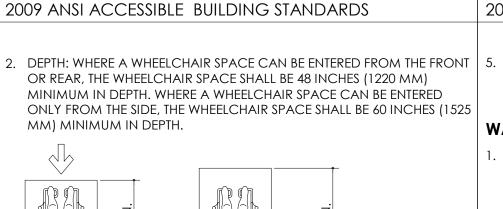

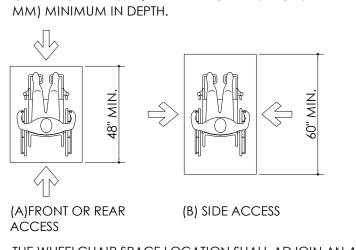

THE WHEELCHAIR SPACE LOCATION SHALL ADJOIN AN ACCESSIBLE ROUTE. THE ACCESSIBLE ROUTE SHALL NOT OVERLAP THE WHEELCHAIR SPACE LOCATION. . A COMPANION SEAT SHALL BE PROVIDED BESIDE EACH WHEELCHAIR

GLOBAL SYMBOL OF ACCESSIBILITY 3. VOLUME CONTROL TELEPHONES INTERNATIONAL SYMBOL OF TTY 4. ASSISTIVE LISTENING SYSTEMS

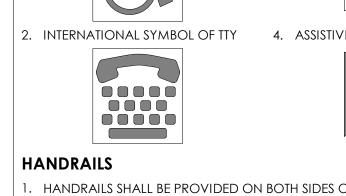

HANDRAILS SHALL BE PROVIDED ON BOTH SIDES OF STAIRS AND HANDRAILS SHALL BE CONTINUOUS WITHIN THE FULL LENGTH OF EACH STAIR FLIGHT OR RAMP RUN. INSIDE HANDRAILS ON SWITCHBACK OR DOGLEG STAIRS AND RAMPS SHALL BE CONTINUOUS BETWEEN **EXCEPTION**: HANDRAIL IN AISLES SERVING SEATING. TOP OF GRIPPING SURFACES OF HANDRAILS SHALL BE 34 INCHES (865

+

MM) MINIMUM AND 38 INCHES (965 MM) MAXIMUM VERTICALLY ABOVE STAIR NOSING'S, RAMP SURFACES & WALKING SURFACES. HANDRAILS SHALL BE AT A CONSISTENT HEIGHT ABOVE STAIR NOSING'S, RAMP SURFACES & WALKING SURFACES. MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS (A) STAIRS CLEARANCE BETWEEN HANDRAIL GRIPPING SURFACES AND ADJACENT SURFACES SHALL BE 11/2 INCHES (38 MM) MINIMUM.

\ 60" MIN.


HANDRAIL GRIPPING SURFACES SHALL BE CONTINUOUS WITHOUT INTERRUPTION BY NEWEL POSTS, OTHER CONSTRUCTION ELEMENTS, OR I. HANDRAIL BRACKETS OR BALUSTERS ATTACHED TO THE BOTTOM SURFACE OF THE HANDRAIL SHALL NOT BE

CONSIDERED OBSTRUCTIONS, PROVIDED THEY COMPLY WITH THE FOLLOWING CRITERIA: A). NOT MORE THAN 20 PERCENT OF THE HAND RAIL LENGTH IS OBSTRUCTED. B). HORIZONTAL PROJECTIONS BEYOND THE SIDES OF THE HANDRAIL OCCUR 1-1/2 INCHES MINIMUM BELOW THE BOTTOM OF THE HANDRAIL, AND PROVIDED THAT FOR DIMENSION INCH OF ADDITIONAL HANDRAIL PERIMETER EACH ABOVE 4 INCHES, THE VERTICAL CLEARANCE DIMENSION OF 1-1/2 INCH CAN BE REDUCED BY 1/8 INCH AND C). EDGES SHALL BE ROUNDED


+

(C) WALKING SURFACES

2. WHERE HANDRAILS ARE PROVIDED ALONG WALKING SURFACES WITH SLOPES NOT STEEPER THAN 1:20, THE BOTTOMS OF HANDRAIL GRIPPING SURFACES SHALL BE PERMITTED TO BE OBSTRUCTED ALONG THEIR ENTIRE LENGTH WHERE THEY ARE INTEGRAL TO CRASH RAILS OR BUMPER GUARDS.




HANDRAIL GRIPPING SURFACES WITH A CIRCULAR CROSS SECTION SHALL HAVE AN OUTSIDE DIAMETER OF 11/4 INCHES (32 MM) MINIMUM AND 2 INCHES (51 MM) MAXIMUM. HANDRAIL GRIPPING SURFACES WITH A NON-CIRCULAR CROSS SECTION SHALL HAVE A PERIMETER DIMENSION OF 4 INCHES (100 MM) MINIMUM AND 61/4 INCHES (160 MM) MAXIMUM, AND A CROSS-SECTION DIMENSION OF 21/4 INCHES (57 MM) MAXIMUM.

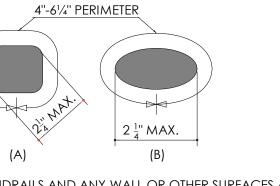


HANDRAILS AND ANY WALL OR OTHER SURFACES ADJACENT TO THEM, SHALL BE FREE OF ANY SHARP OR ABRASIVE ELEMENTS. EDGES SHALL BE ROUNDED. P. HANDRAILS SHALL NOT ROTATE WITHIN THEIR FITTINGS. 10. HANDRAIL GRIPPING SURFACES SHALL EXTEND BEYOND AND IN THE

SAME DIRECTION OF STAIR FLIGHTS AND RAMP RUNS. 1. CONTINUOUS HANDRAILS @ THE INSIDE TURN OF STAIRS & 2. EXTENSIONS ARE NOT REQUIRED IN AISLES SERVING SEATING WHERE THE HANDRAILS ARE DISCONTINUOUS TO PROVIDE ACCESS TO SEATING AND TO PERMIT CROSSOVERS WITHIN 3. IN ALTERATIONS, FULL EXTENSIONS OF HANDRAILS SHALL NOT BE REQUIRED WHERE SUCH EXTENSIONS WOULD BE

. RAMP HANDRAILS SHALL EXTEND HORIZONTALLY ABOVE THE LANDING 12 INCHES (305 MM) MINIMUM BEYOND THE TOP AND BOTTOM OF RAMP RUNS. EXTENSIONS SHALL RETURN TO A WALL, GUARD, OR FLOOR, OR SHALL BE CONTINUOUS TO THE HANDRAIL OF AN ADJACENT RAMP RUN.

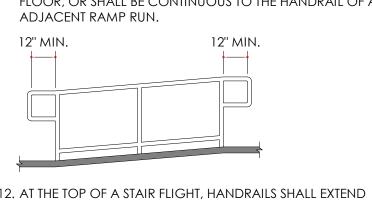

HORIZONTALLY ABOVE THE LANDING FOR 12 INCHES (305 MM) MINIMUM BEGINNING DIRECTLY ABOVE THE LANDING NOSING. EXTENSIONS SHALL RETURN TO A WALL, GUARD, OR THE LANDING SURFACE, OR SHALL BE CONTINUOUS TO THE HANDRAIL OF AN ADJACENT STAIR FLIGHT. AT THE BOTTOM OF A STAIR FLIGHT, HANDRAILS SHALL EXTEND AT THE SLOPE OF THE STAIR FLIGHT FOR A HORIZONTAL DISTANCE EQUAL TO ONE TREAD DEPTH BEYOND THE BOTTOM TREAD NOSING. EXTENSION SHALL RETURN TO A WALL, GUARD, OR THE LANDING SURFACE, OR SHALL BE CONTINUOUS TO THE HANDRAIL OF AN ADJACENT STAIR

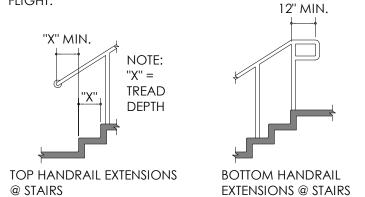

TOILET & BATHING ROOMS TURNING SPACE SHALL BE PROVIDED WITHIN THE ROOM. . CLEAR FLOOR SPACES, CLEARANCE AT FIXTURES, AND TURNING SPACE . WIDTH: A SINGLE WHEELCHAIR SPACE SHALL BE 36 INCHES (915 MM) WIDE SHALL BE PERMITTED TO OVERLAP. . DOORS SHALL NOT SWING INTO THE CLEAR FLOOR SPACE OR CLEARANCE REQUIRED FOR ANY FIXTURE.

MM) MAXIMUM ABOVE THE FLOOR.

1. WHERE THE ROOM IS FOR INDIVIDUAL USE AND A CLEAR FLOOR SPACE IS PROVIDED WITHIN THE ROOM BEYOND THE ARC OF THE DOOR SWING. 4. MIRRORS LOCATED ABOVE LAVATORIES OR COUNTERTOPS SHALL BE MOUNTED WITH THE BOTTOM EDGE OF THE REFLECTING SURFACE 40 INCHES (1015 MM) MAXIMUM ABOVE THE FLOOR. MIRRORS NOT LOCATED ABOVE LAVATORIES OR COUNTERTOPS SHALL BE MOUNTED WITH THE BOTTOM EDGE OF THE REFLECTING SURFACE 35 INCHES (890 2009 ANSI ACCESSIBLE BUILDING STANDARDS COAT HOOKS SHALL BE LOCATED WITHIN ONE OF THE REACH RANGES. SHELVES SHALL BE LOCATED 40 INCHES (1015 MM) MINIMUM AND 48 INCHES (1220 MM) MAXIMUM ABOVE THE FLOOR.

1*7*"-19"

(B) AMBULATORY

ACCESSIBLE WATER

THE REQUIRED CLEARANCE AROUND THE WATER CLOSET SHALL BE

PAPER DISPENSERS, SANITARY NAPKIN RECEPTACLES, COAT HOOKS, SHELVES, ACCESSIBLE ROUTES, CLEAR FLOOR SPACE AND CLEARANCES

PERMITTED TO OVERLAP THE WATER CLOSET, ASSOCIATED GRAB BARS,

REQUIRED AT OTHER FIXTURES, AND THE TURNING SPACE. NO OTHER FIXTURES OR OBSTRUCTIONS SHALL BE LOCATED WITHIN THE REQUIRED

SEAT. SEATS SHALL NOT BE SPRUNG TO RETURN TO A LIFTED POSITION.

LENGTH SHALL BE MOUNTED WITH THE BOTTOM OF THE BAR LOCATED

BETWEEN 39 INCHES AND 41 INCHES ABOVE THE FLOOR, AND WITH THE

1. THE REAR GRAB BAR SHALL BE PERMITTED TO BE 24 INCHES (610

MM) MINIMUM IN LENGTH, CENTERED ON THE WATER CLOSET.

WHERE WALL SPACE DOES NOT PERMIT A LENGTH OF 36 INCHES

AND THE SIDE WALL CLOSEST TO THE WATER CLOSET.

NCHES (410 MM) MINIMUM ON THE TRANSFER SIDE.

(A) ACCESSIBLE

WATER CLOSETS

OTHER FIXTURES

60" MIN.

WATER CLOSET CLEARANCE.

FROM THE REAR WALL.

54" MIN.

12" MAX.42" MIN

NOT ALLOWED


WITHIN THIS

WATER CLOSETS & TOILET COMPARTMENTS (CONTINUED) LOCATION FROM THE SIDE WALL OR | 56 INCHES MINIMUM PARTITION CLOSEST TO WATER CLOSETS & TOILET COMPARTMENTS THE WATER CLOSET THE WATER CLOSET SHALL BE LOCATED WITH A WALL OR PARTITION TO THE REAR AND TO ONE SIDE. THE CENTERLINE OF THE WATER CLOSET FROM THE SIDE WALL OR SHALL BE 16 INCHES (405 MM) MINIMUM TO 18 INCHES (455 MM) PARTITION FARTHEST 4 INCHES MAXIMUM MAXIMUM FROM THE SIDE WALL OR PARTITION. WATER CLOSETS FROM THE WATER CLOSE LOCATED IN AMBULATORY ACCESSIBLE COMPARTMENTS SHALL HAVE THE FROM THE REAR WALL 52 INCHES MINIMUM CENTERLINE OF THE WATER CLOSET 17 INCHES MINIMUM TO 19 INCHES | SIDE WALL OR PARTITION | MAXIMUM FROM THE SIDE WALL OR PARTITION. WALL-HUNG WATER FROM THE FRONT WALL | 4 INCHES MAXIMUM CLOSET OR PARTITION

FROM THE REAR WALL 55 INCHES MINIMUM SIDE WALL OR PARTITION FLOOR - HUNG WATER FROM THE FRONT WALL 4 INCHES MAXIMUM THE FRONT PARTITION AND AT LEAST ONE SIDE PARTITION SHALL PROVIDE A TOE CLEARANCE OF 9 INCHES (230 MM) MINIMUM ABOVE THE FLOOR AND 6 INCHES (150 MM) DEEP MINIMUM BEYOND THE COMPARTMENT-SIDE FACE OF THE PARTITION. EXCLUSIVE OF PARTITION CLEARANCE AROUND A WATER CLOSET SHALL BE 60 INCHES (1525 MM) SUPPORT MEMBERS. COMPARTMENTS FOR CHILDREN'S USE SHALL MINIMUM MEASURED PERPENDICULAR FROM THE SIDE WALL AND 56 PROVIDE A TOE CLEARANCE OF 12 INCHES (305 MM) MINIMUM ABOVE INCHES (1420 MM) MINIMUM MEASURED PERPENDICULAR FROM THE REAL

THE FLOOR AND EXTENDING 6 INCHES BEYOND THE COMPARTMENT SIDE FACE OF THE PARTITION, EXCLUSIVE OF PARTITION SUPPORT MEMBERS. 1. TOE CLEARANCE AT THE FRONT PARTITION IS NOT REQUIRED IN A COMPARTMENT GREATER THAN 62 INCHES (1575 MM) DEEP WITH A WALL-HUNG WATER CLOSET OR GREATER THAN 65 INCHES (1650) MM) IN DEPTH WITH A FLOOR-MOUNTED WATER CLOSET. IN A COMPARTMENT GREATER THAN 65 INCHES IN DEPTH, TOE CLEARANCE AT THE FRONT PARTITION IS NOT REQUIRED.


2. TOE CLEARANCE AT THE SIDE PARTITION IS NOT REQUIRED IN A COMPARTMENT GREATER THAN 66 INCHES (1675 MM) IN WIDTH.

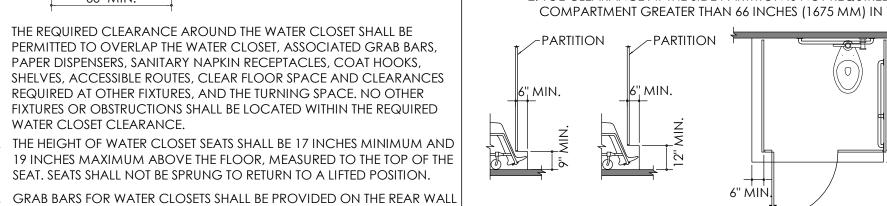

GRAB BARS FOR WATER CLOSETS SHALL BE PROVIDED ON THE REAR WALL (A) ELEVATION (B) ELEVATION FIXED, SIDE WALL GRAB BAR SHALL BE 42 INCHES (1065 MM) IN LENGTH 4. A SIDE-WALL GRAB BAR SHALL BE PROVIDED AND SHALL BE LOCATED ON MINIMUM, LOCATED 12 INCHES (305 MM) MAXIMUM FROM THE REAR THE WALL CLOSEST TO THE WATER CLOSET. IN ADDITION, A REAR-WALL WALL AND EXTENDING 54 INCHES (1370 MM) MINIMUM FROM THE REAR GRAB BAR SHALL BE PROVIDED. WALL. IN ADDITION, A VERTICAL GRAB BAR 18 INCHES MINIMUM IN

AMBULATORY ACCESSIBLE COMPARTMENTS SHALL BE 60 INCHES (1525) MM) MINIMUM IN DEPTH AND 36 INCHES (890 MM) MINIMUM IN WIDTH. CENTER LINE OF THE BAR LOCATED BETWEEN 39 INCHES AND 41 INCHES TOILET COMPARTMENT DOORS, INCLUDING DOOR HARDWARE, SHALL COMPLY WITH ANSI REQUIREMENTS, EXCEPT IF THE APPROACH IS TO THE LATCH SIDE OF THE COMPARTMENT DOOR, THE CLEARANCE BETWEEN THE


THE REAR WALL GRAB BAR SHALL BE 36 INCHES (915 MM) MINIMUM IN LENGTH AND EXTEND FROM THE CENTERLINE OF THE WATER CLOSET 12 INCHES (305 MM) MINIMUM ON THE SIDE CLOSEST TO THE WALL, AND 24 DOOR SIDE OF THE COMPARTMENT AND ANY OBSTRUCTION SHALL BE 42 INCHES MINIMUM. THE DOOR SHALL BE SELF-CLOSING. A DOOR PULL SHALL BE PLACED ON BOTH SIDES OF THE DOOR NEAR THE LATCH. COMPARTMENT DOORS SHALL NOT SWING INTO THE REQUIRED MINIMUM AREA OF THE COMPARTMENT.

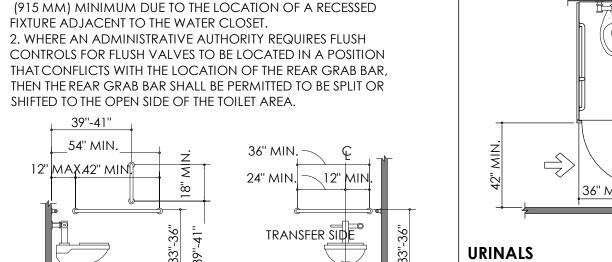


(A) SIDE WALL GRAB BAR (B) REAR WALL GRAB FOR WATER CLOSET BAR FOR WATER CLOSET WHERE SWING-UP GRAB BARS ARE INSTALLED, A CLEARANCE OF 18 INCHES MINIMUM FROM THE CENTERLINE OF THE WATER CLOSET TO ANY SIDE WALL OR OBSTRUCTION SHALL BE PROVIDED. A SWING-UP GRAB BAR SHALL BE INSTALLED WITH THE CENTERLINE OF THE GRAB BAR 15 3/4" FROM THE CENTERLINE OF THE WATER CLOSET. SWING-UP GRAB BARS SHALL BE 28" MINIMUM IN LENGTH, MEASURED FROM THE WALL TO THE

END OF THE HORIZONTAL PORTION OF THE GRAB BAR. FLUSH CONTROLS SHALL BE HAND OPERATED OR AUTOMATIC. FLUSH **EXCEPTION**: IN AMBULATORY ACCESSIBLE COMPARTMENTS, FLUSH CONTROLS SHALL BE PERMITTED TO BE LOCATED ON EITHER SIDE OF THE WATER CLOSET.


D. TOILET PAPER DISPENSERS SHALL BE 7 INCHES (180 MM) MINIMUM AND 9 INCHES (230 MM) MAXIMUM IN FRONT OF THE WATER CLOSET MEASURED TO THE CENTERLINE OF THE DISPENSER. THE OUTLET OF THE DISPENSER SHALL BE 15 INCHES (380 MM) MINIMUM AND 48 INCHES (1220 MM) MAXIMUM ABOVE THE FINISH FLOOR AND SHALL NOT BE LOCATED BEHIND GRAB BARS. DISPENSERS SHALL NOT BE OF A TYPE THAT CONTROLS DELIVERY OR THAT DOES NOT ALLOW CONTINUOUS PAPER FLOW.

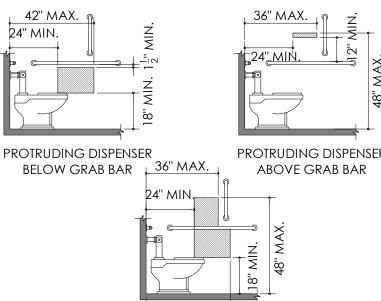

RECESSED DISPENSER). WHEELCHAIR ACCESSIBLE COMPARTMENTS SHALL BE 60 INCHES (1525 MM) WIDE MINIMUM MEASURED PERPENDICULAR TO THE SIDE WALL, AND 56 INCHES (1420 MM) DEEP MINIMUM FOR WALL HUNG WATER CLOSETS and 59 inches (1500 mm) deep minimum for floor mounted water CLOSETS MEASURED PERPENDICULAR TO THE REAR WALL. WHEELCHAIR ACCESSIBLE COMPARTMENTS FOR CHILDREN'S USE SHALL BE 60 INCHES (1525 MM) WIDE MINIMUM MEASURED PERPENDICULAR TO THE SIDE WALL, AND 59 INCHES (1500 MM) DEEP MINIMUM FOR WALL HUNG AND

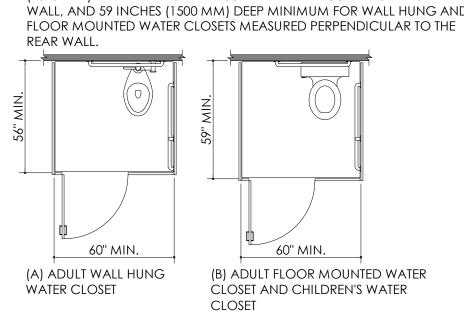


(B) ADULT FLOOR MOUNTED WATER I. TOILET COMPARTMENT DOORS, INCLUDING DOOR HARDWARE, SHALL COMPLY WITH DOORS, DOORWAYS & GATEWAYS REQUIREMENTS, EXCEPT THAT IF THE APPROACH IS TO THE LATCH SIDE OF THE COMPARTMENT DOOR, CLEARANCE BETWEEN THE DOOR SIDE OF THE COMPARTMENT AND ANY OBSTRUCTION SHALL BE 42 INCHES (1065 MM) MINIMUM. DOORS SHALL BE LOCATED IN THE FRONT PARTITION OR IN THE SIDE WALL OR PARTITION FARTHEST FROM THE WATER CLOSET. WHERE LOCATED IN THE FRONT PARTITION, THE DOOR OPENING SHALL BE 4 INCHES (100 MM) MAXIMUM FROM THE SIDE WALL OR PARTITION FARTHEST FROM THE WATER CLOSET. WHERE LOCATED IN THE SIDE WALL OR PARTITION, THE DOOR OPENING SHALL BE 4 INCHES (100 MM) MAXIMUM FROM THE FRONT PARTITION. THE DOOR SHALL BE SELF-CLOSING. A DOOR PULL SHALL BE PLACED ON BOTH SIDES OF THE DOOR NEAR THE LATCH. TOILET COMPARTMENT DOORS SHALL NOT SWING INTO THE MINIMUM REQUIRED COMPARTMENT AREA.

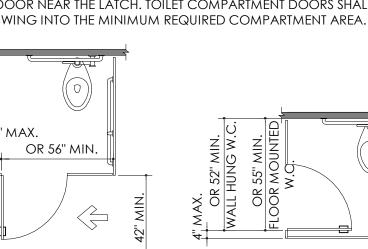

2. COMPARTMENTS SHALL BE ARRANGED FOR LEFT-HAND OR RIGHT-HAND

APPROACH TO THE WATER CLOSET.

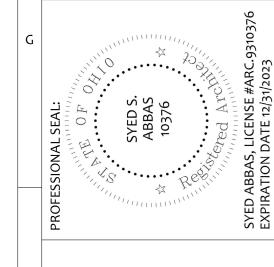

17 INCHES (430 MM) MAXIMUM ABOVE THE FLOOR.

URINALS SHALL BE THE STALL-TYPE OR THE WALL-HUNG TYPE WITH THE RIM

(A) WALL HUNG TYPE (B) STALL TYPE A CLEAR FLOOR OR GROUND SPACE POSITIONED FOR FORWARD APPROACH SHALL BE PROVIDED. CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET | 3. FLUSH CONTROLS SHALL BE HAND OPERATED OR AUTOMATIC. HAND OPERATED SHALL COMPLY WITH THE OPERABLE PARTS REQUIREMENTS

LAVATORIES & SINKS

A CLEAR FLOOR SPACE COMPLYING WITH ANSI REQUIREMENTS, POSITIONED FOR FORWARD APPROACH SHALL BE PROVIDED. KNEE AND TOE CLEARANCE COMPLYING WITH ANSI REQUIREMENTS SHALL BE PROVIDED. THE DIP OF THE OVERFLOW SHALL NOT BE CONSIDERED IN DETERMINING KNEE AND TOE CLEARANCE.


I . THE REQUIREMENT FOR KNEE AND TOE CLEARANCE SHALL NOT APPLY TO MORE THAN ONE BOWL OF A MULTI-BOWL SINK. 2. A PARALLEL APPROACH SHALL BE PERMITTED AT WET BARS. THE FRONT OF LAVATORIES AND SINKS SHALL BE 34 INCHES (865 MM) MAXIMUM ABOVE THE FLOOR, MEASURED TO THE HIGHER OF THE RIM OR COUNTER SURFACE.

FAUCETS SHALL COMPLY WITH ANSI "OPERABLE PARTS" REQUIREMENTS. HAND-OPERATED METERING FAUCETS SHALL REMAIN OPEN FOR 10 SECONDS MINIMUM. WHERE ENHANCED REACH RANGE IS REQUIRED AT LAVATORIES, FAUCETS

AND SOAP DISPENSER CONTROLS SHALL HAVE A REACH DEPTH OF 11 INCHES MAXIMUM OR, IF AUTOMATIC, SHALL BE ACTIVATED WITHIN A REACH DEPTH OF 11 INCHES MAXIMUM. WATER AND SOAP FLOW SHALL BE PROVIDED WITH A REACH DEPTH OF 11 INCHES MAXIMUM. WATER SUPPLY AND DRAINPIPES UNDER LAVATORIES AND SINKS SHALL BE INSULATED OR OTHERWISE CONFIGURED TO PROTECT AGAINST CONTACT. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER LAVATORIES AND SINKS.

OPERABLE PARTS ON TOWEL DISPENSERS AND HAND DRYERS SHALL COMPLY WITH THE FOLLOWING TABLE: COVER WATER SUPPLY AND DRAIN PIPES UNDER LAVATORIES AND SINKS SHALL BE INSULATED OR OTHERWISE CONFIGURED TO PROTECT AGAINST CONTACT. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER LAVATORIES AND SINKS.

MAXIMUM REACH DEPTH AND HEIGHT FOR TOWEL DISPENSERS AND HAND DRYERS | 5 | 6 | 9 REACH DEPTH | INCH | INCHES | INCHES | INCHES | INCHES | INCHES MAXIMUM 48 46 42 40 36 34 | REACH HEIGHT | INCHES | INCHES | INCHES | INCHES | INCHES | INCHES |

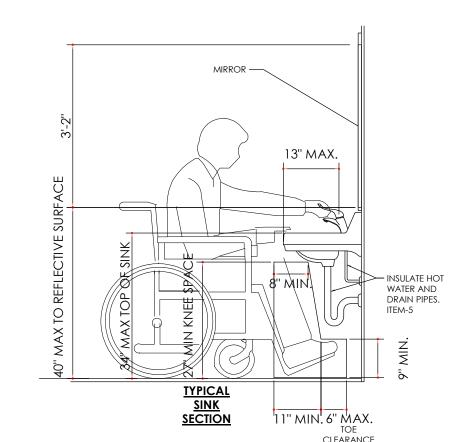

DRINKING FOUNTAINS

A CLEAR FLOOR SPACE POSITIONED FOR A FORWARD APPROACH TO THE DRINKING FOUNTAIN SHALL BE PROVIDED. KNEE AND TOE SPACE SHALL BE PROVIDED. THE CLEAR FLOOR SPACE SHALL BE CENTERED ON THE

DRINKING FOUNTAIN. 1. DRINKING FOUNTAINS FOR STANDING PERSONS ONLY. 2. DRINKING FOUNTAINS FOR CHILDREN'S USE SHALL BE PERMITTED WHERE THE SPOUT IS 30 INCHES MAX. ABOVE THE FLOOR, AND A PARALLEL APPROACH, CENTERED ON THE DRINKING FOUNTAIN, IS 3. IN EXISTING BUILDINGS, EXISTING DRINKING FOUNTAINS PROVIDING A PARALLEL APPROACH, CENTERED ON THE RINKING FOUNTAIN, SHALL BE PERMITTED. 4. WHERE SPECIFICALLY PERMITTED BY THE ADMINISTRATIVE AUTHORITY, A PARALLEL APPROACH CENTERED ON THE DRINKING FOUNTAIN, SHALL BE PERMITTED FOR DRINKING FOUNTAINS THAT REPLACE EXISTING DRINKING FOUNTAINS WITH A PARALLEL

PROJECT NO 2203-1 DRAWN BY CHECKED BY

ACCESSIBILITY REQUIREMENTS

SCALE: 1/4" = 1'-0"