







	LVT-1	LUXURY VINYL TILE
	LVT-2	LUXURY VINYL TILE
	LVT-3	LUXURY VINYL TILE
	LVT-4	LUXURY VINYL TILE
	LVT-5	LUXURY VINYL TILE
	LVT-6	LUXURY VINYL TILE
	LVT-7	LUXURY VINYL TILE
	LVT-8	LUXURY VINYL TILE
	LVT-9	LUXURY VINYL TILE
	LVT-10	LUXURY VINYL TILE
	CPT-1	CARPET TILE
	CPT-2	CARPET TILE
	CPT-3	CARPET TILE
	CPT-4	CARPET TILE
	CPT-5	CARPET TILE
	CPT-6	CARPET TILE
	LIN-1	LINOLEUM
	LIN-2	LINOLEUM
	LIN-3	LINOLEUM
	LIN-4	LINOLEUM
	LIN-5	LINOLEUM
	LIN-6	LINOLEUM
	LIN-7	LINOLEUM
	LIN-8	LINOLEUM
	PFT-1	PORCELAIN FLOOR TILE
CG	STAINLESS STEEL CORNER GUARD	


1. GENERAL FINISH NOTES
2. 1. ALL LVT MUST BE PROVIDED BY SAME MANUFACTURER TO KEEP A CONSISTENT MATERIAL PATTERNS
3. 2. ALL UNCLEINUM MUST BE PROVIDED BY SAME MANUFACTURER TO KEEP A CONSISTENT MATERIAL PATTERN
4. 3. SEE INTERIOR ELEVATIONS FOR ACCENT WALL LOCATIONS
5. 4. SEE RESTROOM PLANS AND ELEVATIONS FOR WALL TILE PATTERN
6. 5. SEE FINISH PLAN FOR TRANSITION LOCATIONS
7. 6. ALL EXPOSED SIDES OF WALL TILE TO BE FINISHED WITH 1:1 TRIM. SEE AS-62
8. 7. ALL PROPOSED SHOWS ON MATERIAL SCHEDULE IS HOWN TO BE BASED ON DESIGN. OTHER
9. 8. WARRANTY CONDITIONS THAT MEET ALL REQUIREMENTS MUST BE SUBSTITUTED PENDING ARCHITECT
10. 9. APPROVAL
11. 10. SEE FINISH PLAN FOR SEALED CONCRETE CONTROL JOINTS
12. 11. UNCLEINUM SEAMS SHALL NOT FIT IT SEAMS IN LIEU OF HEAT WELDED
13. 12. SHOWER CLEARANCE MUST BE 36" MINIMUM FROM FINISH FACE TO FINISH FACE.
14. 13. ALL FIXTURES AND RESTROOM ACCESSORIES MUST MAINTAIN ACCESSIBILITY REQUIREMENTS
15. 14. FROM FINISH DIMENSIONS
16. 15. CONTRACTOR TO PROVIDE BLOCKING BEHIND STUD WALLS WHERE CASEWORK, SHELVING,
17. 16. HANGING CLOSET, RESTROOM, AND SHOWER LOCATIONS
18. 17. WOOD DOOR COLOR TO BE SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS
19. 18. DURING SHOP DRAWING PHASE
20. 19. TO PROVIDE A WALL DOOR AND FRAME COLOR TO BE 1-P1 UNLESS NOTED OTHERWISE ON INTERIOR
21. 20. ELEVATIONS
22. 21. CORNER GUARDS INDICATED ON FINISH PLAN AS 'CG'
23. 22. ALL FLOOR CONTROL JOINTS AS INDICATED ON FINISH PLAN ARE TO BE 1/4" DEPTH OF 3/8" FINISHES. IF
24. 23. JOINT IS GREATER THAN 1/2" DEEP, FILL WITH FOAM BACKER ROD 1/8" WIDER THAN JOINT, FILL ALL
25. 24. JOINTS WITH JOSE SOLUBLE PUTTY. SEE FINISH PLAN FOR JOINT COLOCATIONS
26. 25. CONTRACTOR TO PROVIDE WALK OFF MATS AT ALL BUILDING ENTRANCES
27. 26. SEE AS-61 FOR FINISH SCHEDULE
28. 27. SEE INTERIOR ELEVATIONS FOR FLOOR FINISH LOCATIONS. SEE AS-62 FOR DETAIL
29. 28. CONTINUE FINISH DETAILS UNDER OPEN CASEWORK, TYP.
30. 29. SEE AS-62 FOR DETAILS REGARDING THE FLOORING MATERIAL

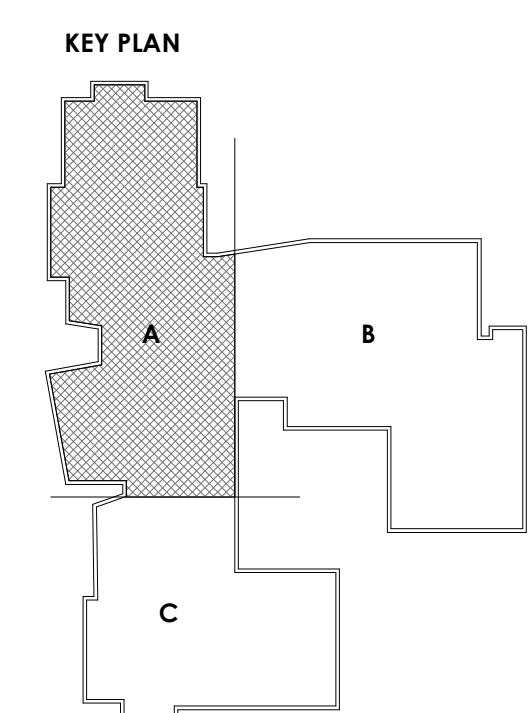

FIRST FLOOR FINISH PLAN -
UNIT A



SCALE: 1/16" = 1'-0"

[illegible]