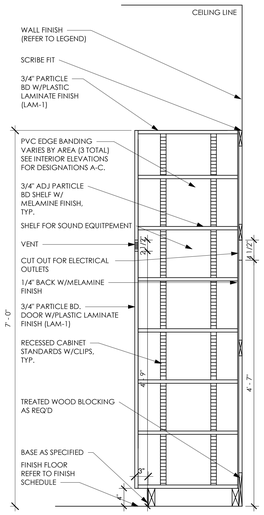

1 CASEWORK SECTION
1" = 1'-0"

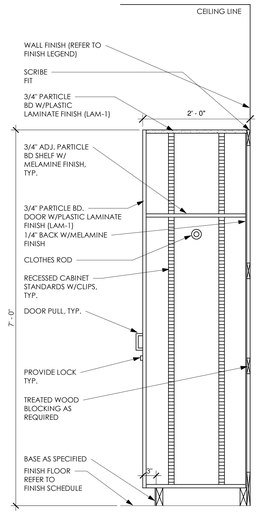

2 CASEWORK SECTION
1" = 1'-0"

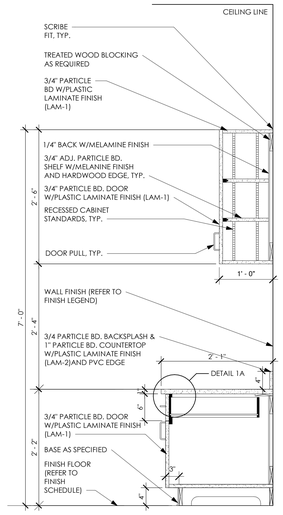

3 CASEWORK SECTION
1" = 1'-0"

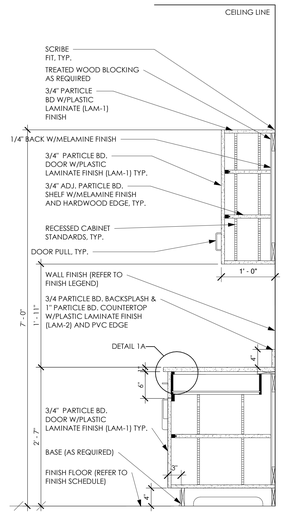

4 CASEWORK SECTION
1" = 1'-0"

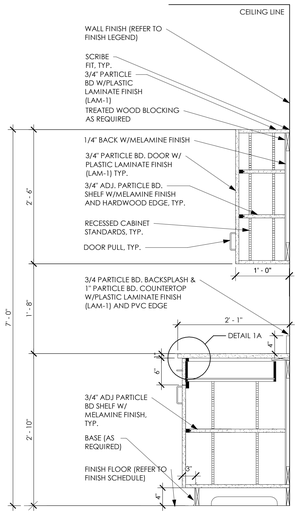

5 CASEWORK SECTION
1" = 1'-0"

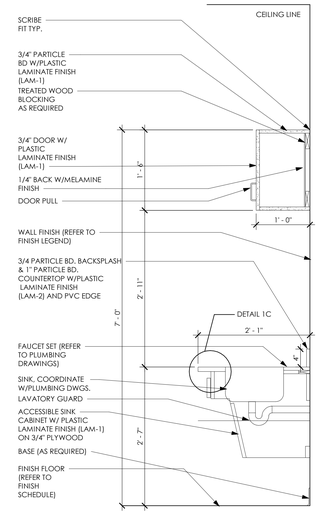

6 CASEWORK SECTION
1" = 1'-0"

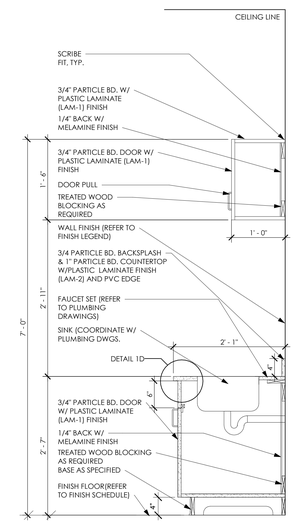

7 CASEWORK SECTION
1" = 1'-0"



8 CASEWORK SECTION
1" = 1'-0"



9 CASEWORK SECTION
1" = 1'-0"



10 CASEWORK SECTION
1" = 1'-0"



11 CASEWORK SECTION
1" = 1'-0"



12 CASEWORK SECTION
1" = 1'-0"



13 CASEWORK SECTION
1" = 1'-0"

14 CASEWORK SECTION 20
1" = 1'-0"

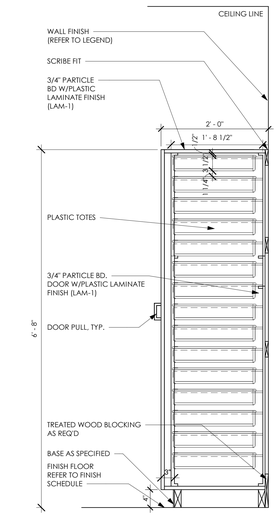

15 CASEWORK SECTION 22
1" = 1'-0"

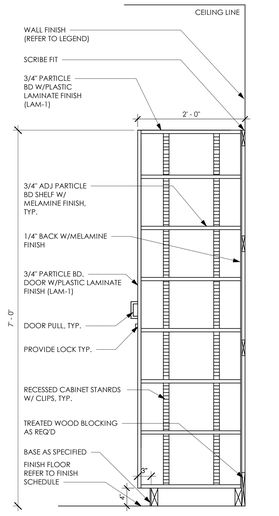

16 CASEWORK SECTION 23
1" = 1'-0"

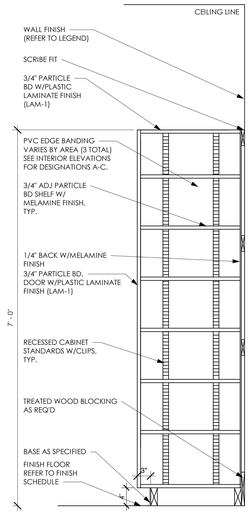

17 CASEWORK SECTION 1
1" = 1'-0"

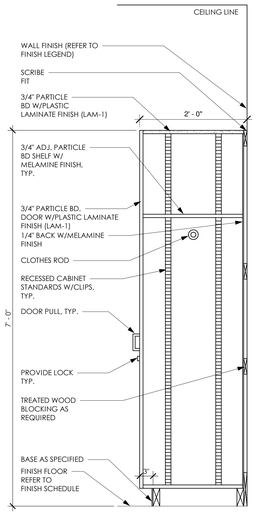

18 CASEWORK SECTION 2
1" = 1'-0"

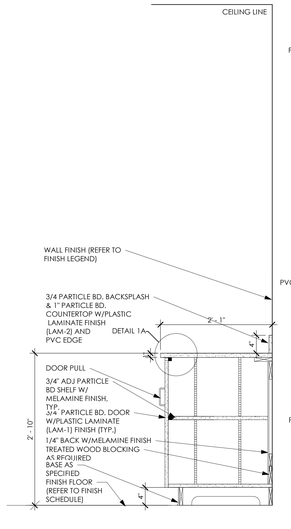

19 CASEWORK SECTION 21
1" = 1'-0"



20 DETAIL 1A
3" = 1'-0"



21 DETAIL 1B
3" = 1'-0"



22 DETAIL 1D
3" = 1'-0"



23. DETAIL 1C
3" = 1'-0"



24 CASEWORK DETAIL 1E
1" = 1'-0"

TYPICAL CASEWORK NOTES

1. VERIFICATION OF BUILDING DIMENSIONS TO BE CONFIRMED BY GENERAL CONTRACTOR PRIOR TO CONSTRUCTION.
2. WALL/FLOOR AREA SPECIFIED FOR PRODUCT INSTALLATION MUST BE FREE OF OBSTRUCTIONS SUCH AS LIGHT SWITCHES, OUTLETS, HVAC, CLOCK, SEE TECHNOLOGY DWGS.S, SIGNS, ETC.
3. CASEWORK SUPPLIER TO PROVIDE FILLER PIECES AFTER REVIEWING DRAWINGS AND GENERAL CONTRACTOR PERFORMS VERIFICATION OF BUILDING DIMENSIONS.
4. END COVER PANELS AND FILLER PIECES ARE TO BE INCLUDED IN BID PRICE AND SHOWN AS PER DRAWING AND AS DETERMINED IN FIELD FROM BUILDING DIMENSION VERIFICATION.
5. CORNER CABINET PLACEMENTS TO BE VERIFIED BY CABINET INSTALLER.
6. CASEWORK SUPPLIER TO PROVIDE FINISHED END PANELS WHERE CASEWORK IS EXPOSED / VISIBLE.
7. IF ELECTRICAL OUTLETS OR RACEWAYS ARE LOCATED INSIDE OR BEHIND OR ARE PART OF THE CABINET, CASEWORK MANUFACTURER SHALL PROVIDE CUTOUTS AND COORDINATE CUTOUT SIZE AND LOCATION IN FIELD WITH ELECTRICAL CONTRACTOR.
8. IF CASEWORK IS LOCATED IN FRONT OF WINDOWS AND HIGHER THAN THE WINDOW SILL, THAT CABINET SHOULD HAVE FINISHED BACK. VERIFY IN FIELD.
9. PROVIDE FIRE RETARDANT TREATED BLOCKING AS REQUIRED FOR CABINET AND METAL SHELF ATTACHMENT IN M ETAL FRAMED STUD WALLS.
10. ROUGH OPENING OF 7'-6" HEIGHT IS REQUIRED FOR TALL CABINET INSTALLATION
11. SEE AF-501 FOR TYPICAL CASEWORK MOUNTING HEIGHTS
12. CONTRACTOR TO INCLUDE PRICE FOR LABOR AND MATERIAL FOR GROMMETS AS NEEDED. GROMMETS SHALL BE 3" ROUND, COLOR SELECTED BY INTERIOR DESIGNER. HOLES ARE TO BE CUT IN CASEWORK IN FIELD. LOCATIONS TO BE DETERMINED BY ARCHITECT.
13. SEE ELEVATIONS FOR DOOR SWING.
14. LAMINATE COLOR TO BE CHOSEN BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.

PROJECT NO
2203-2

ARCHITECTURAL VISION GROUP, LTD
ARCHITECTS ◦ PLANNERS
23850 SPERRY DRIVE CLEVELAND, OHIO 44145

PROFESSIONAL SEAL:
SYED A. ABBAS
REGISTERED ARCHITECT
09376
SYED ABBAS, LICENSE #ARC-9310576
EXPIRATION DATE 10/31/2023

CONSULTANT:

MASSILLON CITY SCHOOLS
MASSILLON EAST ELEMENTARY PK-3
1 PAUL E BROWN DRIVE SE, MASSILLON, OHIO 44646
MASSILLON CITY SCHOOL DISTRICT MASSILLON, OHIO

MARK	DATE	ISSUED AS:
	7.22.22	100% BID PERMIT SET

DESCRIPTION

PROJECT NO	2203-2
DRAWN BY	Author
CHECKED BY	Checker
DATE	

CASEWORK DETAILS

SCALE: As indicated

SHEET NO
AF-501