

1

1

2


3

4


5

6

7

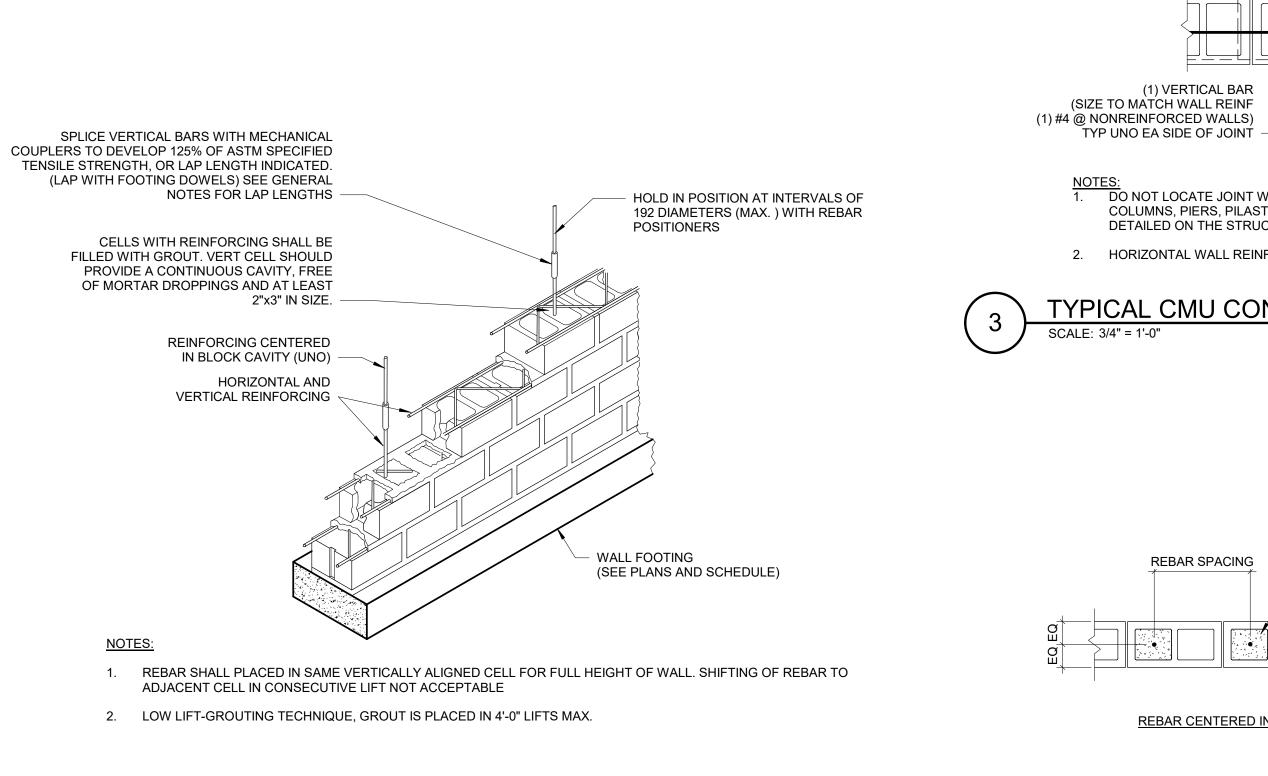



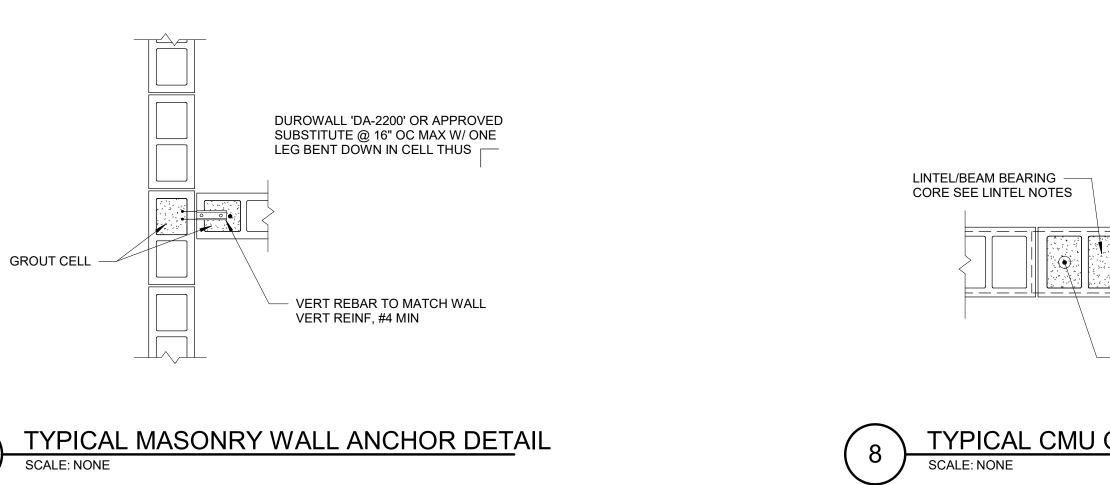

STEEL LINTEL SCHEDULE									
MARK	SIZE	MAX SPAN	BRG PL	CONFIGURATION	COMMENTS				
L1	L3 1/4 x 3 1/2 x 5/16	4'-0" OR LESS	NONE		6" MIN. BEARING				
L2	L4 x 3 1/2 x 5/16 (LLV)	4'-1" TO 6'-0"	NONE		6" MIN. BEARING				
L3	L5 x 3 1/2 x 5/16 (LLV)	6'-1" TO 7'-0"	NONE		6" MIN. BEARING				
L4	L6 x 3 1/2 x 5/16 (LLV)	7'-1" TO 8'-0"	NONE		8" MIN. BEARING				
L5	W8x24 x 3/8" PLATE	8'-1" TO 10'-0"	3/8" x 7 1/2" x 7 1 /2"	I	12" MIN. BRG; CENTER IN CMU				
L6	W16x26 x 3/8" PLATE	10'-1" TO 12'-0"	3/8" x 7 1/2" x 7 1 /2"	I	12" MIN. BRG; CENTER IN CMU				
L7	W16x40 x 3/8" PLATE	PER PLAN	5/8" x 7 1/2" x 1'-5"	I	1'-5" MIN. BRG; CENTER IN CMU				

NOTES:

8

7

1. L1 TO L4 : PROVIDE ONE ANGLE PER 4" OF WALL WIDTH

2. BOTTOM PLATE + ANGLE ASSEMBLY MAY BE REQUIRED TO SUPPORT VENEER, SEE WALL SECTIONS AND COORDINATE WALL FINISH WITH ARCHITECTURAL DRAWINGS.

3. LINTELS WITH BOTTOM PLATE: BOTTOM PLATE WIDTH TO BE 1" LESS THAN NOMINAL WALL WIDTH

4. ALL LINTELS AND ALL COMPONENTS IN EXTERIOR WALLS SHALL BE GALVANIZED

5. PROVIDE LINTEL FROM THIS SCHEDULE FOR ALL LINTELS NOT SHOWN ON DRAWINGS FOR DOORS, WINDOWS, RECESSES, LOUVERS, DUCTS, ALL OPENINGS, ETC. THAT ARE NOT PART OF A LOAD BEARING MASONRY WALL

JOIST AND LINTEL BEARING PLATE SCHEDULE						
MARK	SIZE	REMARKS				
BP1	3/8" x 3 1/2" x 9"	TYP K-SERIES JOIST BEARING				
BP2	5/8" x 5 1/2" x 9"	TYP LH & DLH SERIES JOIST BEARING				
BP3	3/8" x 6 1/2" x 9"	TYP K-SERIES JOIST BEARING ON BOTH SIDES OF 8" WALL				
BP4	3/8" x 10 1/2" x 9"	TYP K-SERIES JOIST BEARING ON BOTH SIDES OF 12" WALL				
BP5	5/8" x 10 1/2" x 9"	TYP LH & DLH SERIES JOIST BEARING ON BOTH SIDES OF 12" WALL				
BP6	3/8" x 6 1/2" x 8"	TYP MEMBER PERPENDICULAR TO WALL W/ END CONCEALED				
BP7	3/8" x 7 1/2" x (Bf + 1")	TYP MEMBER PERPENDICULAR TO WALL				
BP8	3/8" x 7 1/2" x (Bf + 1")	TYP MEMBER PARALLEL TO WALL; MIN. BRG PLATE UNO				

(	(1) VERTICAL BAR (SIZE TO MATCH WALL REINF (1) #4 @ NONREINFORCED WALLS) TYP UNO EA SIDE OF JOINTSTOP HORIZ. JOINT REINF.	
	NOTES: 1. DO NOT LOCATE JOINT WITHIN VERTICALLY REINFORCED ELEMENTS SUCH AS COLUMNS, PIERS, PILASTERS, OR OPENING JAMBS UNLESS SPECIFICALLY DETAILED ON THE STRUCTURAL DRAWINGS.	
(3)-	2. HORIZONTAL WALL REINFORCING CONTINUES THROUGH JOINT. TYPICAL CMU CONTROL JOINT DETAIL SCALE: 3/4" = 1'-0"	
	REBAR SPACING GROUT SOLID	
	REBAR CENTERED IN CELL REBAR AT EACH FACE OF CELL	
	NOTE: 1. USE SPACERS TO HOLD REBAR IN POSITION WHILE GROUTING, TYP	
4-	TYPICAL CMU REBAR LAYOUT SCALE: NONE	
	UNTEL/BEAM BEARING SEE ARCH LINTEL/BEAM BEARING CORE SEE LINTEL NOTES CORE SEE LINTEL NOTES	
	REINFORCE AND GROUT CORES ADJACENT TO LINTEL BEARINGS SOLID. SEE PLANS	
8-	TYPICAL CMU OPENING DETAIL SCALE: NONE	
rs	BOND BEAM SCHEDULE   WALL THICKNESS REBAR	
RING RING RING	6" (1) #5   8" (2) #5   10" (2) #5   12" (2) #5	
RING TER IN CMU TER IN CMU	12" (2) #5	
TER IN CMU		
CTS, ALL		
	MASONRY LINTEL SCHEDULE     MARK   WIDTH   DEPTH   MAX SPAN   REINFORCING   BEARING   CASE	
	ML1 8" 8" 4'-0" 2 - #5 8" A   NOTES: 1. PROVIDE STANDARD HOOK AT END OF EA HORIZONTAL REBAR	
_		
	GROUT SOLID SEE SCHEDULE FOR REBAR SIZE AND QUANTITY	
	<u>CASE A</u>	
	12 13 14	

TYP JOINT WIDTH


╧╹╗╤╼╱╤╼╱╧

PREMOLDED — HORIZONTAL JOINT

RUBBER FILLER / REINFORCEMENT

FILL WITH SEALANT

EACH SIDE. SEE SPECS. -



9 10 11

