


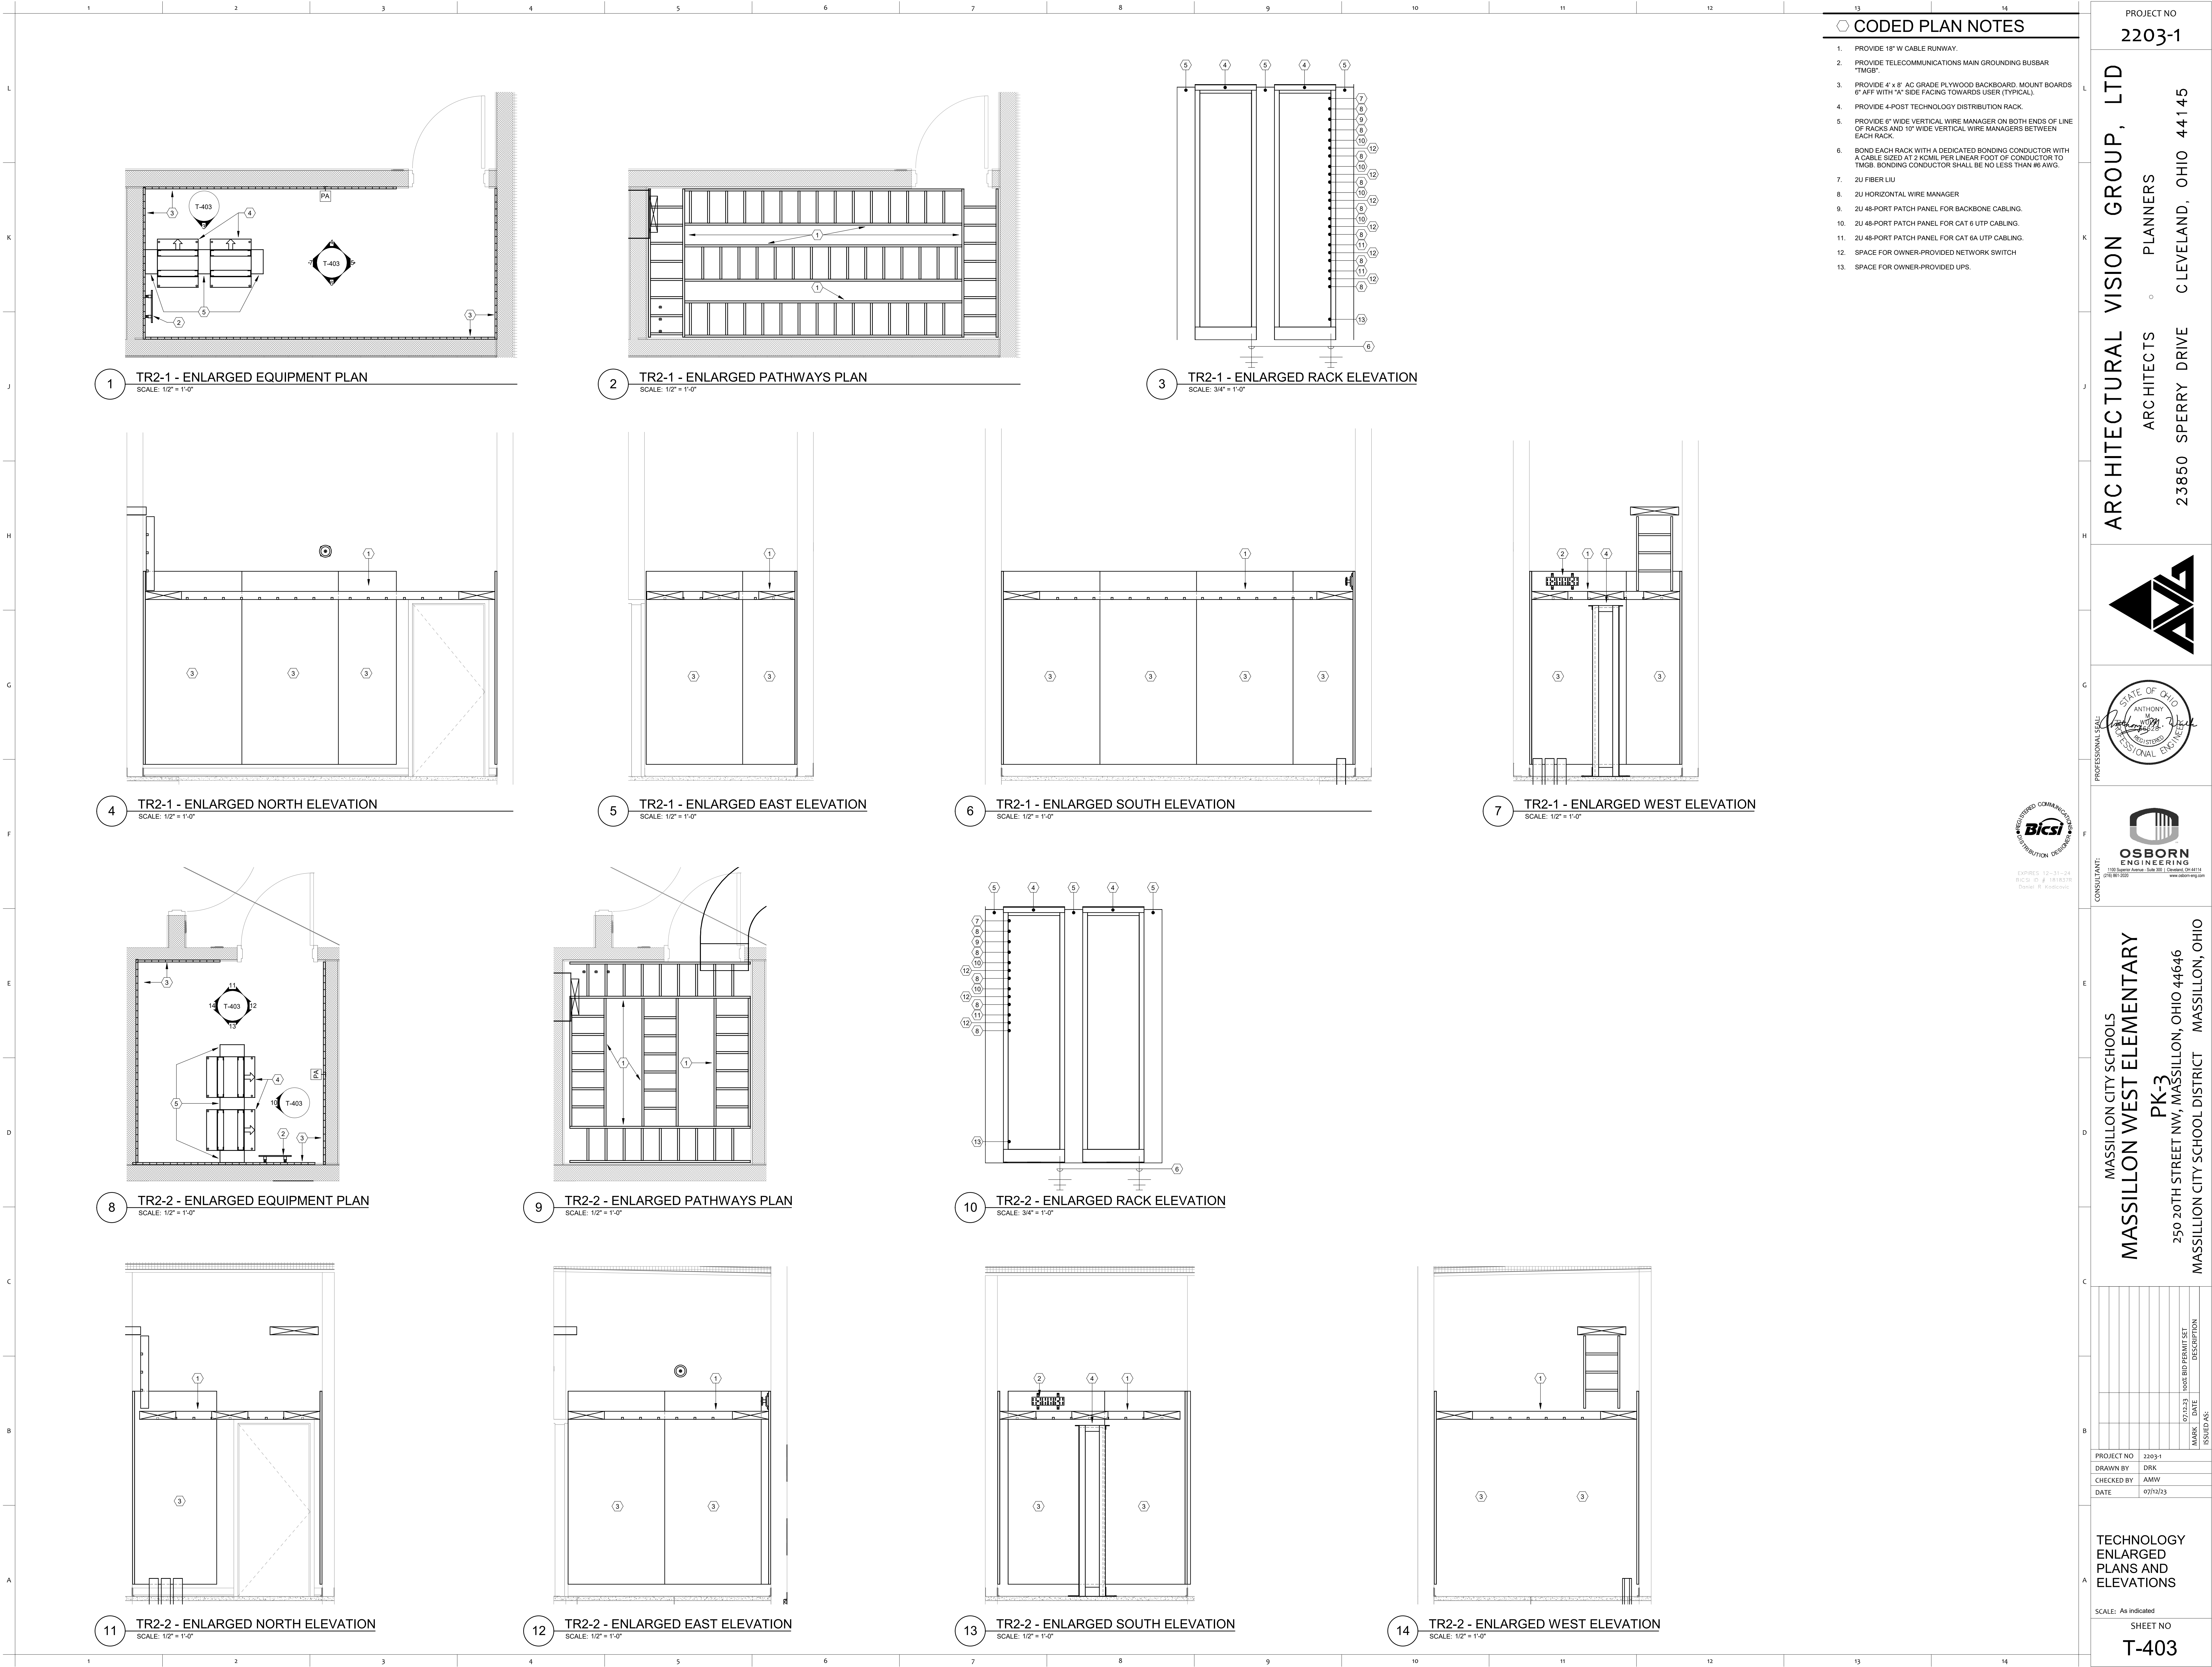


CODED PLAN NOTES

1. PROVIDE 18" W CABLE RUNWAY.
2. PROVIDE TELECOMMUNICATIONS MAIN GROUNDING BUSBAR "TMGB".
3. PROVIDE 4" x 8" AC GRADE PLYWOOD BACKBOARD. MOUNT BOARDS 6" AFF WITH 1" SIDE FACING TOWARDS USER (TYPICAL).
4. PROVIDE 4-POST TECHNOLOGY DISTRIBUTION RACK.
5. PROVIDE 6" WIDE VERTICAL WIRE MANAGER ON BOTH ENDS OF LINE OF RACKS AND 10" WIDE VERTICAL WIRE MANAGERS BETWEEN EACH RACK.
6. BOND EACH RACK WITH A DEDICATED BONDING CONDUCTOR WITH A CABLE SIZED AT 2 KCML PER LINEAR FOOT OF CONDUCTOR TO TMGB. BONDING CONDUCTOR SHALL BE NO LESS THAN #6 AWG.
7. 2U FIBER LIU
8. 2U HORIZONTAL WIRE MANAGER
9. 2U 48-PORT PATCH PANEL FOR BACKBONE CABLING.
10. 2U 48-PORT PATCH PANEL FOR CAT 6 UTP CABLING.
11. 2U 48-PORT PATCH PANEL FOR CAT 6A UTP CABLING.
12. SPACE FOR OWNER-PROVIDED NETWORK SWITCH
13. SPACE FOR OWNER-PROVIDED UPS.

PROJECT NO
2203-1

ARCHITECTURAL VISION GROUP, LTD
ARCHITECTS
PLANNERS
23850 SPERRY DRIVE
CLEVELAND, OHIO 44145

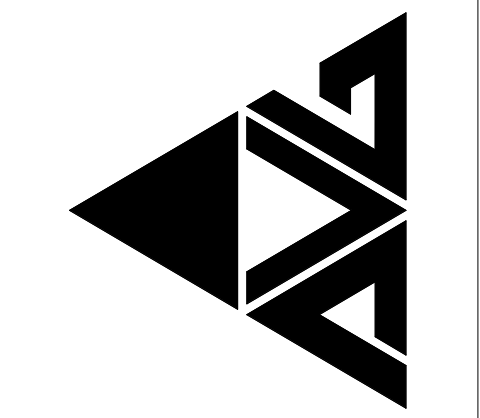

CONSULTANT:
OSBORN ENGINEERING
100 Superior Avenue, Suite 200, Cleveland, OH 44114
(216) 861-2025
www.osborn-eng.com

MASSILLON CITY SCHOOLS
MASSILLON WEST ELEMENTARY
PK-3
250 20TH STREET NW, MASSILLON, OHIO 44646
MASSILLON CITY SCHOOL DISTRICT MASSILLON, OHIO

MARK	DATE	ISSUED AS	DESCRIPTION
10/1/23	10/1/23	ISSUED AS	100% BID PERMIT SET

PROJECT NO 2203-1
DRAWN BY DRK
CHECKED BY AMW
DATE 07/12/23

TECHNOLOGY
ENLARGED
PLANS AND
ELEVATIONS
SCALE: As Indicated
SHEET NO
T-403