ANY INFORMATION OR DATA ON THIS DRAWING IS NOT INTENDED TO BE SUITABLE FOR REUSE BY ANY PERSON, FIRM OR CORPORATION OR ANY OTHERS ON EXTENSIONS OF THIS PROJECT OR FOR ANY USE OR ON ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION AND ADAPTATION BY THE ENGINEER, ARCHITECT OR SURVEYOR FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT THE USERS SOLE RISK AND WITHOUT LIABILITY OR LEGAL EXPOSURE TO THE ENGINEER, ARCHITECT OR SURVEYOR.

50' R/W
TYPICAL WALE SECTION

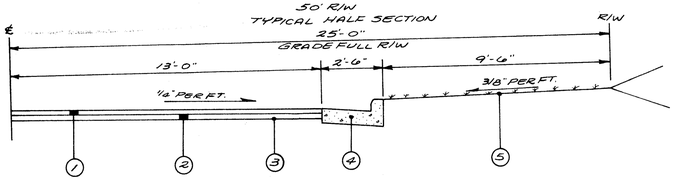

1. ITEM 404 1½" ASPHALT CONCRETE
2. ITEM 301 3½" BITUMINOUS AGGREGATE BASE
3. ITEM 203.15 COMPACTED SUBGRADE
4. ITEM 609 TYPE 2 CONCRETE CURB & GUTTER
5. ITEM 659 SEEDING AND MULCHING

NOTE: TACK COAT, ITEM 407, AS REQUIRED

FINAL SURVEY — SURVEYED, DRAFTED, TEMPLATE, NOTE BOOK, AREAS, NO., AREAS CHECKED, BY, DATE



TYPICAL DITCH SECTION

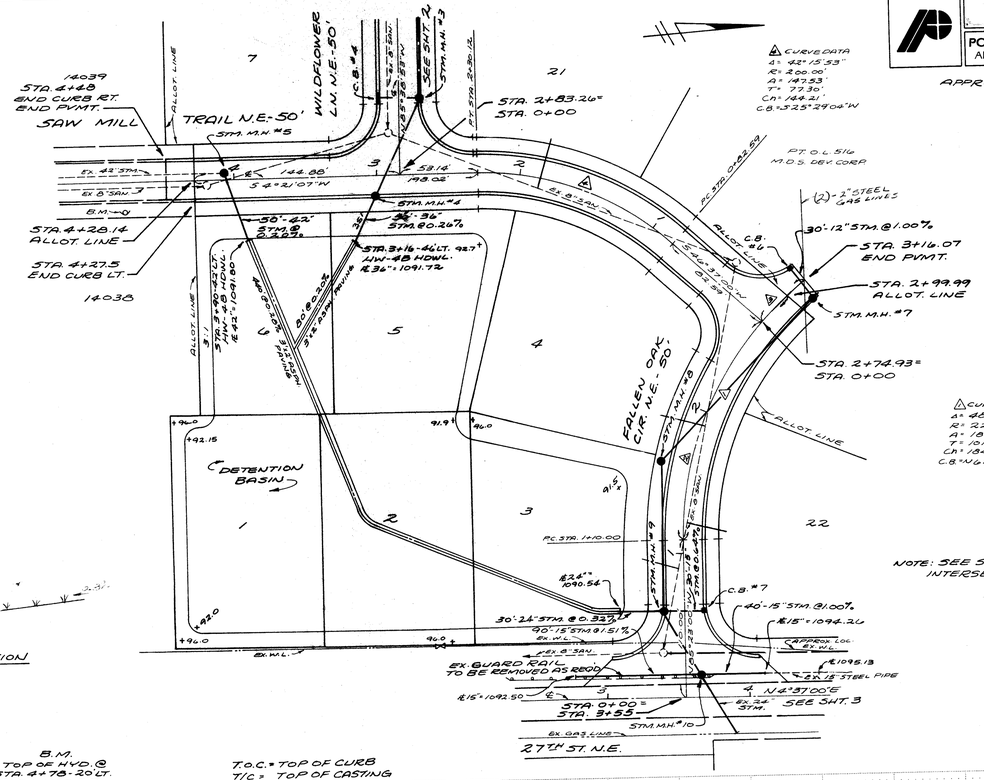
14039
STA. 4+48
END CURB RT.
END PVMT.
SAW MILL TRAIL N.E.-50'
STM. M.H. #5
ALLOT. LINE
WILDFLOWER LN. N.E.-50'
STM. M.H. #3
SEE SHT. 2
STA. 2+83.26 =
STA. 0+00
STA. 4+28.14
ALLOT. LINE
STA. 4+27.5
END CURB LT.
14038
STA. 3+16.46 LT. 92.7°
1 - 48" HDWL.
INV. = 1091.72
STA. 3+16.07
END PVMT.
STA. 2+99.99
ALLOT. LINE
STM. M.H. #7
STA. 2+74.93 =
STA. 0+00
FALLEN OAK CIR. N.E.-50'
STM. M.H. #8
DETENTION BASIN
ALLOT. LINE
STA. 2+83.26 =
STA. 0+00
STM. M.H. #4
STA. 3+55 -
STM. M.H. #10
27TH ST. N.E.
EX. GUARD RAIL TO BE REMOVED AS REQ'D
SEE SHT. 3
EX. 24" STM.
EX. 18" STEEL PIPE
EX. GAS LINE
EX. W.L.
EX. M.H.
EX. 8" SAN.
EX. 42" STM.
EX. 8" SAN.
EX. 8" SAN. FORCE MAIN
EX. 12" STM.
EX. 8" SAN.
EX. 8" SAN.
EX. 8" SAN